



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockoutappliances.com



KRM LOTO BALL VALVE LOCKOUT





OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269




GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO BALL VALVE LOCKOUT DEVICES

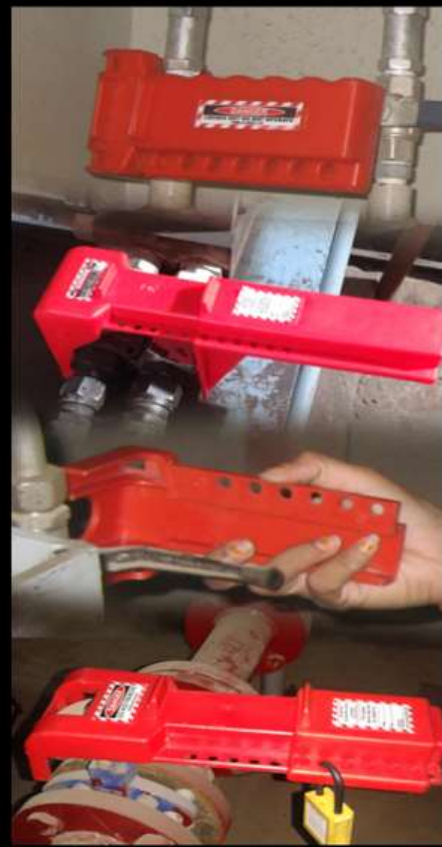

KRM-K-BV-02L		KRM-K-BV-01-ST		KRM-K-BV-01-LL		KRM-K-BV-01-ST-EX	
KRM-K-BV-01-DL		KRM-K-BV-01-DL-LL		KRM-K-BV-01-DL-EX		KRM-K-BV-02L	
MODELS	WIDTH (A)	HEIGHT (B)	LENGTH OF HANDLE (C)	LOCK HOLE (D)	NUMBER OF HOLES (E)	KRM-K-BV-03-BF	
KRM-K-BV-01-ST	75mm	77mm	135mm-230mm	9mm	7 Holes Upper side 6 Holes lower side		
KRM-K-BV-01-DL					6 Holes Upper side 10 Holes lower side		
KRM-K-BV-01-LL	75mm	77mm	190mm-268mm	9mm	13 Holes Upper side 6 Holes lower side		
KRM-K-BV-01-DL-LL					Upper Part Hole-6 Lower Part Hole-12		
KRM-K-BV-02 L	100mm	180mm	290mm-515mm	9mm			
KRM-K-BV-03-BF	300-385mm	64mm	100mm	9mm			



LOTO ADVISOR: Mr. Rajinder Wadhwa
 +91 9810 291 381, 8800 544 881
 www.krmcorporation.com

Tel : +91 129-4021381
 Postal add. : 615, Sector-15A Faridabad - 121007, Haryana, India
 Email : info@krmcorporation.com, wadharajinder@gmail.com



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



BALL VALVE & BUTTERFLY VALVE LOCKOUT

CE
Certified



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Productsto meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lockouttagouts.com

**KRM LOTO – BALL VALVE LOCKOUT DEVICE-INDEX****Index Page No:-4**

SR.NO	KRM LOTO PART CODE	PRODUCT NAME	WEIGHT (kg)	TECHNICAL PAGE NO.
1	KRM-K-BV-01-ST	Ball Valve Lockout - Standard - Small for Valves from - 9.5 mm to 31.5 mm (3/8" to 1 1/4")	0.140	6-7
2	KRM-K-BV-01-LL	Ball Valve Lockout - Standard-small with long open length for valves up to 2-1/2"(63.5 mm)	0.160	6-7
3	KRM-K-BV-01-ST-EX	Ball Valve Lockout - Standard - Small for Valves from - 9.5 mm to 31.5 mm (3/8" to 1 1/4")with side extension s attachment	0.180	6-7
4	KRM-K-BV-01-DL	BALL VALVE LOCKOUT – DOUBLE LEG FOR VALVES UP TO 2-1/2"	0.150	8-9
5	KRM-K-BV-01-DL-LL	BALL VALVE LOCKOUT - DOUBLE LEG WITH LONG OPEN LENGTH FOR VALVES UP TO 2-1/2"	0.170	8-9
6	KRM-K-BV-01-DL-EX	BALL VALVE LOCKOUT – DOUBLE LEG FOR VALVES UP TO 2-1/2" (63.5 MM) WITH SIDE EXTENSION	0.220	8-9
7	KRM-K-BV-02L	BALL VALVE LOCKOUT FOR VALVES FROM 2" - 8" (50.8 MM TO 203.20MM)	0.570	10-11
8	KRM-K-MTRBVL	MINI TOP RAIL BALL VALVE LOCKOUT - STANDARD COLOR RED	0.140	12-13
9	KRM-K-LTRBVL	TOP RAIL BALL VALVE LOCKOUT - STANDARD COLOR RED	0.350	12-13

**KRM LOTO – BALL VALVE LOCKOUT DEVICE-INDEX****Index Page No:-5**

SR.NO	KRM LOTO PART CODE	PRODUCT NAME	WEIGHT (kg)	TECHNICAL PAGE NO.
10	KRM-K-MBVS	METAL BALL VALVE LOCKOUT - SMALL 1/4"-1"	0.080	14-15
11	KRM-K-MBVL	METAL BALL VALVE LOCKOUT - STANDARD, HOLE DIAMETER 9/32	0.350	14-15
12	KRM-K-ABVL	KRM LOTO – ADJUSTABLE – BALL VALVE LOCKOUT SIZE: 6.35(1/4")MM TO 140(5")MM FLANGE	0.220	16-17
13	KRM-K-BV-03-BF	BUTTERFLY VALVE LOCKOUT	0.30	18-19
14	KRM-K-UBF-A	KRM LOTO – ADJUSTABLE – UNIVERSAL BUTTERFLY VALVE LOCKOUT	0.040	20-21
15	KRM-K-UBF-RMCLT	UNIVERSAL BUTTERFLY VALVE LOCKOUT WITH ROUND MULTIPURPOSE CABLE LOCKOUT	0.150	20-21
16	KRM-K-UBF-MPS	UNIVERSAL BUTTERFLY VALVE LOCKOUT WITH MULTIPURPOSE SCISSOR CABLE LOCKOUT	0.150	20-21
17	KRM-K-UBF-MCLT	UNIVERSAL BUTTERFLY VALVE LOCKOUT WITH METAL CABLE LOCKOUT	0.150	20-21



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269

www.lockouttagouts.com



BALL VALVE LOCKOUT- KRM-K-BV-01-ST/LL

- KRM LOTO Ball valve lockout's body in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalogue.
- Resistant to low and high temperature variation 45o Celsius to 200o Celsius.
- It is very indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve from handle being turned.
- **Material** - Poly Propylene - UV color with identifiable DANGER or CAUTION label.
- **Model** - Standard small with seven or six holes for locking on both parts will match for group locking.
- **Extension** - 88 mm x 127 mm.
- Ball valve lockout device designed to lock pipes 0.374 up to 1.24" in outer diameter
- **Color** - Standard color Red or any color make as per volume.



KRM-K-BV-01-ST



KRM-K-BV-01-LL



KRM-K-BV-01-ST-EX

MODELS	WIDTH	HEIGHT	LENGTH HANDLE	LOCK HOLE	NUMBERS OF HOLE
KRM-K-BV-01-ST SIZE - 9.5 mm to 31.5 mm	75mm	77mm	135 -230mm	9mm	7 Holes Upper side 6 Holes Lower side
KRM-K-BV-01-LL	75mm	77mm	135-280mm	9mm	6 Holes Upper side 10 Holes Lower side
KRM-K-BV-01-ST-EX	Same Specification as mention above with extension piece having dimension. Overall Height 125mm and Width 99mm				
KRM-K-BV-01-LL-EX	Same Specification as mention above with extension piece having dimension. Overall Height 125mm and Width 99mm				



KRM **Lock Tag!**
OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products
to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

LOCKOUT/TAGOUT



BALL VALVE LOCKOUT(KRM-K-BV-01-ST/LL)

CE Certified

- KRM LOTO Ball valve lockout's body in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalogue. Resistant to low and high temperature variation 45o Celsius to 200o Celsius.
- It is very indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve from handle being turned.
- **Material** - Poly Propylene - UV color with identifiable DANGER or CAUTION label.
- **Model** - Standard small with seven or six holes for locking on both parts will match for group locking.
- **Extension** - 88 mm x 127 mm.
- Ball valve lockout device designed to lock pipes 0.374 upto 1.24" in outer diameter
- **Color** - Standard color Red or any color make as per volume.



KRM-K-BV-01-ST



KRM-K-BV-01-LL



KRM-K-BV-01-ST-EX

MODELS	WIDTH (A)	HEIGHT (B)	LENGTH OF HANDLE(C)	LOCK HOLE (D)	NUMBER OF HOLES (E)
KRM-K-BV-01-ST SIZE - 9.5 mm to 31.5 mm	75mm	77mm	135mm-230mm	9mm	7 Holes Upper side 6 Holes Lower side
KRM-K-BV-01-LL	75mm	77mm	135mm-280mm	9mm	6 Holes Upper side 10 Holes Lower side
KRM-K-BV-01-ST-EX	Same Specification as mention above with extension piece having dimension. Overall Height 125mm and Width 99mm				
KRM-K-BV-01-LL-EX	Same Specification as mention above with extension piece having dimension. Overall Height 125mm and Width 99mm				



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.locktagindia.com



BALL VALVE LOCKOUT-KRM-K-BV-01-DL/DL-LL

- KRM LOTO Ball valve lockout's body in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalogue.
- Resistant to low and high temperature variation 45o Celsius to 200o Celsius.
- It is very indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve from handle being turned.
- **Material** - Poly Propylene - UV color with identifiable DANGER or CAUTION label.
- **Model** - Standard small with seven or six holes for locking on both parts will match for group locking.
- Ball valve lockout device designed to lock pipes 0.5" up to 2.5" in outer diameter
- **Color** - Standard color Red or any color make as per volume.



KRM-K-BV-01-DL



KRM-K-BV-01-DL-LL



KRM-K-BV-01-DL-EX

MODELS	WIDTH	HEIGHT	LENGTH HANDLE	LOCK HOLE	NUMBERS OF HOLE
KRM-K-BV-01-DL SIZE - Double Legs for valve pipe up to 63.5 mm	75mm	77mm	135 -230mm	9mm	7 Holes Upper side 6 Holes Lower side
KRM-K-BV-01-DL-LL SIZE - Double Legs for valve pipe up to 63.5 mm	75mm	77mm	135-280mm	9mm	6 Holes Upper side 10 Holes Lower side
KRM-K-BV-01-DL-EX	Same Specification as mention above with extension piece having dimension. Overall Height 125mm and Width 99mm				
KRM-K-BV-01-DL-LL-EX	Same Specification as mention above with extension piece having dimension. Overall Height 125mm and Width 99mm				



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA
www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT



BALL VALVE LOCKOUT(KRM-K-BV-01-DL/DL-LL)

CE Certified



KRM-K-BV-01-DL





KRM-K-BV-01-DL-LL



KRM-K-BV-01-DL-EX

- KRM LOTO Ball valve lockout's body in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalogue.
- Resistant to low and high temperature variation 45o Celsius to 200o Celsius.
- It is very indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve from handle being turned.
- **Material** - Poly Propylene - UV color with identifiable **DANGER** or **CAUTION** label.
- **Model** - Standard small with seven or six holes for locking on both parts will match for group locking.
- Ball valve lockout device designed to lock pipes 0.5" up to 2.5" in outer diameter
- **Color** - Standard color Red or any color make as per volume.



MODELS	WIDTH (A)	HEIGHT (B)	LENGTH OF HANDLE(C)	LOCK HOLE (D)	NUMBER OF HOLES (E)	WEIGHT
KRM-K-BV-01-DL SIZE - Double Legs for valve pipe upto 63.5 mm	75mm	77mm	135mm-280mm	9mm	7 Holes Upper side 6 Holes Lower side	150gm
KRM-K-BV-01-DL-LL SIZE - Double Legs for valve pipe upto 63.5 mm	75mm	77mm	135mm-280mm	9mm	6 Holes Upper side 10 Holes Lower side	170gm
KRM-K-BV-01-DL-EX	Same Specification as mention above with extension piece having dimension. Overall Height 125mm and Width 99mm					190gm
KRM-K-BV-01-DL-LL-EX	Same Specification as mention above with extension piece having dimension. Overall Height 125mm and Width 99mm					210gm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



BALL VALVE LOCKOUT-KRM-K-BV-02L

- KRM LOTO Ball valve lockout's body in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalogue. Resistant to low and high temperature variation 45o Celsius to 200o Celsius.
- It is very indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve from handle being turned.
- Material** - Poly Propylene - UV color with identifiable DANGER or CAUTION label.
- Model** - Standard small with even or six holes for locking on both parts will match for group locking.
- For use on ball valve sizes from 2" to 8", Large lockout locks out pipes 2" to 8" in diameter, Outside pipe diameter 2" - 8"
- Color** - Standard color Red or can make any color as per volume.
- Weight – 570gm



KRM-K-BV-02L



MODELS	WIDTH	HEIGHT	LENGTH HANDLE	LOCK HOLE	NUMBERS OF HOLE
KRM-K-BV-02L	100mm	180mm	290mm-515mm	9mm	13 Holes Upper side 6 Holes Lower side



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT




BALL VALVE LOCKOUT(KRM-K-BV-02L)



KRM-K-BV-02L



- KRM LOTO Ball valve lockout's body in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalogue. Resistant to low and high temperature variation 45o Celsius to 200o Celsius.
- It is very indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve from handle being turned.
- **Material** - Poly Propylene - UV color with identifiable **DANGER** or **CAUTION** label.
- **Model** - Standard small with even or six holes for locking on both parts will match for group locking.
- For use on ball valve sizes from 2" to 8", Large lockout locks out pipes 2" to 8" in diameter, Outside pipe diameter 2" - 8"
- **Color** - Standard color Red or can make any color as per volume.
- **Weight** - 570 gm



MODELS	WIDTH (A)	HEIGHT (B)	LENGTH OF HANDLE(C)	LOCK HOLE (D)	NUMBER OF HOLES (E)
KRM-K-BV-02L	100 mm	180 mm	290mm-515mm	9mm	13 Holes Upper side 6 Holes lower side



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com



TOP RAIL BALL VALVE LOCKOUT

- KRM LOTO Top Rail Ball valve lockout is a simple and a quick way to prevent ball valve that is used in open condition on pipes - 12 to 37 mm in diameter.
- **Material** - Poly Propylene - UV Color.
- **Model** - Mini Top Rail and Large Top Rail.
- **Mini Top Rail** model suitable for application 12 mm to 62.5 mm (0.472" to 2.461") diameter pipe.
- **Large Top Rail** model suitable for application 50 mm to 200 mm (2" to 7.8") diameter pipe.
- **Color** - Standard color Red or any color as per the required quantity.
- **Weight** – KRM-K-MTRVL- 200gm, KRM-K-LTRVL-350gm



KRM-K-MTRBVL



KRM-K-LTRBVL



MODELS	WIDTH	HEIGHT	LENGTH HANDLE	LOCK HOLE dia	NUMBERS OF HOLE
KRM-K-MTRBVL	300-385mm	64mm	100mm	9mm	4-5
KRM-K-LTRBVL	300-385mm	64mm	100mm	9mm	6



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.locktagindia.com



LOCKOUT/TAGOUT



TOP RAIL BALL VALVE LOCKOUT

CE
Certified



KRM-K-MTRBVL



KRM-K-LTRBVL

- KRM LOTO Top Rail Ball valve lockout is a simple and a quick way to prevent ball valve that is used in open condition on pipes - 12 to 37 mm in diameter.
- **Material** - Poly Propylene - UV Color.
- **Model** - Mini Top Rail and Large Top Rail.
- Mini Top Rail model suitable for application 12 mm to 62.5 mm (0.472" to 2.461") diameter pipe.
- Large Top Rail model suitable for application 50 mm to 200 mm (2" to 7.8") diameter pipe.
- **Color** - Standard color Red or any color as per the required quantity.
- **Weight** – KRM-K-MTRVL- 140 gm, KRM-K-LTRVL-250 gm

MODELS	WIDTH	HEIGHT	LENGTH OF HANDLE	LOCK HOLE	NUMBER OF HOLES
KRM-K-MTRBVL	300-385mm	64mm	100mm	9mm	4-5
KRM-K-LTRBVL	300-385mm	64mm	100mm	9mm	6



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

METAL BALL VALVE LOCKOUT

- **Material** - Mild Stainless Steel.
- KRM LOTO Metal Ball valve lockout easy to use, single piece design makes our standard ball valve lockout the perfect tool for securing your valve handles in the off position. Hole diameter 9/32" padlock shackles.
- For use of **KRM-K-MBVL** from 1.25" to 3" (9/32" lock holes).
- For use of **KRM-K-MBVS** from 1/4" to 1".
- Temperature Range - 40 degree to 248 degree.
- **Holes** - 6 & 8
- **Color** - Standard color Red or any color as per required quantity.
- **Weight** – 80gm of KRM-K-MBVL, 350gm of KRM-K-MBVS



KRM-K-MBVL



KRM-K-MBVS

MODELS	A	B	C
KRM-K-MBVL	98mm	54mm	10mm
KRM-K-MBVS	151mm	112mm	10mm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockouttagouts.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT



METAL BALL VALVE LOCKOUT

KRM LOTO
EXPERT

CE
Certified



KRM-K-MBVL

KRM-K-MBVS

- Material - Mild Stainless Steel.
- KRM LOTO Metal Ball valve lockout easy to use, single piece design makes our standard ball valve lockout the perfect tool for securing your valve handles in the off position. Hole diameter 9/32" padlock shackles.
- For use of KRM-K-MBVL from 1.25" to 3" (9/32" lock holes).
- For use of KRM-K-MBVS from 1/4" to 1".
- Temperature Range - 40 degree to 248 degree.
- Holes - 6 & 8
- Color - Standard color Red or any color as per required quantity.
- Weight - 80gm of KRM-K-MBVL, 350gm of KRM-K-MBVS

MODELS	(A)	(B)	(C)
KRM-K-MBVS	98mm	54mm	10mm
KRM-K-MBVL	151mm	112mm	10mm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



KRM LOTO – ADJUSTABLE – BALL VALVE LOCKOUT

- KRM LOTO Ball valve lockout's body in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalog. Resistant to low and high temperature variation 45 degree Celsius to 200 degree Celsius.
- It is very indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve from handle being turned.
- **Material** - Poly Propylene
- **Dimension** – Total Length of open/close position 180/114mm
- **Hole Dia** – 8.5mm
- Total 7 holes and maximum 2 hole for lockout
- Its specialty is that its very flexible lockout arrangement that fits on valves of different dimensions, also very compact and easy carrying.
- **Color** - Red or any color make as per volume.



KRM-K-ABVL

A	B	C	D	E	F	G	H
180mm	114mm	55mm	110mm	105mm	40mm	47mm	78mm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockouttagouts.com



LOCKOUT/TAGOUT



ADJUSTABLE – BALL VALVE LOCKOUT

CE Certified

- KRM LOTO Ball valve lockout's body in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalog. Resistant to low and high temperature variation 45o Celsius to 200o Celsius.
- It is very indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve from handle being turned.
- **Material** - Poly Propylene
- **Dimension** – Total Length of open/close position 180/114mm
- **Hole Dia** – 8.5mm T
- Total 7 holes and maximum 2 hole for lockout
- Its specialty is that its very flexible lockout arrangement that fits on valves of different dimensions, also very compact and easy carrying.
- **Color** - Red or any color make as per volume.



KRM-K-ABVL

(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)
180mm	114mm	55mm	110mm	105mm	40mm	47mm	78mm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lockoutappliances.com



BUTTERFLY VALVE LOCKOUT- KRM-K-BV-03-BF

- **Material** – Poly Propylene-UV Color with identifiable DANGER label.
- KRM LOTO Ball Valve Lockout's body is in two parts, The butterfly valve lockout is a simple, effective way to secure your butterfly valves to prevent unauthorized operation working with low and High temperature variation – 45°C to 200°C.
- **Model** – Standard Small with six holes for Locking on both parts will match for Group locking
- Suitable for valve handle from 8mm to 45mm (0.3"-1.8")
- **Outer edge to edge Length** – 295 mm (11.61")
- **Color** – Standard color Red Or any color make as per the required quantity
- **Weight** – 300 gms



KRM-K-BV-03-BF

MODELS	WIDTH	HEIGHT	LENGTH OF HANDLE	LOCK HOLE	NUMBERS OF HOLE
KRM-K-BV-03-BF	300-385mm	64mm	100mm	9mm	Upper part 6 Holes Lower part 12 Holes



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana)

Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

LOCKOUT/TAGOUT



BUTTERFLY VALVE LOCKOUT

KRM LOTO
EXPERT


CE
Certified



KRM-K-BV-03-BF



- **Material** – Poly Propylene-UV Color with identifiable DANGER label.
- **KRM LOTO Ball Valve Lockout's** body is in two parts, The butterfly valve lockout is a simple, effective way to secure your butterfly valves to prevent unauthorized operation working with low and High temperature variation 45o Celsius to 200o Celsius.
- **Model** – Standard Small with six holes for Locking on both parts will match for Group locking
- **Size Applicable** – Suitable for valve handle from 8mm to 45mm(0.3"-1.8")
- **Outer edge to edge Length** – 295 mm (11.61")
- **Color** – Standard color Red Or any color make as per the required quantity
- **Weight** – 300 gm



MODELS	WIDTH (A)	HEIGHT (B)	LENGTH OF HANDLE(C)	LOCK HOLE (D)	NUMBER OF HOLES (E)
KRM-K-BV-03-BF	300-385mm	64mm	100mm	9mm	Upper Part Hole-6 Lower Part Hole-12



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO – ADJUSTABLE – UNIVERSAL BUTTERFLY VALVE LOCKOUT

- Butterfly valve lockout is used to lock hydraulic, pneumatic and chemical energies efficiently. Made of dielectric material and doesn't effected by any chemical, low in cost with high performance.
- **Material** – Poly Propylene
- KRM LOTO ADJUSTABLE – Universal Butterfly Valve Lockout is used to block the valve lever with trigger. Body of lockout is divided in two parts, the butterfly valve lockout is a simple, effective way to secure your butterfly valves to prevent unauthorized operation working with low and High temperature variation – 45°C to 200°C.
- Recommended to use with cable Lockout device for stronger strength and lesser possibilities for accidents.
- **Size Applicable** – Suitable for 8 mm to 45 mm valves
- **Color** – Red Or any color make as per the required quantity
- Can be provided with different options or combination:
 KRM-K-UBF-RMCLT – Universal Butterfly Valve Lockout with Round Multipurpose Cable Lockout
 KRM-K-UBF-MPS – Universal Butterfly Valve Lockout with Multipurpose Scissor Cable Lockout
 KRM-K-UBF-MCLT – Universal Butterfly Valve Lockout with Metal Cable Lockout



**KRM-K-UBF-A
 DEVICE ONLY**



KRM-K-UBF-RMCLT



KRM-K-UBF-MPS



KRM-K-UBF-MCLT



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockouttagouts.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT



ADJUSTABLE – UNIVERSAL BUTTERFLY VALVE LOCKOUT



- Butterfly valve lockout is used to lock hydraulic, pneumatic and chemical energies efficiently. Made of dielectric material and doesn't effected by any chemical, low in cost with high performance.
- **Material** – Poly Propylene
- **KRM LOTO ADJUSTABLE** – Universal Butterfly Valve Lockout is used to block the valve lever with trigger. Body of lockout is divided in two parts, the butterfly valve lockout is a simple, effective way to secure your butterfly valves to prevent unauthorized operation working with low and High temperature variation – 45o Celsius to 200o Celsius.
- Recommended to use with cable Lockout device for stronger strength and lesser possibilities for accidents.
- **Size Applicable** – Suitable for 8 mm to 45 mm valves
- **Color** – Red Or any color make as per the required quantity
- Can be provided with different options or combination:



- KRM-K-UBF-RMCLT – Universal Butterfly Valve Lockout with Round Multipurpose Cable Lockout
- KRM-K-UBF-MPS – Universal Butterfly Valve Lockout with Multipurpose Scissor Cable Lockout
- KRM-K-UBF-MCLT – Universal Butterfly Valve Lockout with Metal Cable Lockout



KRM-K-UBF-A
(Device only)



KRM-K-UBF-MPS



KRM-K-UBF-RMCLT



KRM-K-UBF-MCLT



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



For more details
login our website.

For more details on LOTO and Safety Products visit our website – www.krmcorporation.com

GSTIN No.: 06AACPW8746Q1Z6,
PAN No.: AACPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

Notes:

- Lock & Tag should be used with all loto products.
- For group locking on particular energy hasp should be used.
- Group lockout box should be used for group lockout tagout.
- Scissor Cable or Round cable lockout can be used to lock multiple hazardous energies instead putting individual locks & tags.