

NEW REVOLUTIONARY AS2000HAT - Salisbury by Honeywell's NEW revolutionary AS2000HAT is a Weight Balancing Arc Flash Protection Face Shield. The shield stows in a balanced, compact position, centered over the top of the hard hat when not in use. The AS2000HAT has an ATPV rating of 20 cal/cm² and utilizes nanotechnology to provide a clearer, more transparent window for improved visibility. The face shield unit includes ventilation ribs that allow a natural convection air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort.

NEW AS2000HAT SERIES

- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and is CSA standard compliant
- Tested to ASTM F2178 specifications

AS1200 SERIES

- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and is CSA standard compliant
- Tested to ASTM F2178 specifications

FACE SHIELD



CAT. NO.	DESCRIPTION
AS2000HAT	NEW 20 cal/cm ² , arc flash protection face shield unit w/SA79R03 hard hat
AS2000	NEW 20 cal/cm ² , arc flash protection face shield unit
AS2000FS	NEW Replacement face shield/window
AS1200HAT	Weight balancing arc flash protection face shield unit w/hard hat
AS1200HAT-CLR	AS1200HAT w/ transparent chin guard
AS1200	Weight balancing arc flash protection face shield unit.



UNIVERSAL FIT AS1200FB & AS1200U - Salisbury by Honeywell's NEW revolutionary AS1200FB and AS1200U are weight balancing arc flash protection face shield that fit ALL popular full brim (AS1200FB) or front brim (AS1200U) hard hats.

The AS1200FB and AS1200U assembly attaches to the full or front brim hard hat with an elastomeric band that secures the bracket onto the brim. All parts are dielectric and specifically designed for arc flash protection.

The AS1200FB and AS1200U have an ATPV rating of 12 cal/cm² (NFPA 70E HRC 2) and utilizes nanotechnology and an anti-fog coating, to provide a clearer, more transparent window for improved visibility. The face shield unit includes an upper bracket ventilation feature that allows a natural air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort for the user.

OPTIONAL ACCESSORIES

TRANSPARENT CHIN GUARD

The Transparent Chin Guard dramatically increases the user's peripheral view. The enhanced viewing area increases worker performance and productivity. The highly-transparent chin guard allows improved awareness and greater safety.

UNIVERSAL FIT PROTECTIVE FACE SHIELD



REVOLUTIONARY AS1200FB & AS1200U

- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and tested to ASTM F2178 specifications
- Unique weight balancing design
- Optional task light feature
- Replaceable window, no tools required
- AS1200FB fits all popular full brim hard hats
- AS1200U fits all popular front brim hard hats
- Ventilated design
- Adjustable pivot tension
- Can be easily removed from the hard hat
- One hand operation

PROTECTIVE FACE SHIELD OPTIONAL ACCESSORIES

AFLENS ANTI-FOG INNER LENS

- Includes an air spaced design that decreases fogging
- Natural convection air flow design also helps minimize fogging
- Shield meets the ASTM requirements for an Anti-Fog Lens

ASFL FLAME RESISTANT ATTACHABLE TASK LIGHTS

The arc tested ASFL arc rated task light features a high intensity long lasting white LED lamp with an overall brightness of 35 lumens. From a 24 inch distance, the beam is approximately 6-7 inch in diameter. The high intensity illumination is very useful when working up close. 2 AAA batteries provide 14-15 hours of high brightness.

NOTE: The AS1200HAT can hold 2 ASFL task lights. The FLKIT only contains 1 task light and 1 clip.

AS12CLR TRANSPARENT CHIN GUARD

The AS12CLR Transparent Chin Guard dramatically increases the user's peripheral view. The enhanced viewing area increases worker performance and productivity. The highly transparent chin guard allows improved awareness and greater safety.

FACE SHIELD ACCESSORIES



ASFL



FLCLIP (1)



AS12CLIP



AFLENSU



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

CAT. NO.	DESCRIPTION
AS1200	Weight balancing arc flash protection face shield unit.
AS1200FB	12 cal/cm ² , Universal fit, arc flash protection face shield unit for full brim hard hats.
AS120RG-FB	Orange chin guard for AS1200FB
AS12CLR-FB	Transparent chin guard for AS1200FB
AS1200FS-FB	Replacement face shield/window 12 cal/cm ² for AS1200FB full brim.
AS1200U	12 cal/cm ² , Universal fit, arc flash protection face shield unit for front brim hard hats.
AS12CLR	Transparent chin guard for AS1200 series front brim.
AS1200FS	Replacement window for AS1200 series front brim.
AS1200HAT	Weight balancing arc flash protection face shield unit w/ hard hat.
AS1200HAT-CLR	AS1200HAT w/ transparent chin guard.
AFLENS	Anti-fog inner lens
ASFL	Arc rated attachable task light (1)
AS12CLIP	Replacement clips set (2) for AS1200HAT shield.
FLCLIP	Attachable task light clip (1)
FLKIT	Attachable task light (1) & FLCLIP
AS12CLR	Transparent chin guard
AFLENSU	Inner Anti-Fog Lens for PRO-HOOD®

ANTI – FOG LENS



AS1000 SERIES

- 10 cal/cm² ATPV rating when used with the included chin cup
- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Shield meets current ANSI Z87.1 and tested to ASTM F2178 specifications

PROTECTIVE FACE SHIELD UNITS & ACCESSORIES



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

CAT. NO.	DESCRIPTION
AS1000	AS1000FS Shield w/ ASCP chin cup & slotted ASSLB BRACKET. Fits most slotted front brim hard hats.
AS1000U	AS1000FS Shield w/ ASCP chin cup & universal BRACKET. Fits most front brim hard hats.
AS1000FB	AS1000FS Shield w/ ASCP chin cup & universal FBBRACKET. Fits most full brim hard hats.
AS1000R	AS1000FSR Shield w/ ASCP chin cup and ASRHG 4 pin lock head band w/ 4" arc guard.
AS1000HAT	AS1000 w/ SA79R front brim hard hat.
ASBAG	Cotton canvas storage bag w/ drawstring closure & fleece interior, for AS1000 series products.
SA79* nylon	Peak front brim hard hat with rain trough, 4-Point suspension, pin-lock adjustment. ANSI & CSA Type I, Class E. Dielectrically rated. ANSI Z89.1-2003
SA79R*	Peak front brim hard hat with rain trough, 4-Point nylon suspension, ratcheting adjustment. ANSI & CSA Type I, Class E. Dielectrically rated. ANSI Z89.1-2003

PROTECTIVE FACE SHIELD UNITS & ACCESSORIES



*IMPORTANT - Please add the color code to the end of hard hat #
 (EX:SA7901 - White ANSI Type I, dielectric front brim hard hat w/quick-fit 4-Point suspension)

Color Codes	Stock Colors
01	White
02	Yellow
03	Orange



AS1000/AS1200/AS1500 & PRO-HOOD®

- 8 cal/cm² to 100 cal/cm² ATPV ratings
- 7.5" x 20" Viewing area for replacement AS1000 protective shield lenses
- 10" x 20" Viewing area for replacement PRO-HOOD® lenses
- 4000V and 10000V lenses have two layers of protection
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and tested to ASTM F2178 specifications

AFLENSU - The universal inner lens is a field installed anti-fog lens for PRO-HOOD® arc flash protective switching hoods. Installs quickly without tools to the inside of the PRO-HOOD® face shield and can be removed for cleaning or replacement.

REPLACEMENT ARC FLASH PROTECTION LENSES



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

CAT. NO.	DESCRIPTION
AS1000FS	Replacement face shield for AS1000HAT, AS1000FB and AS1000U. Used with the ASSLB, FBBRACKET, or BRACKET brackets and ASCP.
AS1000FSR	Replacement face shield for AS1000R. Used with the ASRHG4 bracket and ASCP.
AS1200FS	Replacement window for AS1200HAT, 12 cal/cm ² .
AFLENSU	Inner Anti-Fog Lens for PRO-HOOD®.
1000V	Replacement lens, with hook & pile attachment, for NEW DESIGN 8 cal/cm ² to 20 cal/cm ² PRO-HOOD®. Single layer lens. Used with the ASSLB, FBBRACKET, or BRACKET brackets.
2000V	Replacement lens, with hook & pile attachment, for OLDER DESIGN 8 cal/cm ² to 20 cal/cm ² PRO-HOOD®. Single layer lens. Used with the ASSLB, FBBRACKET, or BRACKET brackets.
4000V	Replacement lens, with hook & pile attachment, for 31 cal/cm ² to 55 cal/cm ² PRO-HOOD®. Dual layer lens. Used with the ASSLB, FBBRACKET, or BRACKET brackets.
4000VB	Replacement lens, with hook & pile attachment, for 31 cal/cm ² to 55 cal/cm ² PRO-HOOD®. Dual layer lens (clear and tinted). Includes BRACKET for front brim hard hat.
4000VFB	Replacement lens, with hook & pile attachment, for 31 cal/cm ² to 55 cal/cm ² PRO-HOOD®. Dual layer lens (clear and tinted). Includes FBBRACKET for full brim hard hat.
10000V	Replacement lens, with hook & pile attachment, for 75 cal/cm ² to 100 cal/cm ² PRO-HOOD®. Dual layer lens (clear and tinted). Used with the ASSLB, FBBRACKET, or BRACKET brackets.

REPLACEMENT ARC FLASH PROTECTION LENSES



REPLACEMENT BRACETS

REPLACEMENT BRACKETS

CAT. NO.	DESCRIPTION
ASCP	Replacement chin cup for AS1000 series shields.
BRACKET	Universal dielectric hard hat bracket. Used with front brim hard hats.
FBBRACKET	Universal dielectric hard hat bracket. Used with full brim hard hats.
ASSLB	Dielectric bracket, fits slotted front brim hard hats. Used with all AS1000 Series lenses.
ASRHG4	Ratcheted head gear with 4" arc guard. Used with AS1000FSR lens.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

FIRE RESISTANT HAIRNET & BEARDNET

SALISBURY'S FIRE RESISTANT HAIRNET AND BEARDNET give added protection in any industry that requires the worker to wear a hairnet or beardnet. The hairnet and beardnet have an ATPV rating of 2.4 cal/cm² and are available in gray. These items are made with washable 1.7 oz/yd² (58 g/m²) woven Nomex[®] fabric. Meets current ASTM F1506 standards.

CAT. NO.	DESCRIPTION
HN-1	Arc Rated protective hairnet, 2.4 cal/cm ² 1.7 oz/yd ² (58 g/m ²) woven Nomex [®]
BN-1	Arc Rated protective beardnet, 2.4 cal/cm ² 1.7 oz/yd ² (58 g/m ²) woven Nomex [®]



HN-1



BN-1

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

SAFETY GLASSES

SAFETY GLASSES are anti-fogging, anti-scratch and anti-static with 99.9% UV protection. These glasses meet current ANSI Z87.1, 2003 and CSA Z94.3* standards.

*The CSA Z94.3 standard applies to eye and face protectors used in all occupational and educational operations or processes involving hazards to the eyes or face.

CAT. NO.	DESCRIPTION
TS56505GRY	Clear lens, gray frame
TS56505GRYA	Amber lens, gray frame
TS56505GRYS	Smoke lens, gray frame



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION AS1000HAT & AHOOD KIT

THE AS1000HAT, AS1200HAT & AS2000HAT KITS make your Personal Protective Equipment purchasing even easier. These convenient kits contain a AS1000HAT or AS1200HAT or AS2000HAT, a 10 cal/cm² or 12 cal/cm², or 20 cal/cm² ATPV rated AFHOOD, safety glasses and an ASBAG.

The AS2000HAT has an ATPV rating of 20 cal/cm² and utilizes nanotechnology to provide a clearer, more transparent window for improved visibility. The AS1200HAT has an ATPV rating of 12cal/cm² and includes ventilation ribs that allow a natural convection air flow through the top of the face shield. The AS1000HAT has an ATPV rating of 10 cal/cm². The lens provides a 7.5" x 20" viewing area with an extra light tint.

The SKA kits are an ideal kit to use with PPE programs that exceed 8 cal/cm² or with 8 cal/cm² to 12 cal/cm². ATPV rated coveralls and coats.



PREFER A BACKPACK WITH YOUR KIT?

Make any kit a Back Pack kit, by adding suffix "-BP" to you part number or contacting your local Salisbury by Honeywell representative for more details.

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION AS1000HAT & AHOOD KIT

CAT. NO.	DESCRIPTION
SKA10	ATPV 10 cal/cm ² Kit - 10 cal/cm ² AFHOOD With 10 cal/cm ² AS1000HAT, ANSI rated safety glasses and ASBAG.
SKA12	ATPV 12 cal/cm ² Kit - 15 cal/cm ² AFHOOD With 12 cal/cm ² AS1200HAT, ANSI rated safety glasses and ASBAG.
SKA20	ATPV 20 cal/cm ² Kit - 20 cal/cm ² AFHOOD With 20 cal/cm ² AS2000HAT, ANSI rated safety glasses and ASBAG.



SKA12



SKA10

SALISBURY'S ARC FLASH RATED HOODS (Balaclava)

create 360° head and neck protection from arc flash dangers when used with a AS1000 Series Face Shield/Hard Hat/Chin Cup Unit. Each Arc Flash Hood is made from two layers of rib knit material and has an elastic face opening that maintains its shape and size.

The AFHOOD10 has an ATPV rating of 10 cal/cm². The AFHOOD15 has an ATPV rating of 15 cal/cm². The AFHOOD20 has an ATPV rating of 20 cal/cm². Both the AFHOOD28FF and the AFHOOD28EO have an ATPV rating of 28 cal/cm².

CAUTION: Arc Flash Hoods must be worn in combination with a face shield in order to comply with the requirements of NFPA 70E and will protect 360° inside the arc flash boundary.

CAT. NO.	DESCRIPTION
AFHOOD10	10 cal/cm ² Protection
AFHOOD15	15 cal/cm ² Protection
AFHOOD20	20 cal/cm ² Protection
AFHOOD28FF	28 cal/cm ² Protection
AFHOOD28EO	28 cal/cm ² Protection, 2-eye hood

ARC FLASH PROTECTION HOODS - AFHOODS



AFHOOD15



AFHOOD10



AFHOOD20



AFHOOD28EO

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

SALISBURY'S PRO-AIR™ ACAIR2000® System is designed to blow forced ambient air through a single intake hose, providing fresh oxygen to the worker and reducing the hazardous effects of shield fogging. The unit is microprocessor-controlled and operates automatically by blowing air continuously for over three hours on one charge. On the back of the unit is a button that pauses the continuous flow, if needed. Use this unit with Salisbury's PRO-HOOD® and PRO-WEAR® arc flash protection clothing.

THE PRO-AIR™ ACAIR2000® is a compact powered air system that easily mounts to most standard hardhats and functions in one light weight (less than 10 oz.), easy to use unit. The unit cools the worker and reduces fatigue while wearing a Salisbury Arc Flash PRO-HOOD®.

The PRO-AIR ACAIR2000® includes a light weight blower assembly, universal band, bendable intake hose, Ni-MH rechargeable batteries and an AC wall charger.

ARC FLASH PROTECTION HOODS COMPACT POWERED AIR SYSTEM


CAT. NO.	DESCRIPTION
ACAIR2000	PRO-AIR™ Light weight air system for PRO-HOODs



Intake hose attaches to the blower unit with a flexible joint to allow easy movement.



Use this unit with Salisbury Arc Flash Protective PRO-HOODs.

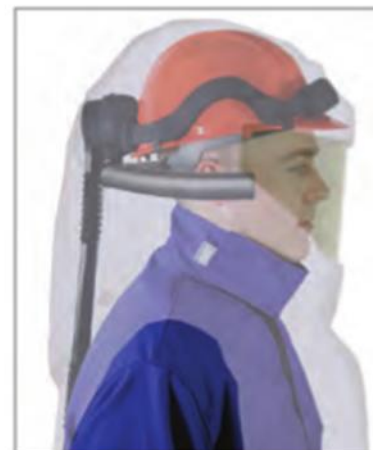

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

A REVOLUTIONARY HYBRID IN ARC FLASH PROTECTION INTRODUCING THE NEXT GENERATION IN ARC FLASH HEAD PROTECTION. Salisbury's revolutionary 40 cal/cm² Lift Front Hood combines the award winning weight balancing face shield, a transparent chin guard and the standard hood. Lift Front Hood's wider face shield and transparent chin guard more than doubles the vertical peripheral vision of the standard hood.

While offering the same level of arc flash protection, Lift Front Hood has 60% less fabric weight making the hood lighter and more comfortable. The industrial bracket design creates a natural ventilation system that allows carbon dioxide and heat to escape as it rises from the body. The removal of fabric over the hard hat without compromising worker protection mitigates trapped air that can cause fogging and heat stress.

The face shield is latched to the hood when in operation and can be raised and stowed in a weight balancing position over the hard hat when not in use. Lift Front Hood's fabric weight, breathability, visibility and lifting features make it a pioneer in the fusion of comfort and safety in arc flash protection products.

PRO-WEAR LIFT FRONT HOOD



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

PRO-WEAR LIFT FRONT HOOD



CAT NO.	DESCRIPTION
LFH40	40 cal, 2 layer, 9oz/yd ² over 9oz/yd ²
ACCESSORIES	
ASFL	Attachable Task Light (1)
AS12CLIP	Replacement Clips Set (2)
FLCLIP	Attachable Task Light Clip (1)
FLKIT	Attachable Task Light (1) & FLCLIP

IMPROVED NOW 35 LUMENS



ASFL

FLKIT



FLCLIP (1)

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

SALISBURY PRO-AIR™ AIR FLOW HOOD SYSTEM

is integrated with Salisbury's PRO-HOOD® Arc Flash Protection Hood. Now, all Salisbury PRO-HOOD® Arc Flash Protection Hoods are available with an optional integrated cooling system. This newest addition to the PRO-AIR™ line of products provides additional air flow and cools the worker. This unit is excellent in warm conditions or confined spaces. The easy to wear system is light weight, compact and easy to use. The system is designed to provide the worker with approximately 80cfm of air flow throughout the breathing zone. The unit is powered by 8 AA batteries and is designed to maintain a useful continuous life of up to 35hrs at 80cfm. The unit is non-filtered and is not considered a respirator.

CAT. NO.	DESCRIPTION
FH8BL-C	8 cal/cm ² Arc flash hood w/ air system
FH11BL-C	12 cal/cm ² Arc flash hood w/ air system
FH20BL-C	20 cal/cm ² Arc flash hood w/ air system
FH31RB-C	31 cal/cm ² Arc flash hood w/ air system
FH40GY-C	40 cal/cm ² Arc flash hood w/ air system
LFH40	NEW 40 cal/cm ² Arc flash lift front hood (pg.17)
FH40PLT-C	NEW 40 cal/cm ² , Arc flash hood w/ air system
FH55GY-C	55 cal/cm ² Arc flash hood w/ air system
FH75GY-C	75 cal/cm ² Arc flash hood w/ air system
FH100TW-C	100 cal/cm ² Arc flash hood w/ air system

AIR FLOW HOOD SYSTEM & COMPACT PRO-AIR



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

THE SALISBURY PRO-AIR™ is a belt mounted COMPACT POWERED AIR SYSTEM that provides a continuous flow of filtered air to reduce worker fatigue and provide additional comfort when working in hot and humid conditions. The PRO-AIR™ integrates with the full ATPV range of Salisbury's PRO-HOOD® line and easily attaches inside the hood using the exclusive Salisbury hook and pile looped fastener system.

The PRO-AIR™ kit consists of a blower unit, belt and comfort pad, rechargeable battery pack, breathing hose and battery charger. Blower unit and hose are covered with a fire resistant material to meet NFPA 70E requirements. The PRO-AIR™ kit is shipped in a durable carrying case.

Not NIOSH approved.

CAT. NO.	DESCRIPTION
ACAIR102	PRO-AIR Compact Powered Air System, complete kit
AC103	PRO-AIR battery
A168091	Replacement air filter cartridges
AC124	O-Rings for air filters
AC129	Y- shaped breathing hose
AC129FR	Fire retardent tube covers for AC129 (3)
AC131	Single unit battery charger
AC135	Compact Powered Air System carrying case

AIR FLOW HOOD SYSTEM & COMPACT PRO-AIR



ACAIR102
Back View



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007



KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

PRO-HOOD® ARC FLASH PROTECTION HOODS

- 8 cal/cm² to 100 cal/cm²* ATPV ratings
- 8 cal/cm² to 75 cal/cm²* Hoods are made from arc flash resistant material
- 100 cal/cm²* Hood is made from TuffWeld® and Q/9® material layers
- Sewn with Nomex® thread
- Arc rated 10" x 20" anti-fogging replaceable lens
- Slotted bracket
- Hook and pile tabs to attach Salisbury's PRO-AIR™ belt mounted compact air system
- One size fits all
- Meet current ASTM F2178 and NFPA 70E standards and the flammability requirements for ASTM F1506

ARC FLASH PROTECTION HOOD



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION HOOD

CAT. NO.	DESCRIPTION
FH8BL	8 cal/cm ² , Navy blue
FH11BL	12 cal/cm ² , Navy blue
FH20BL	20 cal/cm ² , Navy blue
FH31RB	31 cal/cm ² , Royal blue
FH40GY	40 cal/cm ² , Gray
LFH40	NEW 40 cal/cm ² Arc flash lift front hood (pg.17)
FH40PLT	NEW 40 cal/cm ² , Premium Light Weight, Green
FH55GY*	55 cal/cm ² , Gray
FH75GY*	75 cal/cm ² , Gray
FH100TW*	100 cal/cm ² , Khaki, TuffWeld®

Add suffix "-C" to include integrated air flow hood system.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION COATS

- 8 cal/cm² to 100 cal/cm²* ATPV ratings
- 8 cal/cm² to 75 cal/cm²* coats are made from arc flash resistant material
- 100 cal/cm²* coat is made from TuffWeld® and Q/9® material layers
- Sewn with Nomex® thread
- 32" Long
- Nomex® wristlets
- Expansion back for added comfort
- Dual stage front closure with high temperature plastic zipper on the
- 31 - 100 cal/cm²* coats
- Arc Rated hook & pile storm flap
- Coats are intended to be used with PRO-HOODS
- Meets current ASTM F1506 and NFPA 70E standards
- NOTE:** Garments that have received CE 1020 certification will be marked accordingly.
- Sizes S, M, L, XL, 2XL and 3XL available from stock

PRO-WEAR FLASH PROTECTION SUIT



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

CAT. NO.	DESCRIPTION
ACC832BL	8 cal/cm ² , Navy blue
ACC1132BL	12 cal/cm ² , Navy blue
ACC2032BL	20 cal/cm ² , Navy blue
ACC3132RB	31 cal/cm ² , Royal blue
ACC4032GY	40 cal/cm ² , Gray
ACC4032PLT	40 cal/cm ² , Premium Light Weight, Green
ACC5532GY*	55 cal/cm ² , Gray
ACC7532GY*	75 cal/cm ² , Gray
ACC10032TW*	100 cal/cm ² , Khaki, TuffWeld®

PRO-WEAR FLASH PROTECTION SUIT



EXCLUSIVE FEATURE

Dual stage front closure with high temperature plastic zipper and arc rated hook & pile storm flap on 31-100 cal/cm² coat designs.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION BIB OVERALLS

- 8 cal/cm² to 100 cal/cm²* ATPV ratings
- 8 cal/cm² to 75 cal/cm²* Bib overalls are made from arc flash resistant material
- 100 cal/cm²* bib overalls are made from TuffWeld® and Q/9® Material layers
- Sewn with Nomex® thread
- Integrated heavy duty suspenders
- Relaxed cut for greater mobility
- 30" inseam
- Adjustable hook and pile waist straps
- Bib front for added protection
- Adjustable gussets on pant cuffs
- Meets current ASTM F1506 and NFPA 70E standards
- NOTE:** Garments that have received CE 1020 certification will be marked accordingly.
- Sizes S, M, L, XL, 2XL and 3XL available from stock
- NOTE:** Other sizes and orange color available by special order, contact Salisbury customer service for details.

FLASH PROTECTION BIB OVERALLS



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

CAT. NO.	DESCRIPTION
ACB830BL	8 cal/cm ² , Navy blue
ACB1130BL	12 cal/cm ² , Navy blue
ACB2030BL	20 cal/cm ² , Navy blue
ACB3130RB	31 cal/cm ² , Royal blue
ACB4030GY	40 cal/cm ² , Gray
ACB4030PLT	40 cal/cm ² , Premium Light Weight, Green
ACB5530GY*	55 cal/cm ² , Gray
ACB7530GY*	75 cal/cm ² , Gray
ACB10030TW*	100 cal/cm ² , Khaki, TuffWeld®

NOTE: Add suffix for desired size: S, M, L, XL, 2XL, or 3XL

FLASH PROTECTION BIB OVERALLS

ACB10030TW



ACB4030PLT



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION COVERALLS

- 8 cal/cm² to 20 cal/cm² ATPV ratings
- Made from arc flash resistant material
- Sewn with Nomex[®] thread
- Full cut with set in sleeves
- Arc rated hook and pile front closure
- 30" Inseam
- Expansion back
- 2-Ply Nomex[®] wristlets
- Hook and pile cuff opening
- Meet current ASTM F1506 and NFPA 70E standards.

NOTE: Garments that have received CE 1020 certification will be marked accordingly.

Sizes S, M, L, XL, 2XL and 3XL available from stock

CAT. NO.	DESCRIPTION
ACCA8BL	8 cal/cm ² , Navy blue
ACCA11BL	12 cal/cm ² , Navy blue
ACCA20BL	20 cal/cm ² , Navy blue

ARC FLASH PROTECTION PREMIUM COVERALLS

ACCA11BL



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION OVERPANTS

Overpants have full elastic waistband with arc rated hook and pile front closure
 30" Inseam
 Overpants have hook and pile cuff adjustment

SALISBURY EXCLUSIVE

The Salisbury overpants provide a quick and cost-effective way to maximize protection. Loose design and flared legs make it easy to put on and take off over existing work clothing.

CAT. NO.	DESCRIPTION
ACP830BL	8 cal/cm ² , Overpants, Navy blue
ACP1130BL	12 cal/cm ² , Overpants, Navy blue*
ACP2030BL	20 cal/cm ² , Overpants, Navy blue*

ARC FLASH PROTECTION PREMIUM OVERPANTS

ACP830BL



Elastic waistband for maximum comfort.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION PREMIUM COAT & PANT KITS

ARC FLASH SAFETY PROTECTIVE EQUIPMENT 8 & 12 CAL/CM² KITS - Salisbury's line of Pro-Wear[®] arc flash protective apparel has expanded to include HRC2 Coat and Pant Kits. These new kits provide everything needed for eye, face, head and body protection and are available in several configurations to make ordering easier and more convenient.

As with all products that carry the Salisbury by Honeywell Pro-Wear[®] name, the HRC2 Coat and Pant Kits are made from industry leading materials. The HRC2 Coat and Pant Kits contain premium grade garments that offer increased breathability and comfort. The face shields are made utilizing nanotechnology which produces a clearer, more transparent window, thus improving user visibility. Additionally, the ventilation ribs featured on the face shield unit allow a natural convection air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort for the user.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION PREMIUM COAT & PANT KITS

CAT NO.	DESCRIPTION
8 CAL/CM² COAT AND PANT KITS	
SKC8	ACC832BL, SKBAG, AS1000HAT, AFHOOD10, safety glasses and ASBAG
SKCP8	ACC832BL, ACP830BL, SKBAG, AS1000HAT, AFHOOD10, safety glasses and ASBAG
SKC8-1200	ACC832BL, SKBAG, AS1200HAT, AFHOOD20, safety glasses and ASBAG
SKCP8-1200	ACC832BL, ACP830BL, SKBAG, AS1200HAT, AFHOOD20, safety glasses and ASBAG
SKC8-BP	ACC832BL, AS1000HAT, AFHOOD10, safety glasses, ASBAG and SKBACKPACK
SKCP8-BP	ACC832BL, ACP830BL, AS1000HAT, AFHOOD10, safety glasses, ASBAG and SKBACKPACK
SKC8-BP-1200	ACC832BL, AS1200HAT, AFHOOD20, safety glasses, ASBAG and SKBACKPACK
SKCP8-BP-1200	ACC832BL, ACP830BL, AS1200HAT, AFHOOD20, safety glasses, ASBAG and SKBACKPACK
12 CAL/CM² COAT AND PANT KITS	
SKC11	ACC1132BL, SKBAG, AS1000HAT, AFHOOD10, safety glasses and ASBAG
SKCP11	ACC1132BL, ACP1130BL, SKBAG, AS1000HAT, AFHOOD10, safety glasses and ASBAG
SKC11-1200	ACC1132BL, SKBAG, AS1200HAT, AFHOOD20, safety glasses and ASBAG
SKCP11-1200	ACC1132BL, ACP1130BL, SKBAG, AS1200HAT, AFHOOD20, safety glasses and ASBAG
SKC11-BP	ACC1132BL, AS1000HAT, AFHOOD10, safety glasses, ASBAG and SKBACKPACK
SKCP11-BP	ACC1132BL, ACP1130BL, AS1000HAT, AFHOOD10, safety glasses, ASBAG and SKBACKPACK
SKC11-BP-1200	ACC1132BL, AS1200HAT, AFHOOD20, safety glasses, ASBAG and SKBACKPACK
SKCP11-BP-1200	ACC1132BL, ACP1130BL, AS1200HAT, AFHOOD20, safety glasses, ASBAG and SKBACKPACK

NOTE: Add suffix for desired size: S, M, L, XL, 2XL or 3XL

NOTE: Add suffix -CLR to replace the AS1200HAT for a AS1200HAT with transparent chin guard (AS1200HAT-CLR).



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION PREMIUM COVERALL KITS

SALISBURY PRO-WEAR® ARC FLASH PROTECTION COVERALL KITS are clothing kits containing arc flash coveralls in an ATPV rating of either 8 cal/cm² or 12 cal/cm², an AS1000HAT, an appropriate ATPV rated AFHOOD, ASBAG, SKBAG and safety glasses.

Sizes S, M, L, XL, 2XL and 3XL available from stock



ADD THE NEW AS1200HAT AND A BACKPACK!

Add suffix "-BP" to replace the SKBAG Large Storage Bag with a SKBACKPACK Specialty Reinforced Back Pack. Add suffix "-1200" to replace AS1000HAT w/ AS1200HAT.

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH PROTECTION PREMIUM COVERALL KITS

PRODUCT NUMBERING CHART FOR PPE KITS W/ COVERALLS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	HRC	Description
SKCA8	S, M, L, XL, 2XL or 3XL	8	2	Navy
SKCA11	S, M, L, XL, 2XL or 3XL	10	2	Navy
Example: SKCA8L	L	8	2	Navy

Add suffix "-1200" to replace AS1000HAT w/ AS1200HAT.

SKCA8L is a large clothing kit containing a coveralls in an ATPV rating of 8 cal/cm², AS1000HAT, AFHOOD, storage bags and safety glasses.



KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

PERSONAL PROTECTION EQUIPMENT KITS

SALISBURY PRO-WEAR® ARC FLASH PERSONAL PROTECTIVE EQUIPMENT KITS AVAILABLE IN ATPV RATINGS OF 8, 12 AND 20 CAL/CM². These kits contain arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses.

2-COLOR 8 CAL/CM² AND 12 CAL/CM² PRO-WEAR ARC FLASH PROTECTION PPE KITS AVAILABLE.

Sizes S, M, L, XL, 2XL and 3XL available from stock. Other sizes and orange color available by special order.

These kits meet NFPA 70E Hazard Risk Category 2.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

PERSONAL PROTECTION EQUIPMENT KITS

PRODUCT NUMBERING CHART FOR 8 CAL/CM² TO 20 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	HRC	Description
SK8	S, M, L, XL, 2XL or 3XL	8	2	Navy
SK11	S, M, L, XL, 2XL or 3XL	12	2	Navy
SK20	S, M, L, XL, 2XL or 3XL	20	2	Navy
Example: SK8M	M	8	2	Navy

SK8M is a medium clothing kit with a rating of 8 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.



SALISBURY PRO-WEAR® ARC FLASH PERSONAL PROTECTION EQUIPMENT KITS ARE AVAILABLE IN AN ATPV RATING OF 31 CAL/CM². This kit contains an arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses.

Sizes S, M, L, XL, 2XL and 3XL available from stock. Other sizes and orange color available by special order.

This kit meets NFPA 70E Hazard Risk Category 3.

PRODUCT NUMBERING CHART FOR 31 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	HRC
SK31	S, M, L, XL, 2XL or 3XL	31	3
Example: SK31S	S	31	3

SK31S is a small clothing kit with a rating of 31 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.

PERSONAL PROTECTION EQUIPMENT KITS



PREFER A BACKPACK WITH YOUR KIT?

Make any kit a Back Pack kit, by adding suffix "-BP" to you part number or contacting your local Salisbury by Honeywell representative for more details.

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

PREMIUM LIGHT WEIGHT

**SALISBURY PREMIUM LIGHT WEIGHT PRO-WEAR®
 ARC FLASH PERSONAL PROTECTION EQUIPMENT -**

Salisbury by Honeywell's NEW Premium Light Weight 40 cal/cm² Arc Flash Protection Suit has a total fabric weight of 11 oz/yd² as compared to the standard 40 calorie garment with a fabric weight of 18 oz/yd². This material is the lightest available and meets all the necessary standards to keep you safe from arc flash. Keep cooler and improve worker comfort without compromising safety. Better products means better work performance. Trust Salisbury to always provide the best possible products available.

Complies with NFPA 70E HRC4

Meets ASTM F1506-02A, ASTM F1959M/F1959M-99

Made from synthetic fiber blend

Arc rated for the life of the garment

Available individually (coat, hood, overalls) or in kits

Heat attenuation factor of 93.20% (meaning the garment is not only flame resistant, but it resists 93.2% of the heat experienced in an Arc Flash).



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

THE SALISBURY ADVANTAGE

- 11 oz/yd² total fabric weight - **LIGHTEST IN THE INDUSTRY**
- Added ease of movement
- Keeps user cooler longer
- PRO-HOOD® includes the most transparent lens available
- Integrated cooling system available for PRO-HOOD®
- Longer coat creates better body coverage while working overhead
- Adjustable gussets on overall cuffs

PRO-WEAR PREMIUM LIGHT WEIGHT



SK40PLT

CAT. NO.	DESCRIPTION	SIZES
FH40PLT	40 cal/cm ² , Hood, Premium Light Weight	S, M, L, XL, 2XL or 3XL**
ACC4032PLT	40 cal/cm ² , Coat, Premium Light Weight	S, M, L, XL, 2XL or 3XL*
ACB4030PLT	40 cal/cm ² , Overall, Premium Light Weight	S, M, L, XL, 2XL or 3XL*
SK40PLT	40 cal/cm ² , Kit, Premium Light Weight	S, M, L, XL, 2XL or 3XL*
FH40PLT-C	40 cal/cm ² , Hood w/ cooling, Premium Light Weight	S, M, L, XL, 2XL or 3XL*
SK40PLT-C	40 cal/cm ² , Kit w/ cooling, Premium Light Weight	S, M, L, XL, 2XL or 3XL*



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

SALISBURY PRO-WEAR® ARC FLASH PERSONAL PROTECTION EQUIPMENT KITS AVAILABLE IN ATPV RATING OF 40 CAL/CM². This kit contains an arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses.

2-COLOR PRO-WEAR® ARC FLASH PROTECTION PPE KITS AVAILABLE.
 Sizes S, M, L, XL, 2XL and 3XL available from stock. Other sizes and orange color available by special order.

These kits meet NFPA 70E Hazard Risk Category 4

PRODUCT NUMBERING CHART FOR 40 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	HRC	Description
SK40	S, M, L, XL, 2XL or 3XL	40	4	Gray kit
SK40PLT	S, M, L, XL, 2XL or 3XL	40	4	Premium Light Weight
Example:				
SK402XL	2XL	40	4	Gray Kit

SK402XL is an extra extra large clothing kit with a rating of 40 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.

PRO-WEAR PERSONAL PROTECTION EQUIPMENTS KIT



KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

PRO-WEAR PERSONAL PROTECTION EQUIPMENTS KIT

SALISBURY PRO-WEAR® ARC FLASH PERSONAL PROTECTION EQUIPMENT KITS AVAILABLE IN ATPV RATING OF 55 AND 75 CAL/CM²*. These kits contains an arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses.

Sizes S, M, L, XL, 2XL and 3XL available from stock. Other sizes and orange color available by special order.

These kits meet NFPA 70E Hazard Risk Category 4.

PRODUCT NUMBERING CHART FOR 55 CAL/CM² & 75 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	HRC
SK55*	S, M, L, XL, 2XL or 3XL	55	4
SK75*	S, M, L, XL, 2XL or 3XL	75	4
Example: SK55XL	XL	55	4

SK552XL is an extra large clothing kit with a rating of 55 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.



SALISBURY PRO-WEAR® ARC PERSONAL PROTECTION EQUIPMENT KITS ARE AVAILABLE IN AN ATPV AN RATING OF 100 CAL/CM²*. This kit contains an arc flash coat, bib overalls, PRO-HOOD®, hard hat, SKBAG and safety glasses. Made from TUFFWELD® which offers inherent arc rated protection with a high level of comfort and durability. Exceptional light weight comfort with superb wicking so you can stay cooler and drier even under demanding conditions.

Sizes S, M, L, XL, 2XL and 3XL available from stock. Other sizes and orange color available by special order.

This kits meet NFPA 70E Hazard Risk Category 4.

PRODUCT NUMBERING CHART FOR 100 CAL/CM² PPE KITS

Salisbury Cat. No.	Size of Garments (choose one below)	ATPV Rating cal/cm ²	HRC
SK100*	S, M, L, XL, 2XL or 3XL	100	4
Example: SK100L	L	100	4

SK1002XL is an arge clothing kit with a rating of 100 cal/cm² that contains a coat, bib overalls, PRO-HOOD®, hard hat, safety glasses and storage bag.

PRO-WEAR PERSONAL PROTECTION EQUIPMENTS KIT



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH & FRAME RESISTANT HI-VIS VEST & RAIN SUITS

SALISBURY'S ARC & FLAME RESISTANT PVC NOMEX® RAIN SUIT meets all requirements for arc flash protection rain wear standard ASTM F 1891. The orange suits have an ATPV rating of 9 cal/cm². The yellow suits have an ATPV rating of 7 cal/cm². The jacket includes a collar hood, back vent with D-Ring opening, zipper front, two patch pockets with hook and pile flaps and 3M™ Scotchlite™ reflective trim. The pants include a snap fly front, deluxe suspenders system with quick release hardware and slide adjusters, hook and pile cuff adjusters and 3M™ Scotchlite™ reflective trim. The jackets and pants are available in either florescent yellow or florescent orange. PVC Nomex® Rain Suit meets Class 3 ANSI/ISEA 107-2010 standards.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ARC FLASH & FRAME RESISTANT HI-VIS VEST & RAIN SUITS

SALISBURY'S HI-VIS VEST has an ATPV rating of 5 cal/cm² and is constructed from a flame retardant mesh fabric and provides cool comfort. The vest's fabric has a 40 Xenon Rating, which is the highest visibility available. No other fabric beats it! The vest is available in hi-vis orange or hi-vis yellow. A 2" silver flame resistant 3M™ Scotchlite™ reflective material trim is sewn over each shoulder and around the entire garment. The vest is available in Class 2 ANSI standard compliant or CSA standard compliant. Meets ASTM F1506 and ANSI/SEA 107-2010 standards.



CAT. NO.	DESCRIPTION	SIZES
NRJ-0	Orange, PVC Nomex Rain Jacket, 9 cal/cm2	S, M, L, XL, 2XL or 3XL**
NRP-0	Orange, PVC Nomex Rain Pants, 9 cal/cm2	S, M, L, XL, 2XL or 3XL**
NRJ-Y	Yellow, PVC Nomex Rain Jacket, 7 cal/cm2	S, M, L, XL, 2XL or 3XL**
NRP-Y	Yellow, PVC Nomex Rain Pants, 7 cal/cm2	S, M, L, XL, 2XL or 3XL**
HVVCA-Y	Yellow, Hi-Vis Mesh Vest, 5 cal/cm2, Canada	S, M, L, XL, 2XL or 3XL
HVVUS-Y	Yellow, Hi-Vis Mesh Vest, 5 cal/cm2, USA	S, M, L, XL, 2XL or 3XL
HVVCA-0	Orange, Hi-Vis Mesh Vest, 5 cal/cm2, Canada	S, M, L, XL, 2XL or 3XL
HVVUS-0	Orange, Hi-Vis Mesh Vest, 5 cal/cm2, USA	S, M, L, XL, 2XL or 3XL

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

WORK GLOVES

THE NEXT-GENERATION OF PERFORMANCE WORK GLOVES.

These high quality performance work gloves are constructed of a synthetic and natural material blend. These gloves are highly durable and comfortably form-fit to the hand without inhibiting dexterity.

EXTENSIVE REINFORCEMENT: Salisbury by Honeywell work gloves have extensive palm and finger coverage. The PVC based asphalt reinforcement material is tacky, making the gloves more dexterous, durable and provides a secure grip even in wet conditions.

CUFF: Some of these gloves feature a FlexMesh™ cuff which is a protective, breathable and comfortable cuff closing system that does not require constant adjusting.

THUMB CUT: The unique 3-D palm construction design prevents bunching between the thumb and index finger.

STREAMLINED KNUCKLE PROTECTION: The knuckle protection on the back of the hand is internalized and will NOT get "caught up" when reaching into a tool pouch or pocket.

DURABLE SYNTHETIC LEATHER ON BASE OF PALM: The base layer is synthetic suede called SupraTex™. This material is highly breathable and durable. The material wicks away heat and moisture which prevents sweat and heat from building up.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

WORK GLOVES



UWG-GPU

UWG-GPU - UTILITY PLUS GLOVE - ABRASION RESISTANT - ALL PURPOSE

This glove features asphalt reinforcement on the palm to resist abrasion. The top of the hand is made out of a stretchable, light weight and breathable reinforced nylon for comfort. The glove also features internal knuckle protection.



UWG-WPSC

UWG-WPSC - WATERPROOF PRO UTILITY GLOVE - WINTER - ALL PURPOSE

This all purpose waterproof/breathable work glove is designed for cooler weather. It features stretch nylon on the top of the hand and an extended FlexMesh™ cuff. The inner liner is made with a warm microfleece. The glove is entirely waterproof, windproof and breathable. The palm features a SupraTex™ base layer with a durable asphalt palm reinforcement.



UWG-WPGC

UWG-WPGC - WATERPROOF WINTER UTILITY GLOVE - GAUNTLET STYLE

This work glove is a warm and durable glove. This glove is 100% waterproof, windproof and breathable. It features a Sportwool™ liner that allows the hand to remain comfortable for long periods of time in extreme weather conditions. 3M Thinsulate™ Insulation lines the top of the hand, fingers and cuff.



UWG-KLG

UWG-KLG - KEVLAR® UTILITY GLOVE - CUT RESISTANT - ALL PURPOSE

This all purpose work glove is highly cut-resistant and features a 100% KEVLAR® lining. This glove has great dexterity and durability.

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

WORK GLOVES

UWG-HUXT



UWG-HUXT - PRO UTILITY GLOVE - MAX ABRASION RESISTANT - ALL PURPOSE

This all purpose work glove has maximum abrasion resistance, good dexterity and breathability. The top of the hand features stretch nylon and the extended cuff includes asphalt reinforcement on the palm side.

All gloves are available in sizes S-2XL.

CAT. NO.	DESCRIPTION
UWG-GPU	Utility plus glove - abrasion resistant - all purpose
UWG-KLG	KEVLAR utility glove - cut resistant - all purpose
UWG-WPSC	Waterproof pro utility glove - winter - all purpose
UWG-HUXT	Pro utility glove - max abrasion resistant - all Purpose
UWG-WPGC	Waterproof winter utility glove - gauntlet style

Add suffix: "/S" for Small, "/M" for Medium, "/L" for Large, "/XL" for Extra Large, or "/2XL" for 2XLarge.



WORK GLOVES

EVERYTHING YOU NEED IN ONE CONVENIENT LIGHT WEIGHT BACKPACK.

The **Salisbury SK BACKPACK** is specifically designed to hold virtually everything from tools to full Personal Protective Equipment (PPE) kits. Specialized reinforced compartments with flap closures are located on both sides of the pack and include flexible slots designed specifically to keep your hand tools in place. The individual compartments make finding the right tool a snap. The backpack can even be personalized to hold your very own PPE kit - clothing, head and face protection, insulated tool kit and much more. The interior includes extra large compartments to hold voltage detectors or other specialized tools, as well as numerous, smaller partitions and a specific area for first aid items.

The rugged **SK BACKPACK** is manufactured from water resistant, reinforced fabric. The SK BACKPACK is resistant to cuts and abrasion. The adjustable, heavy duty straps are wide and padded making it very comfortable to wear regardless of the load. The SK BACKPACK includes an exterior hard hat strap, D-rings and universal snap hook. It even includes a built-in integrated handle for those on the move.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

SALISBURY'S HEAVY DUTY TOOL BAG HELPS KEEP ALL YOUR SAFETY NEEDS ORGANIZED AND IN ONE PLACE. The **Salisbury TOOL BAG** is designed to easily transport and organize numerous hand tools and specialized equipment. Finding the right tool becomes effortless because of the many unique compartments. Large, reinforced pockets are located throughout the interior of the bag. Outside there are nine individual pouches, including three expandable mesh compartments with "D"-ring clips. Great for carrying anything from water bottles to additional tools.

The **SKTLBAG** has a black sleek design and is manufactured from heavy duty water resistant fabric. The tool bag is slash and cut resistant. The bag opening is large and reinforced with metal framing. Non-locking hinges allow for easy access and visual searching. The adjustable shoulder strap and durable carrying handle makes toting this light weight (3.5 pounds) bag from job to job trouble-free. **LARGE STORAGE BAG** for storing Salisbury PRO-WEAR® Arc Flash Clothing, gloves and other accessories. Comes standard in most PRO-WEAR kits. Bag is 24" long x 15" high x 12" deep.

CAT. NO.	DESCRIPTION
SKBACKPACK	Reinforced specialty backpack (14"L x 8"W x 18"H)
SKTLBAG	Rugged bag for tool and equipment storage (19"L x 12"W x 14"H)
SKBAG	Large storage bag (24"L x 12"W x 15"H)

SKTLBAG



SKBAG



WORK GLOVES



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

MOLDED SLEEVES are manufactured by either injection or compression molding methods. The advantage these methods offer is the ability to produce sleeves of Type I or SALCOR® Type II synthetic rubber. SALCOR® sleeves provide the same high quality and electrical protection as natural rubber, with the added benefit of being resistant to ozone and ultraviolet radiation. Type I sleeves are available in black, yellow or maroon. Type II SALCOR® sleeves are black or orange. Molded sleeves are available in curved arm style only.

PROPER STORAGE EXTENDS THE SERVICE LIFE OF MOLDED SLEEVES. Folds and creases strain rubber and cause it to crack from ozone prematurely. By storing rubber sleeves in the right size bag, and never forcing more than one pair into each bag, equipment will lie flat and extend the life of the product. Salisbury bags are constructed of heavy duty canvas duck and are double stitched and riveted at stress points for extra durability. Canvas bags feature a D ring for hanging in trucks or on work belts. Bags feature tapered gussets with wide opening tops for easy insertion.

SLEEVE BUTTONS, STRAPS AND HARNESSES are required to wear rubber insulating sleeves properly. Four buttons are required per pair of sleeves. Two straps are required per pair of sleeves. One harness is required per pair of sleeves.

LOW VOLTAGE MOLDED SLEEVES & ACCESSORIES

Black Type I 2RB



Yellow Type I 3LY



Orange Type II 2ROS



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

LOW VOLTAGE MOLDED SLEEVES & ACCESSORIES

CAT. NO. BREAKDOWN FOR MOLDED TYPE I SLEEVES

VOLTAGE CLASS	SIZE	COLOR
1	R or L	Y
2	R, L or XL	B, Y, M
3	R or L	Y, M
4	R or L	M

R=Regular L=Large XL=Extra Large B=Black Y=Yellow
 Example: 2LB M=Maroon

CAT. NO. BREAKDOWN FOR MOLDED TYPE II SLEEVES

VOLTAGE CLASS	SIZE	COLOR
1	R or L	BS or OS
2	R, L or XL	BS or OS

R=Regular L=Large XL=Extra Large BS=Black SALCOR
 Example: 2LOS OS=Orange SALCOR



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

LOW VOLTAGE MOLDED SLEEVES & ACCESSORIES

CAT. NO.	FOR SLEEVE LENGTH in. (mm)	DIMENSIONS inches (mm)	WEIGHT EA. lbs. (kgs)
CANVAS SLEEVE BAG			
T31	—	30" x 9.5" (762 x 241mm)	1.5 (.7)
T32	—	30" x 13" (762 x 330 mm)	3 (1.4)
BUTTONS			
B2	—	One Piece Sleeve Button	.2 (.01)
B22	—	4 Screw Type Buttons	.8 (.04)
STRAPS			
S1	15"(381mm)	Strap w/ 4 B2 Buttons	.1 (.005)
HARNESS			
H1		Harness w/ 4 B2 Buttons	1 (.45)



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

INSULATED RUBBER GLOVES

SALISBURY INSULATING RUBBER GLOVES are available in sizes 7 through 12, including some half sizes. Proper fit is important to minimize chafing and fatigue. To determine glove size, measure the circumference around the palm. Allow for additional room if fabric glove liners are to be worn, especially with thermal liners.

Class 00 are available in red and black, Type I Natural Rubber or blue and contrasting blue/orange Type II Salcor® ozone resistant rubber. Class 0 gloves are available in red, yellow and black, Type I Natural Rubber or blue Type II Salcor® ozone resistant rubber. The contrast between the thin outer orange color against the inner blue color makes inspecting for cuts and tears easier when the glove is inflated or stretched.

Class 2 gloves are available in Type I Natural Rubber only. All insulating rubber gloves are extremely flexible and make working with small parts easy. The gloves meet or exceed ASTM D120 and IEC EN60903 Standards.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

INSULATED RUBBER GLOVES

CLASS	LENGTH	COLOR	SIZE (choose one below)
E 00	11 or 14	R, BL, B, Y or BLO	7, 8, 8H, 9, 9H
E 0	11 or 14	R, BL, B, Y or BLO	
E 1	14,16 or 18	B, YB or RB	10, 10H, 11, 12
E 2	14,16 or 18	B, YB or RB	

Class 3 and Class 4 Available.

EXAMPLE: E011R10 is a Class 0 11" red glove size 10.

Type I Natural Rubber available in: R=Red, Y=Yellow, B=Black, RB=Red in, Black out, YB=Yellow in, Black out.

Type II Salcor® Rubber available in: BL=Blue, BLO=Blue in, Orange out.

INSULATING RUBBER GLOVES MAXIMUM USAGE

CLASS	PROOF TEST VOLTAGE AC / DC	MAX. USE VOLTAGE AC / DC
00	2500 / 10,000	500 / 750
0	5,000 / 20,000	1,000 / 1,500
1	10,000 / 40,000	7,500 / 11,250
2	20,000 / 50,000	17,000 / 25,500
3	30,000 / 60,000	26,500 / 39,750
4	40,000 / 70,000	36,000 / 54,000

INSULATED RUBBER GLOVES



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

GLOVE DUST



TEN-FOUR® GLOVE DUST is a cooling, frictionless powder that absorbs moisture and perspiration when wearing rubber gloves. The 5-oz. bottle easily fits in a pocket or glove bag. The 4-quart bulk package is used in test labs as a dusting powder.

TEN-FOUR® GLOVE DUST

CAT. NO.	DESCRIPTION	WEIGHT lbs. (kgs)
10-4	12, 5 oz. Squeeze bottles	5.5 (12)
10-4-4QT	4 qt. Bulk, single	8 (19)

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

LEATHER PROTECTOR GLOVES should always be worn over insulating rubber gloves to provide the needed mechanical protection against cuts, abrasions and punctures. The ILP Series is manufactured from top grain cowhide or goatskin. Cowhide cuffs are tough leather on palm side and orange vinyl on the back, while the goatskin cuffs are green leather on palm side and orange vinyl on back. The ILP10 gloves do not have a cuff. Full complement of styles from low-volt through 16" contour cuff. Leather protector gloves come in dual sizes 7/7.5 through 11/11.5 and 12. Protectors for Class 00 and 0 are available with non-metallic buckle and pull strap or elastic wrist.

It is the responsibility of the purchaser to specify the overall length of the protector gloves. The Clearance Table shows the minimum distance which shall be allowed between the top of the protector glove cuff and the top end of the bead of the rubber glove per ASTM F496 Specifications.

LEATHER PROTECTOR CLEARANCE TABLE

GLOVE CLASS	MIN. DISTANCE BETWEEN TOP OF PROTECTORS AND RUBBER GLOVES	
	in.	mm
00, 0	1/2	13
2	2	51

LEATHER PROTECTORS & GLOVE LINERS



CAT. NO.		OAL LENGTH in. (mm)	WEIGHT lbs. (kgs)
Cowhide	Goatskin		
ILP3S	ILPG3S	12 (305)	1 (.5)
ILP5S	ILPG5S	14 (356)	1.2 (.5)
ILP7C	ILPG7C	16 (406)	1.5 (.7)
ILP10	ILPG10	10 (254)	.7 (.32)
ILP10A	ILPG10A	10 (254)	.7 (.32)

S=straight cuff, C=contour cuff, A=w/ pull strap.
 Sizes: 7/7.5, 8/8.5, 9/9.5, 10/10.5, 11/11.5, 12

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

LINER GLOVES reduce the discomfort of wearing Insulating Rubber Gloves in all seasons. For year round use, liners provide warmth in cold weather while they absorb perspiration in the warm months. Many styles and fabrics are available with either a open or knit wrist.

The knit wrist style grips the wrist rather than allowing the cuff to roll down and bunch at the palm. All Liner Gloves are for year round use with Insulating Rubber Gloves and Mittens. All liners are made from stretch fabric that can fit any hand size.

The L Series has a tough outer cotton fabric while the inner lining is soft and comfortable. The LMKC Series is light, airy and allows ease of movement. The LMKW Series is made from a fabric that moves easily yet gives a substantial layer of lining.

CAT. NO.	DESCRIPTION	WRIST Style	LENGTH in. (mm)	WEIGHT EA. lbs. (kgs)
L10JK	Jersey style, light weight, seams out	Knit	10 (254)	.14 (.06)
L12J	Jersey style, light weight, seams out	Open	12 (305)	.14 (.06)
L10MKW	Machine knit, cotton/wool blend	Knit	10 (254)	.14 (.06)

One size fits all.

LINER GLOVES
L10MKW





GLOVE KITS - Salisbury's insulating rubber gloves are necessary for every electrical worker's complete safety. Salisbury's leather protectors provide needed protection from cuts, abrasions and punctures. To keep these safety items in top condition, proper storage is very important.

Proper storage extends the service life of gloves. Folds and creases strain natural rubber and cause it to cut from ozone prematurely. Storing rubber gloves in the right size bag and never forcing more than one pair into each bag, equipment will lie flat and last longer.

PRODUCT NUMBERING CHART FOR GLOVE KITS

CLASS	LENGTH (Inches)	COLOR	GLOVE SIZE (choose one below)
GK 00	11 or 14	B, BL, Y, R	7, 8, 8H, 9, 9H
GK 0	11 or 14	B, BL, Y, R	
GK 2	14, 16, or 18	B, RB	10, 10H, 11, 12
Example: GK011BL9	11	BL	9

GK011BL9 is a glove kit with a Blue Class 0 glove 11" long size 9. The appropriate glove bag and leather protectors will be included.

Type I Natural Rubber available in: R=Red, Y=Yellow, B=Black

RB=Red in, Black out.

Type II Salcor® Rubber available in: BL=Blue

INSULATING GLOVES & PROTECTORS KITS



SALISBURY PRO-WEAR® ARC FLASH GLOVES are available in ATPV ratings of 12 to 100 cal/cm²*. These gloves are sewn with Nomex® thread. All gloves are made with arc rated material.

All Arc Flash Gloves are 14" long and designed in a cleft cut style. One size fits most.

CAT. NO.	DESCRIPTION
AFG11	12 cal/cm ² , Navy blue,
AFG20	20 cal/cm ² , Navy blue
AFG31	31 cal/cm ² , Royal blue
AFG40	40 cal/cm ² , Gray
AFG55*	55 cal/cm ² , Gray
AFG100*	100 cal/cm ² , khaki

ARC FLASH GLOVES



CAUTION: ARC FLASH GLOVES DO NOT PROVIDE ELECTRICAL PROTECTION. DO NOT USE WHEN INSULATING RUBBER GLOVES ARE REQUIRED.
***IMPORTANT:** NFPA 70E DOES NOT HAVE A HAZARD RISK CATEGORY ABOVE 40 CAL/CM². WORKING ON LEVELS ABOVE 40 CAL/CM² SHOULD BE AVOIDED BECAUSE OF THE BLAST HAZARDS CAUSED BY ARC FLASH.

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

GLOVES BAGS

GLOVE BAGS - Salisbury bags are constructed of heavy duty canvas duck and are double stitched at stress points for extra durability. Canvas bags feature a snap hook for hanging on work belts. Bags feature tapered gussets with wide opening tops for easy insertion.

PRODUCT NUMBERING CHART FOR GLOVE BAGS

CAT. NO.	GLOVE Length in. (mm)	DIMENSIONS in (mm)	WEIGHT lbs. (kgs)
GB112	11 (280)	9" X 14" (229 X 356)	1 (.5)
GB114	14 (356)	9" X 16" (229 X 406)	1 (.5)
GB116	16 (406)	9" X 18" (229 X 457)	1.2 (.6)
GB118	18 (457)	9" X 20" (229 X 508)	1.5 (.7)

GB116



GLOVES INFLATOR

GLOVE INFLATOR - Electrical insulating gloves must be inspected before each use. Inspection is simplified by using a portable glove inflator such as the Salisbury G99 and the G100 with adapter for Class 00 and 0 and smaller size gloves. The Patented G99 is a simple, easy to use, portable glove inflator. The G99 provides a quality means of inspecting gloves in the field. The glove is secured to the inflator using a nylon strap and fastened with hook and pile. Inflation is accomplished by pumping the bellows of the inflator.



GLOVE INFLATOR

CAT. NO.	DESCRIPTION	WEIGHT lbs. (kgs)
G99	Glove inflator kit	2 (.91)
G99B	Replacement bag	-
G99S	Replacement strap	-
G99V	Replacement check valve	-
G100	Glove inflator kit w/ adapter	-
G100A	Small low-volt glove adapter	-

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

ASTM DIELECTRIC FOOTWEAR - 100% TESTED TO 20KV - Salisbury's ASTM dielectric footwear is 100% waterproof and made from premium grade, ozone resistant rubber. The flexible hand-layered construction includes a durable, nylon lining for easy on/off. The sole has a durable construction with a non-skid, bar tread outsole. The attached buckle and hardware is nonmetallic. All of Salisbury's ASTM Dielectric Footwear conforms with ASTM F1117 and is 100% tested to the electrical hazard requirements of ASTM F1116 at 20,000 volts.

DIELECTRIC FOOTWEAR



DIELECTRIC FOOTWEAR

CAT. NO.	DESCRIPTION	SIZES	WEIGHT PR. lbs. (kgs)
21405	17", 1 Buckle overboot	Whole sizes 7 - 16	5.8 (2.6)
21406	14" 1 Buckle overboot	Whole sizes 7 - 17	5.0 (2.3)
51508	Non-buckle overshoe	Whole sizes 7 - 17	3.3 (1.5)
51509	2 Buckle overshoe	Whole sizes 7 - 17	4.4 (2)
51511	Bob sole - non-buckle overshoe	Whole sizes 7 - 16	3.3 (1.5)
51512	Bob sole - 2 buckle overshoe	Whole sizes 7 - 16	4.4 (2)

ARC PROTECTION BLANKETS

ARC PROTECTION BLANKET - Salisbury by Honeywell arc protection blankets are now available in 4' x 5' and 4' x 8' sizes. Each size is available in 15kA or 40kA ratings. The 15kA blankets include convenient loops, and the 40kA blankets include grommets to easily keep the blanket in place. These new blankets are sold individually or with a storage bag or storage bag and tie-strap kit.

ARC45-15



The arc protection blanket is used as a barrier for protection from the explosive and incendiary effects of electrical arcs and flashes. These hazardous electrical discharges can be caused by faults in cables, in cable splices and joints and at transformer terminals. They may also be generated by the operation of switch gear, circuit breakers and lightning arrestors. The blanket can be used for worker protection in underground vaults, switchyards and other locations where electrical equipment poses a risk of exposure to explosive electrical discharges.

CAT. NO.	DIMENSIONS in. (mm)	DESCRIPTION
ARC45-15	48 x 60 (1219 x 1524)	15kA Rating - navy blue
ARC45-40	48 x 60 (1219 x 1524)	40kA Rating -gray/khaki
ARC48-15	48 x 96 (1219 x 2438)	15kA Rating - navy blue
ARC48-40	48 x 96 (1219 x 2438)	40kA Rating -gray/khaki
ARC142	1 x 42 (25.4 x 1067)	Single Kevlar Strap w/ Buckle
ARC142-K16		Arc48 Strap Kit With 16 Buckles
ARC142-K12		Arc45 Strap Kit With 12 Buckles

-Add suffix "P" to include storage bag. -Add suffix "PS" to include storage bag and tie-straps.


-Add suffix "C" to include P4 canister. -Add suffix "CS" to include P4 canister and tie-straps.

SWITCHBOARD MATTING is placed permanently in front of switchgear, motor control centers and other high voltage apparatus to provide an additional level of protection for electrical workers. Switchboard matting is made from 1/4" (6.4mm) thick and tested to 20kV to comply with ASTM D178, Class 2 specifications. The corrugated surface acts as a safety tread while reducing the possibility of metal particles becoming embedded. Class 2, switchboard matting is made in 25 yard rolls which can be custom cut to specified lengths as per customer request. Class 4 is sold in full 60' rolls only.

CAT. NO.	DIMENSIONS in. (mm)	WEIGHT lbs. (kgs)
M24-2	1/4 x 24" (6 x 610)	9 (4.1)
M30-2	1/4 x 30" (6 x 762)	12 (5.4)
M36-2	1/4 x 36" (6 x 914)	15 (6.8)
M48-2	1/4 x 48" (6 x 1219)	18 (8.2)
M36-4*	1/2 x 36" x 60 feet long (12 x 914 mm x 18.3 m long)	684 (307.8)

ARC PROTECTION BLANKETS

M36-2



Class 2 Maximum Use Voltage: 17,000 VAC
 Class 4 Maximum Use Voltage: 36,000 VAC



ROLL BLANKETS - Salisbury has gone to great lengths to protect workers from low voltage electrical hazards by now offering insulating blanket material on a roll. Salisbury's insulating roll blankets, made from a high strength fabric reinforced Type II rubber, allow workers to custom-cut blankets to fit each application at the job site. This minimizes the number of different low voltage blanket sizes and shapes that would otherwise need to be carried from job to job.

All classes of roll blankets are easy to cut and flexible to -40°F. Highly puncture and tear resistant, each class of blanket is also flame (self-extinguishing), oil and ozone resistant. Each comes in a convenient 36" wide roll, 30 feet in length and in unique colors making it easy to identify and highly visible in the work area.

CLEAR PVC ROLL BLANKETS - Salisbury's roll blanket line includes a Class I clear PVC material that permits complete visibility, yet provides the necessary insulating properties meeting ASTM F1742 standards.

CLASS 0 YELLOW LOW VOLTAGE INSULATING BLANKETS - Low voltage Insulating Blankets are made of Type II SALCOR®, ozone resistant rubber and are yellow. Insulating blankets are available with or without hook and pile. These blankets are Class 0 and have a maximum use of 1000VAC. Covering energized equipment is easier than ever using these blankets. Featuring one inch strips of hook and pile double stitched to the blanket with nylon thread, making the installation and removal safe and fast.

LOW-VOLT BLANKETS

RLBPVC1



RLB1



ROLL BLANKETS

CAT. NO.	DESCRIPTION	MAX USE	DIMENSIONS ft. (m)
RLB00	Class 00 brown	500 VAC	3' x 30' (.9 x 9)
RLB0	Class 0 yellow	1000 VAC	3' x 30' (.9 x 9)
RLB1	Class 1 yellow / orange	7500 VAC	3' x 30' (.9 x 9)
RLBPVC1	Class 1 clear PVC	7500 VAC	3' x 30' (.9 x 9)


BLANKET FASTENERS

Blanket Clamp Pins can be effectively used to hold insulating blankets in place. Blanket pins are made of fiberglass reinforced nylon and have molded rubber tips to increase slip resistance.

Magnetic Blanket Buttons are designed for use in eyelets of insulating blankets when covering energized portions in hard to cover areas. Four permanent, floating magnets are mounted between nickel-plated steel plates. May be applied manually, wearing rubber gloves, or with a clampsticks.



LOW-VOLT BLANKETS ACCESSORIES

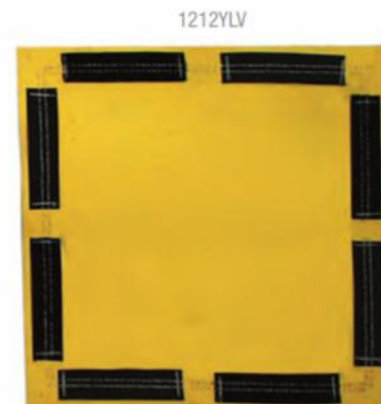

YELLOW LOW VOLTAGE INSULATING BLANKETS

CAT. NO.	DESCRIPTION	TYPE	SIZE In. (mm)	WEIGHT EA. lbs. (kgs)
1212YLV	Class 0 yellow zip	II	12x12 (305x305)	1 (.45)
1212YLVNV	Class 0 yellow plain	II	12x12 (305x305)	1 (.45)
1236YLV	Class 0 yellow zip	II	12x36 (305x914)	1.5 (.48)
1236YLVNV	Class 0 yellow plain	II	12x36 (305x914)	1.5 (.48)
1818YLV	Class 0 yellow zip	II	18x18 (457x457)	1.1 (.48)
1818YLVNV	Class 0 yellow plain	II	18x18 (457x457)	1.1 (.48)

BLANKET CLAMP PIN

CAT. NO.	DESCRIPTION	LENGTH In. (mm)	JAW OPENING In. (mm)	WEIGHT lbs. (kgs)
21	Nylon w/ pin boots	9.5 (241)	5 (127)	.25 (.11)
MB6	Magnetic blanket button	-	-	.044 (.2)

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

INSULATED RESCUE HOOK - Salisbury's insulated rescue hook is an invaluable tool for any workplace. It is used to release a victim from contact. Confined spaces, in vaults, or just near electrical cabinets and switch gear are some of the places where this tool is a must. Insulated rescue hooks feature a foam-filled, fiberglass reinforced handle for superior electrical insulation and a coated, heat treated body hook with an 18" opening and are made in accordance with ASTM Standard F711. The stick is available in the standard lengths of 6 and 8 feet. Other lengths are available as a special order. Contact us with your requirements.

INSULATED RESCUE HOOK



INSULATED RESCUE HOOK

CAT. NO.	DIMENSIONS ft. (m)	WEIGHT lbs. (kgs)
24401	6' (1.8) Length	4.5 (2)
24403	8' (2.4) Length	5.5 (2.5)

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

LOW-VOLT BLANKETS

STATIC DISCHARGE STICK - The Static Discharge Stick is designed to safely remove the static charge after de-energizing. This tool is pre-assembled and includes a brass alloy "U" hook, closed cell foam-filled tubular fiberglass switch stick made in accordance with ASTM Standard F711. Static discharge sticks have 6 feet of copper grounding cable attached to a Salisbury 1814 flat jaw, grade 3, bronze serrated clamp with strain relief.

STATIC DISCHARGE STICK

CAT. NO.	CABLE LENGTH	DESCRIPTION	WEIGHT	
			ft. (m)	lbs. (kgs)
20817	6 (1.8)	Static discharge stick 4' (1.2m) length	8	(3.6)
22629	6 (1.8)	Static discharge stick w/ universal attachment 1' (0.3m) length	.38	(0.17)



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals


Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

LOW-VOLT BLANKETS

TOOL HOLDER SALCOR® Tool Holders secure tools to trailers, compartments and tool rooms. Great for holding rescue hooks and static discharge sticks. 12 per package.

TOOL HOLDER

CAT. NO.	DESCRIPTION	WEIGHT CN lbs. (kgs)
1192	1.25 (32mm) I.D. Tool holder	3.5 (1.6)

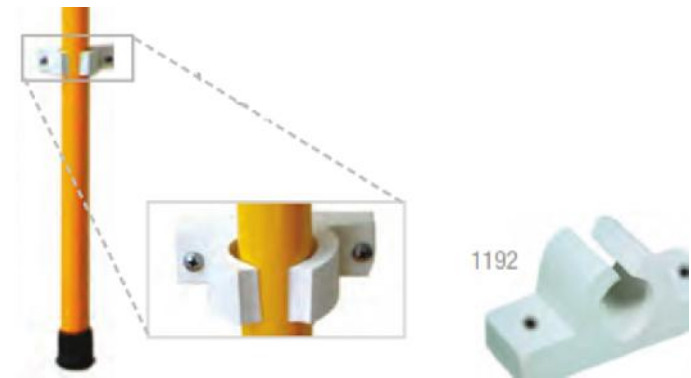

EXTERNAL ROD CLAMPSTICKS EXTERNAL ROD CLAMPSTICKS are constructed of closed cell foam-filled tubular fiberglass in accordance with ASTM standard F711. The hook operating rod, made of solid 3/8" (9.5mm) diameter fiberglass, is mounted on the exterior of the tool so that it can be easily wiped down prior to use.

CLAMPSTICKS & SWITCH STICKS

- Tough thermoplastic head ferrule
- EZ Grip plastic hand grip
- Wide opening 15/16" (23.8mm)
- Stainless steel hook
- Heavy rubber end cap

EXTERNAL ROD CLAMPSTICKS

CAT. NO.	LENGTH		WEIGHT EA.	
	ft	(m)	lbs.	(kgs)
4007	4' 8"	(1.32)	4.2	(1.9)
4008	5' 8"	(1.62)	4.6	(2.1)
4009	6' 8"	(1.93)	5.2	(2.4)
4010	8' 8"	(2.54)	6.2	(2.8)
4011	10' 8"	(3.15)	7.0	(3.2)
4012	12' 8"	(3.76)	7.7	(3.5)
4013	14' 8"	(4.37)	9.4	(4.3)

- Add suffix "S" for a 9864 Switch Stick Head or a "U" for a 9840 Splined Universal Head.

- Clamp sticks may be ordered with these fittings attached to the end by adding the appropriate suffix to the catalog number.



KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

UNIVERSAL SWITCH STICKS - Universal switch sticks are available in one, two and three sections. The sticks have a standard splined head of 1.25" diameter. They are supplied with a #9971 prong. Other lengths are available as a special order. Contact us with your requirements.

CLAMPSTICKS & SWITCH STICKS

UNIVERSAL SWITCH STICKS

CAT. NO.	DIMENSIONS:		WEIGHT EACH	
	Diameter x Length		lbs.	(kgs)
	In x ft	(mm x m)		
4213	1.25 x 4	31.7 x 1.2	2.6	(1.2)
4214	1.25 x 6	31.7 x 1.8	3.4	(1.5)
4215	1.25 x 8	31.7 x 2.4	4.1	(1.9)





SALISBURY GROUNDING CABLES GROUNDING CABLES are made with extra flexible strand of soft drawn #30 AWG (.01") copper and are available in three different jackets.

GROUNDING CABLES

The yellow thermoplastic elastomer jacketed cable is the standard for grounding service. It provides a combination of economy, flexibility and durability. The service temperature ranges from 200° to -50°F. ASTM F 855 Type I.



The black thermoplastic elastomer jacketed cable has a smaller diameter and thinner jacket material giving it better flexibility than the yellow cable. The service temperature ranges from 200° to -50°F. ASTM F 855 Type I.

The transparent flexible thermoplastic (PVC) jacketed cable allows easy inspection for strand breakage. The flexibility decreases with low temperatures. The minimum recommended service temperature is 0°F. ASTM F 855 Type III.

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

GROUNDING CABLES

SALISBURY GROUNDING CABLES

	CAT NO.	SIZE	STRAND DIA. in. (mm)	JACKET in. (mm)	SHORT CIRCUIT WITHSTAND AMPS, RMS, 60Hz		CONTINUOUS Current AMPS,RMS,60Hz	WT./1000FT. lbs. (kgs)
					15 Cycles	30 Cycles		
YELLOW	2136	#2-665W	.35 (8.9)	.50 (12.7)	14500	10000	200	282 (127)
	2137	1/0-1064W	.45 (11.4)	.62 (15.7)	21000	15000	250	488 (221)
	2138	2/0-1330W	.49 (12.4)	.65 (16.5)	27000	20000	300	537 (243)
	2139	4/0-2109W	.62 (1.7)	.83 (21.1)	43000	30000	400	836 (379)
BLACK	2636	#2-665W	.35 (8.9)	.47 (12)	14500	10000	200	263 (119)
	2637	1/0-1064W	.45 (11.4)	.58 (14.7)	21000	15000	250	404 (183)
	2638	2/0-1330W	.49 (12.4)	.63 (16)	27000	20000	300	497 (225)
	2649	3/0-1672W	.55 (14)	.72 (18.3)	36000	25000	350	680 (308)
	2639	4/0-2109W	.62 (1.7)	.78 (19.8)	43000	30000	400	770 (349)
CLEAR	2128	#2-665W	.35 (8.9)	.53 (13.5)	14500	10000	200	289 (131)
	2129	1/0-1064W	.45 (11.4)	.64 (16.3)	21000	15000	250	520 (235)
	2133	2/0-1330W	.49 (12.4)	.70 (17.8)	27000	20000	300	546 (247)
	2288	4/0-2109W	.62 (1.7)	.84 (21.3)	43000	30000	400	841 (381)



GROUNDING CABLES

SALISBURY GROUNDING CONFIGURATOR™ - Salisbury's Grounding Configurator™ makes specifying grounding equipment simple and easy. This interactive web tool allows you to easily build the proper temporary grounding equipment for your specific needs. The step by step process takes out the guess work and makes it easy to change components until the most appropriate ground set is developed.

Just go to our web site and give it a try. You will be prompted from start to finish. All you need to know is the maximum fault current and the duration of the fault and the configurator will do the rest. No more second guessing quantities or parts to be sure that you have put together a ground set that will function just as you expect. When you finish, enter your personal information and the configurator will instantly provide you with the bill of materials including part numbers. All that's left to do is to place the order!

SALISBURY Progress for Configuration #1

Clamping Clamps A Clamps B

Welcome to the Salisbury Grounding Configurator™. Over the next several steps, you will be asked specific questions that will help determine which Salisbury grounding components you will need to meet your system's requirements. You can track your progress through the Configurator at the end of each step.

Select your grounding configuration using the pictures below.

Select your cable size / withstand rating from the chart below.

In order to select cable size you need to know the maximum fault current of the system and the duration of fault (length of time to permit protective relays and circuit breakers to clear the fault).

Cable Size	ASTM Grade	Withstand Rating kA (kAIC)*	
		15 Cycles	30 Cycles
1/2"	4	11	10
3/8"	4	14	13
5/16"	5	22	20
3/16"	4	34	33
1/4"	5	43	40

*Withstand properties are based on performance with copper, not aluminum (Al) security factor.

The above chart is from ASTM E588 Standard Specification for Temporary Protective Grounds to be used on Energized Electric Power Line and Equipment. The appropriate Copper texture will be checked on the cable size.

Note: If you are unable to determine the required cable size, please contact Salisbury for assistance at sales@salisbury.com or toll free at 877-406-4581.

Connect to the next step

© Salisbury | Safety Products | San Antonio, Texas 78201
www.salisbury.com | Telephone: 877-406-4581 | Fax: 214-246-9100 (TX-214)

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

BALL & SOCKET SYSTEM - The ball and socket grounding system allows for variable angle accessibility. This system is compact and light weight. The 211 Socket Clamp is made from bronze alloy with an integral cable support and strain relief sleeve. This is the ideal grounding system for industrial and substation environments.

THE NEW BALL STUD C CLAMP is a universal clamp that allows linemen to use it as both a 1" ball stud and 1 1/2" C clamp. The ergonomic design minimizes physical effort with smoother twists allowing for a faster, easier installation.

Other clamps are available. Please contact your local Salisbury representative for more information.

BALL & SOCKET GROUNDING SYSTEM & FERRULES



BALL & SOCKET SYSTEM - BALL STUDS

CAT. NO.	DESCRIPTION	DIMENSIONS in. (mm)	WEIGHT EA. lbs. (kgs)
21191	Ball Stud Short	4.38 (111)	.53 (.23)
21192	Ball Stud Long	6.13 (156)	.81 (.37)
24082	Internal Thread Ball Stud	4 (102)	.54 (.25)
21228	Offset NEMA Pad Short	5.13 x 1.5 (130 x 38)	.84 (.38)
24087	Offset NEMA Pad Long	7 x 1.5 (178 x 38)	1 (.45)
21236	Cover for Ball Stud	-	.09 (.04)

BALL & SOCKET SYSTEM - SOCKET CLAMPS

CAT. NO. & DESCRIPTION	ASTM Grade	CONTINUOUS CURRENT Rating (AMPS,RMS,60Hz)	WEIGHT EA. lbs. (kgs)
22675 1" Ball Stud C Clamp w/ strain relief	5	400	2.7 (1.22)
22704 1" Ball stud C Clamp w/o strain relief	5	400	2.6 (1.18)
21190 w/ Strain Relief Sleeve	5	400	1.2 (.54)
21277 w/o Strain Relief Sleeve	5	400	1.1 (.5)

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: lockout@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

KRM Corporation LOTO & Safety Products
 An ISO 9001:2008 Certified company CE Certified

Lockout & Tagout Barrier System Signs & Posters Tapes Road Safety Parking Security PPE Doorseals & Windowseals

Postal Address: 615, Sec-15A, Faridabad- Haryana-NCR- India, Zip Code: 121007

PLAIN SHROUDED & UNSHROUDED FERRULES Plain ferrules are designed for use with all grounding clamps that feature pressure terminal including the 1" duckbill and 1.5" flat jaw clamp.

Copper ferrules are available in two different styles: unshrouded and shrouded. Shrouded ferrules are compressed on both the conductor and the jacket of the cable to reduce bending stress. Unshrouded ferrules are crimped on the conductor strands only. These ferrules are manufactured of tin plated, 99.5% pure copper.

PLAIN SHROUDED & UNSHROUDED FERRULES



CAT. NO.	CABLE SIZE	STRAND DIE CODES T&B	JACKET DIE CODES T&B	BURNDY DIE NUMBER	WEIGHT EA. PAIR lbs. (kgs)
SHROUDED					
24424	#2	50	71	-	0.30 (.14)
24425	1/0	50	71	-	0.35 (.16)
24426	2/0	60	76	-	0.40 (.18)
24427	4/0	t66	106	-	0.45 (.20)
UNSHROUDED					
24420	#2	50	-	-	0.30 (.14)
24421	1/0	50	-	U243	0.30 (.14)
24422	2/0	60	-	U245	0.35 (.16)
24423	4/0	66	-	U247	0.35 (.16)



SELF TESTING VOLTAGE DETECTOR KITS - Salisbury's self-testing voltage detectors allow testing to be continuous and automatic. An intermittent flash and beep confirms the detector is functioning properly.

Self-testing voltage detectors are used to verify live or de-energized conductors. These testers may be used with insulating rubber gloves or hot sticks using the splined universal end fitting. Testers indicate voltage with an extra bright LED light and a distinctive audible signal. It is recommended that the tester be moved closer to the conductor until a warning is indicated, or it touches the conductor, apparatus, or test point. Each tester includes three "C" batteries.

The need for additional PPE can be minimized by confirming that there is no electrical hazard present before work is performed. This can be determined by using a Salisbury voltage detector attached to an insulating hot stick of a length long enough to keep the worker outside of the arc flash boundary.

The Salisbury voltage detector alarms in the proximity of electric fields, so that it is not necessary to make physical contact with the equipment being checked. It is made of non-conductive materials, meaning that it will not conduct electricity nor will it cause an arc flash, even if contact with energized equipment is made.

SELF TESTING VOLTAGE DETECTOR KIT



SELF TESTING VOLTAGE DETECTOR KITS

CAT. NO.	SETTINGS
4556	1-4544 Detector 240V to 230kV, 1-21517 Case, 1-2500 clampstick adapter
4667	1-4644 Detector 240V to 500kV, 1-21517 Case, 1-2500 clampstick adapter
4769	1-4744 Detector 240V to 69kV, w/ URD test point setting 15, 25,35kV 1-21517 Case, 1-2500 clampstick adapter