



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lockoutappliances.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

# KRM LOTO GATE VALVE LOCKOUT



KRM-K-3GVL-02 -MT

**KRM Corporation Lockout Tagout**

**KRM Corporation Electrical Safety Products**

**KRM Corporation TRAINING**

**KRM Corporation Parking & Road Safety Products**

**KRM Corporation Signage & Tapes**

**KRM Corporation Other Products**





OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

Email: info@krmlogo.com, info@krmcorporation.com, krmlogo@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmlogo.com | www.locktagindia.com | www.lotoappliances.com

# KRM LOTO GATE VALVE LOCKOUT DEVICES



MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	VALVE HANDLE (SIZE)	NUMBER OF HOLES
KRM-K-GVL-02	66mm	36mm	80mm	41mm	9mm	1"-2.5" 25-63.5mm	3
KRM-K-GVL-04	132mm	43mm	148mm	49mm	9mm	2.5"-5.11" 63.5-130mm	3
KRM-K-GVL-06=NMDLA	190mm Extend 155mm close	45mm	250mm	48mm	9mm	1"-7.5" 25-190mm	5
KRM-K-GVL-08	280mm	51mm	290mm	64mm	9mm	6.5"-11" 165-280mm	3
KRM-K-GVL-10	381mm	61mm	392mm	73mm	9mm	11"-15" 280-381mm	3



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1  
PAN No.: AAECK2831L  
TIN No.: 06824000112  
CIN No.: U31903HR2011PTC042508  
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

# GATE VALVE LOCKOUT

The Gate valve is a locking arrangement that is used to lock spindle and wheel of the gate valve when it's closed and then locked by an authorized person to prevent injuries to the repairmen working at industrial areas, also it's low in cost and safe to secure human error, different five sizes are available.





OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



www.lockouttagouts.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



**KRM LOTO – GATE VALVE LOCKOUT- INDEX**

**Index Page No:-4**

SR.NO	KRM LOTO PART CODE	PRODUCT NAME	WEIGHT (kg)	TECHNICAL PAGE NO.
1	KRM-K-GVL-02	KRM LOTO GATE VALVE LOCKOUT WITH ONE HOLE	0.060	5-6
2	KRM-K-2-GVL-02	KRM LOTO GATE VALVE LOCKOUT WITH TWO HOLE	0.060	5-6
3	KRM-K-2-GVL-03	KRM LOTO GATE VALVE LOCKOUT WITH THREE HOLE	0.060	5-6
4	KRM-K-GVL-04	KRM LOTO GATE VALVE LOCKOUT - 63.5 TO 130 MM	0.190	7-8
5	KRM-K-GVL-06= KRM-K-NMDLA-R	KRM LOTO GATE VALVE LOCKOUT - RED - ADJUSTABLE TYPE	0.300	9-10
6	KRM-K-GVL-06= KRM-K-NMDLA-Y	KRM LOTO GATE VALVE LOCKOUT - YELLOW - ADJUSTABLE TYPE	0.300	11-12
7	KRM-K-GVL-08	KRM LOTO GATE VALVE LOCKOUT - BIG SIZE - 165 TO 280MM	0.620	13-14
8	KRM-K-GVL-10	KRM LOTO GATE VALVE LOCKOUT - BIG SIZE - 280 TO 381 MM	1.130	15-16
9	KRM-K-GVL08 -C AND KRM-K-GVL-10-C	KRM LOTO GATE VALVE LOCKOUT -CUSTOMIZED FOR MODEL NO GVL-08 AND GVL-10	2	17



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



## KRM LOTO - GATE VALVE LOCKOUT DEVICE

- KRM-K-GVL-02 KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to – 46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Material** – Poly Propylene.
- **Model** – 2/3 holes locking option is KRM standard product
- **Size Applicable** – Suitable for:
  - **KRM-K-GVL-02** for 25 mm to 63.5 mm (1" – 2.5") wheel diameter
  - **KRM-K-2-GVL-02** for 25 mm to 63.5 mm (1" – 2.5") wheel diameter
  - **KRM-K-3-GVL-02** for 25 mm to 63.5 mm (1" – 2.5") wheel diameter
  - **KRM-K-3GVL-02-MT** for 25 mm to 63.5 mm (1" – 2.5") wheel diameter
- **Color** – Standard color Red Or any color make as per volume
- **Weight** – 60gm
- **NOTE APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**



KRM-K-GVL-02



KRM-K-2-GVL-02




KRM-K-3GVL-02-MT



KRM-K-3-GVL-02

MODELS	INSIDE DIAMETER	INSIDE HEIGHT	OUTSIDE DIAMETER	OUTSIDE HEIGHT	LOCK HOLE	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-02	66mm	36mm	80mm	42mm	9mm	25-63.5mm	1
KRM-K-2-GVL-02	66mm	36mm	80mm	42mm	9mm	25-63.5mm	2
KRM-K-3-GVL-02	66mm	36mm	80mm	42mm	9mm	25-63.5mm	3
KRM-K-3GVL-02-MT	66mm	36mm	80mm	42mm	9mm	25-63mm	3

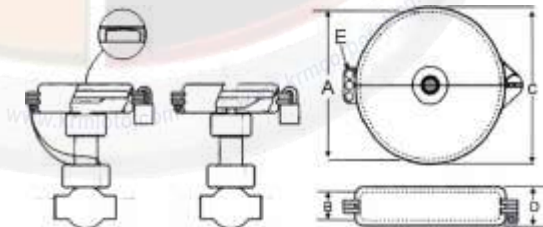



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269




www.lotoappliances.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA  
www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

**LOCKOUT/TAGOUT**



**GATE VALVE LOCKOUT DEVICE-02**





- KRM-K-GVL-02 KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers with stand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to -46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- Material – Poly Propylene.
- Model – 2/3 holes locking option is KRM standard product
- Size Applicable – Suitable for:  
KRM-K-GVL-02 for 25 mm to 63.5 mm (1" – 2.5") wheel diameter  
KRM-K-2-GVL-02 for 25 mm to 63.5 mm (1" – 2.5") wheel diameter  
KRM-K-2-GVL-03 for 25 mm to 63.5 mm (1" – 2.5") wheel diameter  
KRM-K-3-GVL-02-MT for 25 mm to 63.5 mm (1" – 2.5") wheel diameter
- Color – Standard color Red Or any color make as per volume.
- Weight – 60gm
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**



**KRM-K-GVL-02**



**KRM-K-3-GVL-02-MT**



MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-02	66mm	36mm	80mm	42mm	9mm	1"-2.5" 25-63.5mm	1
KRM-K-2-GVL-02	66mm	36mm	80mm	42mm	9mm	1"-2.5" 25-63.5mm	2
KRM-K-3-GVL-02	66mm	36mm	80mm	42mm	9mm	1"-2.5" 25-63.5mm	3
KRM-K-3-GVL-02-MT	66mm	36mm	80mm	42mm	9mm	1"-2.5" 25-63.5mm	3

GSTIN No.: 06AAVPW8746Q1Z6,  
PAN No.: AAVPW8746Q  
TIN No.: 06821328889,  
TAN no.: RTKKO3359G  
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com





GSTIN No.: 06AAECK2831L1Z1  
PAN No.: AAECK2831L  
TIN No.: 06824000112  
CIN No.: U31903HR2011PTC042508  
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

## KRM LOTO - GATE VALVE LOCKOUT DEVICE- KRM-K-GVL-04

- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to – 46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Material** – Poly Propylene.
- **Model** – 3 holes locking option is KRM standard product,
- **Size** - KRM-K-GVL-04 for 63.5 mm to 130 mm diameter.
- **Color** – Standard color Red Or any color make as per volume.
- **Weight** – 190 gm
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**

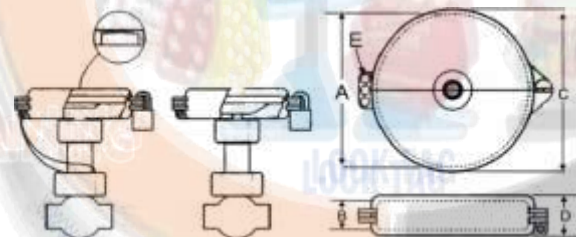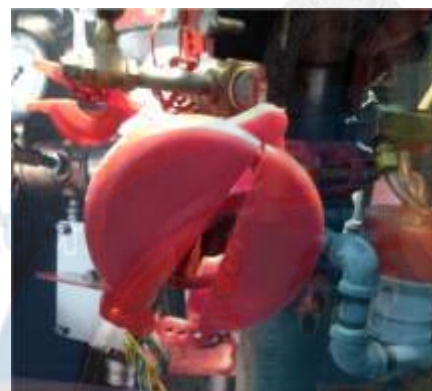

MODELS	INSIDE DIAMETER	INSIDE HEIGHT	OUTSIDE DIAMETER	OUTSIDE HEIGHT	LOCK HOLE	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-04	132mm	43mm	148mm	49mm	9mm	63.5mm-130mm	3



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147 & 1910.269



www.lotoappliances.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA  
www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

**LOCKOUT/TAGOUT**




**GATE VALVE LOCKOUT DEVICE-04**

CE Certified



**KRM-K-GVL-04**



- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to - 46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Material** – Poly Propylene.
- **Model** – 3 holes locking option is KRM standard product,
- **Size** - KRM-K-GVL-04 for 63.5 mm to 130 mm diameter.
- **Color** – Standard color Red Or any color make as per volume.
- **Weight** – 190gm
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**



MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER (C)	OUTSIDE HEIGHT (D)	LOCK HOLE (E)	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-04	132mm	43mm	148mm	49mm	9mm	2.5"-5.11" 63.5-130mm	3






## KRM LOTO - GATE VALVE LOCKOUT DEVICE - ADJUSTABLE TYPE-KRM-K-GVL-06

- Material** – Poly Propylene with pasted label of identification KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to – 46°C to 177°C.
- Model** – with five holes for Group isolation , that can be locked by using padlock.
- Its speciality is that its very flexible lockout arrangement that fits on gate valve of different dimensions, also very compact and easy carrying Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- Size Applicable** – Suitable for KRM-K-GVL-06 =KRM-K-NMDLA-R for 25 mm to 190 mm diameter.
- Color** – Red
- Weight** – 300 gms
- APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**



**KRM-K-GVL-06=KRM-K-NMDLA-R**

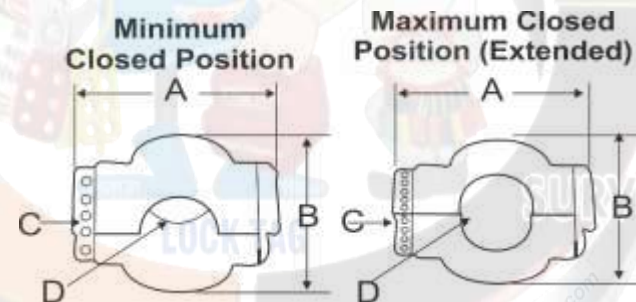

MODELS	INSIDE DIAMETER	INSIDE HEIGHT	OUTSIDE DIAMETER	OUTSIDE HEIGHT	LOCK HOLE	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-06=KRM-K-NMDLA-R	190mm Extend 155mm Close	45mm	250mm	48mm	9mm	25mm-190mm	5



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lockouttagouts.com



**LOCKOUT/TAGOUT**



CE  
Certified

**ADJUSTABLE GATE VALVE LOCKOUT DEVICE-06**

- **Material** – Poly Propylene with pasted label of identification KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to – 46°C to 177°C.
- **Model** – with five holes for Group isolation , that can be locked by using padlock.
- Its speciality is that its very flexible lockout arrangement that fits on gate valve of different dimensions, also very compact and easy carrying Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Size Applicable** – Suitable for KRM-K-GVL-06 =KRM-K-NMDLA-R-Y for 25 mm to 190 mm diameter.
- **Color** – Red, Yellow
- **Weight** – 300gm
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**




KRM-K-GVL-06 =  
KRM-K-NMDLA



KRM-K-NMDLA-Y



KRM-K-NMDLA-Y



MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-06 = KRM-K-NMDLA	190mm Extend 155mm close	45mm	250mm	48mm	9mm	1"-7.5" 25-190mm	5





OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA


www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

## KRM LOTO - ADJUSTABLE GATE VALVE LOCKOUT DEVICE - YELLOW - TYPE- KRM-K-NMDLA-Y

- **Material** – Poly Propylene with pasted label of identification.
- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to – 46°C to 177°C.
- **Model** – with five holes for Group isolation , that can be locked by using padlock.
- Its speciality is that its very flexible lockout arrangement that fits on gate valve of different dimensions, also very compact and easy carrying Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Size** Applicable – Suitable for KRM-K-GVL-06 =KRM-K-NMDLA-Y for 25 mm to 190 mm diameter.
- **Color** – Yellow
- **Weight** – 300 gms
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**



**KRM-K-GVL-06=**  
**KRM-K-NMDLA-Y**

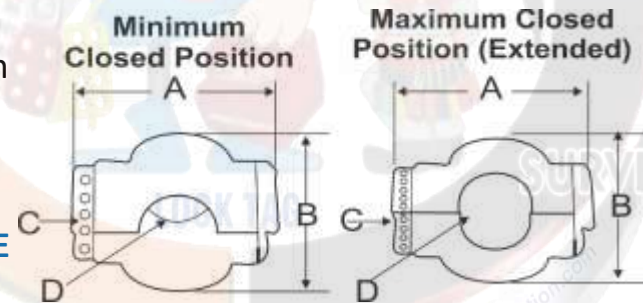

MODELS	INSIDE DIAMETER	INSIDE HEIGHT	OUTSIDE DIAMETER	OUTSIDE HEIGHT	LOCK HOLE	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-06= KRM-K-NMDLA-Y	190mm Extend 155mm Close	45mm	250mm	48mm	9mm	25mm-190mm	5



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lockoutappliances.com



**LOCKOUT/TAGOUT**




**ADJUSTABLE GATE VALVE LOCKOUT DEVICE-06**



**KRM-K-GVL-06 =  
KRM-K-NMDLA**



**KRM-K-NMDLA-Y**



- **Material** – Poly Propylene with pasted label of identification KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to – 46°C to 177°C.
- **Model** – with five holes for Group isolation , that can be locked by using padlock.
- Its speciality is that its very flexible lockout arrangement that fits on gate valve of different dimensions, also very compact and easy carrying Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Size Applicable** – Suitable for KRM-K-GVL-06 =KRM-K-NMDLA-R-Y for 25 mm to 190 mm diameter.
- **Color** – Red, Yellow
- **Weight** – 300gm
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**



MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-06 = KRM-K-NMDLA	190mm Extend 155mm close	45mm	250mm	48mm	9mm	1"-7.5" 25-190mm	5



OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



www.lotoappliances.com




## KRM LOTO - GATE VALVE LOCKOUT-KRM-K-GVL-08

- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to – 46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Material** – Poly Propylene.
- **Model** – 3 holes locking option is KRM standard product.
- **Size** - KRM-K-GVL-08 for 165 mm to 280 mm diameter.
- **Color** – Standard color Red Or any color make as per volume.
- **Weight** – 620 gm
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**



**KRM-K-GVL-08**

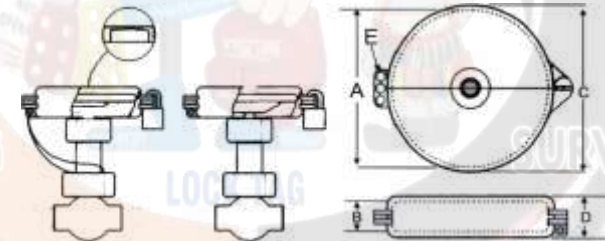

MODELS	INSIDE DIAMETER	INSIDE HEIGHT	OUTSIDE DIAMETER	OUTSIDE HEIGHT	LOCK HOLE	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-08	280mm	51mm	290mm	64mm	9mm	165mm-280mm	3



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com





**LOCKOUT/TAGOUT**



**GATE VALVE LOCKOUT DEVICE-08**



**KRM-K-GVL-08**



- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to - 46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Material** – Poly Propylene.
- **Model** – 3 holes locking option is KRM standard product.
- **Size** - KRM-K-GVL-08 for 165 mm to 280 mm diameter.
- **Color** – Standard color Red Or any color make as per volume.
- **Weight** – 620gm
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**

MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-08	280mm	51mm	290mm	64mm	9mm	6.5"-11" 165-280mm	3



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269



www.locktagindia.com




**KRM LOTO - GATE VALVE LOCKOUT-KRM-K-GVL-10**

- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to – 46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Material** – Poly Propylene.
- **Model** – 3 holes locking option is KRM standard product.
- **Size** - KRM-K-GVL-10 for 280 mm to 381 mm diameter.
- **Color** – Standard color Red Or any color make as per volume.
- **Weight** – 1170gms
- **APPLICABLE FOR VALVE HANDLE- OUTER WHEEL DIAMETER NOT VALVE SIZE**



**KRM-K-GVL-10**

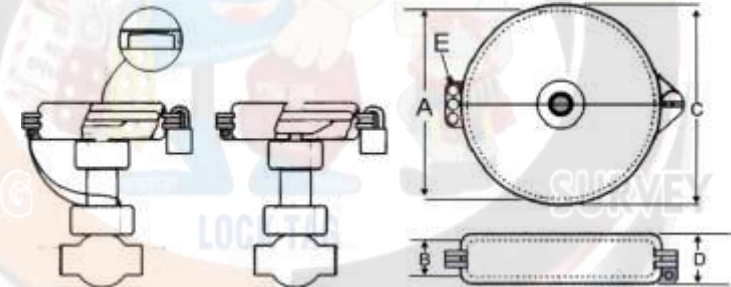

MODELS	INSIDE DIAMETER	INSIDE HEIGHT	OUTSIDE DIAMETER	OUTSIDE HEIGHT	LOCK HOLE	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-10	381mm	61mm	392mm	73mm	9mm	280mm-381mm	3



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269





www.locktagindia.com



**LOCKOUT/TAGOUT**



**KRM-K-GVL-10**



**GATE VALVE LOCKOUT DEVICE-10**



- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to - 46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Material** – Poly Propylene.
- **Model** – 3 holes locking option is KRM standard product.
- **Size** – KRM-K-GVL-10 for 280 mm to 381 mm diameter.
- **Color** – Standard color Red Or any color make as per volume.
- **Weight** – 1200gm
- **APPLICABLE FOR VALVE HANDLE - OUTER WHEEL DIAMETER NOT VALVE SIZE**



**KRM-K-GVL-10-C**

MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	WHEEL DIAMETER	NUMBER OF HOLES
KRM-K-GVL-10	381mm	61mm	392mm	73mm	9mm	11"-15" 280-381mm	3



GSTIN No.: 06AAVPW8746Q126,  
PAN No.: AAVPW8746Q  
TIN No.: 06821328889,  
TAN no.: RTKKO3359G  
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L12I  
PAN No.: AAECK2831L  
TIN No.: 06824000112  
CIN No.: U31903HR2011PTC042508  
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

## KRM LOTO - CUSTOMIZE GATE VALVE KRM-K-GVL08-C & KRM-K-GVL-10-C

- KRM LOTO Gate Valve Lockout is used for those Valve having spindle, we can make customize cut out on the top of lockout device. So you can able to use spindle device for Isolation.
- **Material** – Poly Propylene.
- **Color** – Standard color Red Or any color make as per volume.
- **APPLICABLE FOR VALVE HANDLE- OUTER WHEEL DIAMETER NOT VALVE SIZE**



KRM-K-GVL-08-C  
KRM-K-GVL-10-C



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



[www.krmcorporation.com](http://www.krmcorporation.com) | [www.lockouttagouts.com](http://www.lockouttagouts.com) | [www.krmloto.com](http://www.krmloto.com) | [www.locktagindia.com](http://www.locktagindia.com) | [www.lotoappliances.com](http://www.lotoappliances.com)



For more details  
login our website.

For more details on LOTO and Safety Products visit our website – [www.krmcorporation.com](http://www.krmcorporation.com)

GSTIN No.: 06AAVPW8746Q1Z6,  
PAN No.: AAVPW8746Q  
TIN No.: 06821328889,  
TAN no.: RTKKO3359G  
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1  
PAN No.: AAECK2831L  
TIN No.: 06824000112  
CIN No.: U31903HR2011PTC042508  
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

## LOCKOUT/TAGOUT

### Notes:

- Lock & Tag should be used with all loto products.
- For group locking on particular energy hasp should be used.
- Group lockout box should be used for group lockout tagout.
- Scissor Cable or Round cable lockout can be used to lock multiple hazardous energies instead putting individual locks & tags.