



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.locktagindia.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.locktagindia.com | www.locktagindia.com

INR

KRM Corporation
Lockout Tagout



KRM Corporation
Electrical Safety
Products



KRM Corporation
TRAINING



KRM Corporation
Parking & Road
Safety Products



KRM Corporation
Signage & Tapes



KRM Corporation
Other Products





OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269





www.lockoutappliances.com



**KRM LOTO LOCK TAG SAFE LOTO : WEATHER/ WATER PROOF OSHA SAFETY LOCK TAG
 PADLOCK – 38MM SHACKLE HEIGHT**



METAL SHACKLE

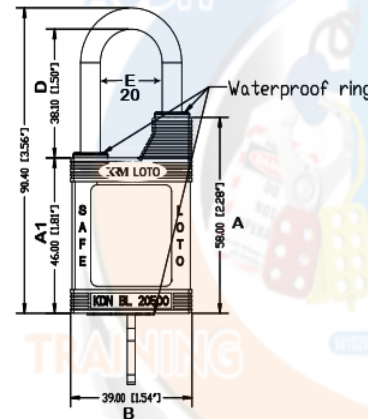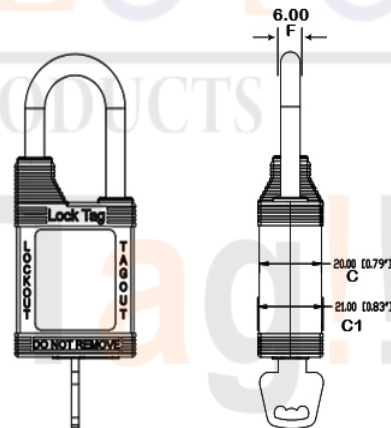

NYLON SHACKLE

BODY HEIGHT (A/A1)	BODY WIDTH (B)	BODY DEPTH (C/C1)	SHACKLE HEIGHT (D)	SHACLE WIDTH (E)	SHACKLE THICKNESS (F)
46 - 58 mm	39 mm	20 - 21 mm	38 mm(Regular)	20 mm	6 mm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.locktagindia.com



LOCKOUT/TAGOUT





**KRM LOTO LOCK TAG SAFE LOTO : WEATHER/ WATER PROOF
OSHA SAFETY LOCK TAG PADLOCK – 38MM SHACKLE HEIGHT**

CE Certified



METAL SHACKLE

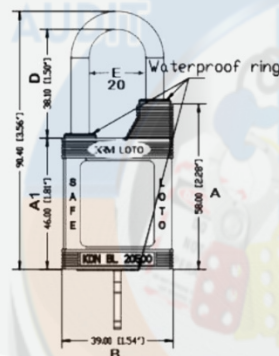

NYLON SHACKLE

ITEM CODE	BODY HEIGHT (A/A1)	BODY WIDTH (B)	BODY DEPTH (C/C1)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-38WP-OSLTP-NDK	46-58mm	39mm	20-21mm	38mm	20mm	6mm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.locktagindia.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



KRM LOTO – WEATHER WATER PROOF OSHA SAFETY PADLOCK- INDEX

Index Page No:-3

SR.NO	KRM LOTO PART CODE	PRODUCT NAME	WEIGHT (kg)	TECHNICAL PAGE NO.
1	KRM-K-381WP-OSLTP-MDK (WITH ONE KEY)	'Weather/ water Proof OSHA Safety Lock Tag Padlocks - 38 mm Metal Shackle Height differ key	0.1	5-6
2	KRM-K-382WP-OSLTP-MDK (WITH TWO KEY)	'Weather/ water Proof OSHA Safety Lock Tag Padlocks - 38 mm Metal Shackle Height differ key	0.1	5-6
3	KRM-K-381WP-OSLTP-MDK+M	'Weather/ water Proof OSHA Safety Lock Tag Padlocks - 38 mm Metal Shackle Height (DIFFER +MASTER KEY)	0.1	5-6
4	KRM-K-382WP-OSLTP-MDK+M	'Weather/ water Proof OSHA Safety Lock Tag Padlocks - 38 mm Metal Shackle Height (DIFFER +MASTER KEY)	0.1	5-6
5	KRM-K-381WP-OSLTP-NDK (WITH ONE KEY)	'WEATHER / WATER PROOF OSHA SAFETY LOCK TAG PADLOCKS - 38 MM NYLON SHACKLE HEIGHT DIFFER KEY	0.1	7-8
6	KRM-K-382WP-OSLTP-NDK (WITH TWO KEY)	'WEATHER / WATER PROOF OSHA SAFETY LOCK TAG PADLOCKS - 38 MM NYLON SHACKLE HEIGHT DIFFER KEY	0.1	7-8
7	KRM-K-381WP-OSLTP-NDK+M	'Weather / Water Proof OSHA Safety Lock Tag Padlocks - 38 mm Nylon Shackle Height (DIFFER +MASTER KEY)	0.1	7-8
8	KRM-K-382WP-OSLTP-NDK+M	'Weather / Water Proof OSHA Safety Lock Tag Padlocks - 38 mm Nylon Shackle Height (DIFFER +MASTER KEY)	0.1	7-8
9	KRM-K-WPP	KRM LOTO – WATER PROOF METAL PADLOCK	0.2	9-10
10		FEATURE OF OSHA LOCKS		11-12



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com



WEATHER/ WATER PROOF OSHA SAFETY LOCK TAG PADLOCK – 38MM METAL SHACKLE HEIGHT

- Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized
- Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.
- KRM LOTO WEATHER/ WATER PROOF SAFETY PADLOCK ---"seamless" lock structure durability- The new management key technology,- 10 level management.
- Key Head in injection mold with same color of the lock.
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title 29 Code of Federal Regulations(CFR)Part 1910.147
- High Quality with waterproof, corrosion resistant and strong adhesive.
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- Key system: DIFFER KEY, ALIKE KEY, MASTER KEY (SET OF 100,200,500 PCS)
- Body material: Glass fiber reinforced (composition of ABS+NYLON)
- Shackle Material: Metal
- **Color:** Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- Work temperature 0o - 250o F (-20o - 120o C)
- Also "**DO NOT REMOVE**", permanently engraved on the lock.
- **Weight** – 110gm

Special fluorescent color available on volume basis.

KRM-K-382WP-OSLTP-MDK
 (WITH TWO KEY)
 KRM-K-382WP-OSLTP-MDK+M
 (EACH LOCK WITH TWO KEY & MASTER KEY
 OPTION)



KRM-K-381WP-OSLTP-MDK(WITH ONE KEY)
KRM-K-381WP-OSLTP-MDK+M
(EACH LOCK WITH ONE KEY & MASTER KEY OPTION)

BODY HEIGHT (A/A1)	BODY WIDTH (B)	BODY DEPTH (C/C1)	SHACKLE HEIGHT (D)	SHACLE WIDTH (E)	SHACKLE THICKNESS (F)
46 - 58 mm	39 mm	20 - 21 mm	38 mm(Regular)	20 mm	6 mm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



LOCKOUT/TAGOUT



**WEATHER/ WATER PROOF OSHA SAFETY LOCK TAG PADLOCK
38MM METAL SHACKLE**

CE
Certified

Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Unwanted Stealing. Provided With **Latest Locking Mechanism** Used To Lock The Different Devices.

- **KRM LOTO WEATHER/ WATER PROOF SAFETY PADLOCK** ---"seamless" lock structure durability- The new management key technology,- 10 level management.
- **Key Head in injection mold with same color of the lock.**
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title **29 Code of Federal Regulations(CFR)Part 1910.147**
- High Quality with waterproof, corrosion resistant and strong adhesive.
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- **Key system:** DIFFER KEY, ALIKE KEY,
- **MASTER KEY (SET OF 100,200,500 PCS)**
- **Body material:** Glass fiber reinforced (composition of ABS+NYLON)
- **Shackle Material:** Metal
- **Color:** Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- **Work temperature** 0° - 250° F (-20° - 120° C)
- Also "DO NOT REMOVE", permanently engraved on the lock.
- **Weight** – 110gm




KRM-K-382WP-OSLTP-MDK
(WITH TWO KEY)
KRM-K-382WP-OSLTP-M
DK+M (EACH LOCK WITH TWO KEY &
MASTER KEY OPTION)

KRM-K-382WP-OSLTP-MDK
(WITH ONE KEY)

KRM-K-382WP-OSLTP-M
DK+M (EACH LOCK WITH ONE KEY &
MASTER KEY OPTION)

Special fluorescent color available on volume basis.



ITEM CODE	BODY HEIGHT (A/A1)	BODY WIDTH (B)	BODY DEPTH (C/C1)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-38WP-OSLTP-MDK	46-58mm	39mm	20-21mm	38mm	20mm	6mm

KRM CORPORATION
ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015
info@krmcorporation.com, info@krmloto.com, krmloto@gmail.com, wadharajinder@gmail.com

M: 00 91 9810 291 381, 8800 544 881, T: 00 91 129 - 4021 381

Postal Add: 615, Sector-15A, Faridabad-121007
Regd. Office: 1H/31A, N.I.T. Faridabad-121001 Haryana - NCR (INDIA)

www.krmloto.com www.krmcorporation.com, www.safetyloto.com
www.lotoappliances.com, www.lockouttagouts.com



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com



WEATHER/ WATER PROOF OSHA SAFETY LOCK TAG PADLOCK – 38MM NYLON SHACKLE HEIGHT

- Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.
- KRM LOTO WEATHER/ WATER PROOF SAFETY PADLOCK ---"seamless" lock structure durability- The new management key technology,- 10 level management.
- Key Head in injection mold with same color of the lock.
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title 29 Code of Federal Regulations(CFR)Part 1910.147
- High Quality with waterproof, corrosion resistant and strong adhesive.
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- Key system: DIFFER KEY, ALIKE KEY, MASTER KEY (SET OF 100,200,500 PCS)
- **Body material:** Glass fiber reinforced (composition of ABS+NYLON)
- **Shackle Material:** Nylon
- **Color:** Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- Work temperature 0o - 250o F (-20o - 120o C)
- Also "DO NOT REMOVE", permanently engraved on the lock.
- **Weight** – 100gm

Special fluorescent color available on volume basis.



KRM-K-382WP-OSLTP-NDK
 (WITH TWO KEY)
 KRM-K-382WP-OSLTP-NDK+M
 (EACH LOCK WITH TWO KEY & MASTER KEY
 OPTION)



KRM-K-381WP-OSLTP-NDK(WITH ONE KEY)

KRM-K-381WP-OSLTP-NDK+M
 (EACH LOCK WITH ONE KEY & MASTER KEY OPTION)

BODY HEIGHT (A/A1)	BODY WIDTH (B)	BODY DEPTH (C/C1)	SHACKLE HEIGHT (D)	SHACLE WIDTH (E)	SHACKLE THICKNESS (F)
46 - 58 mm	39 mm	20 - 21 mm	38 mm(Regular)	20 mm	6 mm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



LOCKOUT/TAGOUT



KRM-K-382WP-OSLTP-NDK
(WITH TWO KEY)

KRM-K-382WP-OSLTP-N

DK+M (EACH LOCK WITH TWO KEY &
MASTER KEY OPTION)

**WEATHER/ WATER PROOF OSHA SAFETY LOCK TAG PADLOCK
38MM NYLON SHACKLE**

CE
Certified

Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.

- **KRM LOTO WEATHER/ WATER PROOF SAFETY PADLOCK** ---"seamless" lock structure durability- The new management key technology,- 10 level management.
- **Key Head in injection mold with same color of the lock.**
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title 29 Code of Federal Regulations(CFR)Part 1910.147
- High Quality with waterproof, corrosion resistant and strong adhesive.
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- **Key system:** DIFFER KEY, ALIKE KEY,
- **MASTER KEY (SET OF 100,200,500 PCS)**
- **Body material:** Glass fiber reinforced (composition of ABS+NYLON)
- **Shackle Material:** Nylon
- **Color:** Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- **Work temperature** 0° - 250° F (-20° - 120° C)
- Also "DO NOT REMOVE", permanently engraved on the lock.
- **Weight** – 100gm

Special fluorescent color available on volume basis.



ITEM CODE	BODY HEIGHT (A/A1)	BODY WIDTH (B)	BODY DEPTH (C/C1)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-38WP-OSLTP-NDK	46-58mm	39mm	20-21mm	38mm	20mm	6mm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269




www.locktagindia.com



KRM LOTO – WATER PROOF METAL PADLOCK

- Body Material – Waterproof plastic can effectively resist the dust, water and dirt Copper Lock core, dust and waterproof with heavy steel nickel.
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title 29 Code of Federal Regulations(CFR)Part 1910.147
- Shackle Material – Carbon steel shackle with anti cutting function, with higher security level.
- High Quality with waterproof, corrosion resistant.
- **Shackle Size** – Vertical 46 mm, Horizontal 20 mm and Diameter –7mm.
- **Body Size** – 40 mm x 49 mm x 31 mm.
- Waterproof and anti corrosive.
- **Color** – Red Black, Yellow Black and Orange Black.

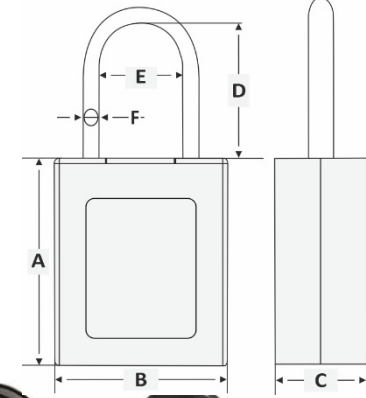

KRM-K-WPP

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACLE WIDTH (E)	SHACKLE THICKNESS (F)
40 mm	49 mm	31 mm	46 mm	20 mm	7 mm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com




Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com




WATERPROOF METAL PADLOCKS

CE
Certified



- **Body Material** – Waterproof plastic can effectively resist the dust, water and dirt Copper Lock core, dust and waterproof with heavy steel nickel.
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title **29 Code of Federal Regulations(CFR)Part 1910.147**
- **Shackle Material** – Carbon steel shackle with anti cutting function, with higher security level.
- High Quality with waterproof, corrosion resistant.
- **Shackle Size** – Vertical 46 mm, Horizontal 20 mm and Diameter –7mm.
- **Body Size** – 40 mm x 49 mm x 31 mm.
- Waterproof and anti corrosive.
- **Color** – Red Black, Yellow Black and Orange Black.



KRM-K-WPP

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
40mm	49mm	31mm	46mm	20mm	7mm

OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Productsto meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269www.lotoappliances.comEmail: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

SPECIAL FEATURE of OSHA Safety Lock Tag Padlock :

- High quality isolation lock as per isolation guidelines to meet OSHA requirement
- Key retained in unlock condition that means key would not come out .
- Key can be removed in only lock position.
- It is suitable for both low and high temperature.
- Particular key for particular lock.
- No key mixing with any other lock.
- Key mechanism- differ key , alike key , master key available on demand. The new management key technology – 6/10 level management.
- Each lock with specific numbering on body of lock and key.
- Special fluorescent color available on volume basis.
- Standard shackle, long shackle – Metal/ Dielectric shackle available
- Electric current resist from shackle to key, in case of dielectric shackle .
- Main advantage of nylon shackle , in case of emergency, shackle can be cut easily .



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockouttagouts.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT



SPECIAL FEATURE OF OSHA SAFETY LOCK TAG PADLOCKS

CE Certified

- High quality isolation padlock as per isolation guidelines to meet OSHA requirements
- Key retained in unlock condition that means key would not come out & the Key can be removed in only lock position.
- It is suitable for both **low and high temperature**.
- Particular key for particular padlock.
- No key mixing with any other lock.
- Key mechanism- differ key , alike key , master key available on demand. The new management key technology – **6/10 level** management.
- Each lock with specific numbering on body of lock and key.
- Special **fluorescent color** available on volume basis.
- Standard shackle, long shackle in **Metal/Dielectric shackle** available
- Electric current resist from shackle to key, in case of dielectric shackle .
- Main advantage of nylon shackle , in case of emergency, shackle can be cut easily.



KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KRM Safetech Private Limited

QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

info@krmcorporation.com, info@krmloto.com, krmloto@gmail.com, wadharajinder@gmail.com

M: 00 91 9810 291 381, 8800 544 881, T: 00 91 129 - 4021 381

Postal Add: 615, Sector-15A, Faridabad-121007 Haryana - NCR (INDIA)
Regd. Office: 1H/31A, N.I.T. Faridabad-121001

www.krmloto.com www.krmcorporation.com, www.safetyloto.com
www.lotoappliances.com, www.lockouttagouts.com



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Notes:

- Lock & Tag should be used with all loto products.
- For group locking on particular energy hasp should be used.
- Group lockout box should be used for group lockout tagout.
- Scissor Cable or Round cable lockout can be used to lock multiple hazardous energies instead putting individual locks & tags.