

GSTIN No.: 06AAPVW8746Q126,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockoutappliances.com



www.krmcorporation.com

www.lockouttagouts.com

www.krmloto.com

www.locktagindia.com

www.lotoappliances.com

KRM Corporation
Lockout Tagout



KRM Corporation
Electrical Safety
Products



KRM Corporation
TRAINING



KRM LOTO CIRCUIT BREAKER LOCKOUT



KRM Corporation
Parking & Road
Safety Products



KRM Corporation
Signage & Tapes



KRM Corporation
Other Products



GSTIN No.: 06AACPW8746Q126,
PAN No.: AACPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockoutappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

PIN TYPE CIRCUIT BREAKER LOCKOUT

Pin type circuit breaker lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the small hole of the MCB. Can be used for one, two, three or four pole circuit breaker, required no tools for installation and available as pin in, pin out and pin wide type.



**KRM LOTO – PIN TYPE CIRCUIT BREAKER LOCKOUT- INDEX****Index Page No:-3**

SR.NO	KRM LOTO PART CODE	PRODUCT NAME	WEIGHT (kg)	TECHNICAL PAGE NO.
1	KRM-K-PIN IN CBL	PIN IN CIRCUIT BREAKER LOCKOUT	0.01	5-6
2	KRM-K-PIN OUT CBL	PIN OUT CIRCUIT BREAKER LOCKOUT	0.01	7-8
3	KRM-K-PIN OUT WIDE CBL	PIN OUT WIDE CIRCUIT BREAKER LOCKOUT	0.01	9-10
4	KRM-K-PIN IN CBL-B-1	PIN IN CIRCUIT BREAKER LOCKOUT – BLUE	0.01	11-12
5	KRM-K-PIN OUT CBL-BL-1	PIN OUT CIRCUIT BREAKER LOCKOUT - BLACK	0.01	13-14
6	KRM-K-PIN OUT WIDE CBL-R-1	PIN OUT WIDE CIRCUIT BREAKER LOCKOUT - RED	0.01	15-16
7	KRM-K-MCBL-C-4	COMBO - PIN TYPE - Set of Pin Type including Pin IN, Pin Out, Pin Out Wide & Tie Bar - 4 Pics	0.060	17
8	KRM-K-MCBL-C-3	Combo of Mini Circuit breaker lockout- PIN TYPE having - 3 nos	0.030	18
1	KRM-K-MILD	KRM LOTO – MCB PIN LOTO DEVICE	0.014	19-20

**KRM LOTO – PIN TYPE CIRCUIT BREAKER LOCKOUT- INDEX****Index Page No:-4**

18	KRM-K-CBLTB-NT	Tie Block / Bar Circuit Breaker Lockout	0.030	21-22
9	KRM-K-PCBL-G3	Pin Circuit Breaker Lockout - Green	0.045	23-24
10	KRM-K-PCBL-Y3	Pin Circuit Breaker Lockout - Yellow	0.045	25-26
11	KRM-K-PCBL-B3	Pin Circuit Breaker Lockout - Blue	0.045	27-28
12	KRM-K-PCBL-B/G/Y	COMBO – PIN CIRCUIT BREAKER LOCKOUT - GREEN / BLUE / YELLOW	0.045	29-30
13	KRM-K-MMP-CBL-R-4	MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE – RED	0.020	31-32
14	KRM-K-MMP-CBL-G-4	MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE – GREEN	0.020	33-34
15	KRM-K-MMP-CBL-B-4	MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE – BLUE	0.020	35-36
16	KRM-K-MMP-CBL-Y-4	MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE – YELLOW	0.020	37-38
17	KRM-K-MMP-R/G/Y/B	MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE –RED/GREEN / BLUE / YELLOW	0.020	39-40




LOCKOUT/TAGOUT



CE Certified

PIN IN, PIN OUT, PIN WIDE CIRCUIT BREAKER LOCKOUT

- Material – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin In Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- Color – Green Black, Red Black, Yellow Black, Blue Black standard options are available or we can customized as per the quantity required.
- Dimension – Height 43 mm, Width 24 mm Depth 24 mm
- Weight – 7 gm



KRM-K-PIN IN CBL

KRM-K-PIN IN CBL-B-1



KRM-K-PIN OUT CBL

KRM-K-PIN OUT CBL-BL-1



KRM-K-PIN OUT-W-CBL

KRM-K-PIN OUT WIDE CBL-R-1

MODELS	HEIGHT (A)	WIDTH (B)	DEPTH (C)	PIN CLOSE POSITION	PIN OPEN POSITION	(E)
KRM-K-PIN IN CBL KRM-K-PIN IN CBL-B-1	43mm	24mm	24mm	15.5mm	18.5mm	1mm
KRM-K-PIN OUT CBL KRM-K-PIN OUT CBL-BL-1	43mm	24mm	24mm	20.7mm	18mm	1mm
KRM-K-PIN OUT-W-CBL KRM-K-PIN OUT WIDE CBL-R-1	43mm	24mm	24mm	26mm	22.5mm	1mm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



PIN OUT CIRCUIT BREAKER LOCKOUT KRM-K-PIN OUT CBL

- **Material** – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin Out Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- **Color** – Green Black, Red Black, Yellow Black, Blue Black standard options are available or we can customized as per the quantity required.
- **Dimension** – Height 43 mm, Width 24 mm Depth 24 mm
- **Weight** – 7 gm



KRM-K-PIN OUT CBL

MODELS	Height(A)	Width(B)	Depth(C)	Pin Close position	Pin Open position	(E)
KRM-K-PIN OUT CBL	43 mm	24 mm	24 mm	20.7 mm	18 mm	1 mm




LOCKOUT/TAGOUT



CE Certified

PIN IN, PIN OUT, PIN WIDE CIRCUIT BREAKER LOCKOUT

- Material – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin In Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- Color – Green Black, Red Black, Yellow Black, Blue Black standard options are available or we can customized as per the quantity required.
- Dimension – Height 43 mm, Width 24 mm Depth 24 mm
- Weight – 7 gm



KRM-K-PIN IN CBL

KRM-K-PIN IN CBL-B-1



KRM-K-PIN OUT CBL

KRM-K-PIN OUT CBL-BL-1



KRM-K-PIN OUT-W-CBL

KRM-K-PIN OUT WIDE CBL-R-1

MODELS	HEIGHT (A)	WIDTH (B)	DEPTH (C)	PIN CLOSE POSITION	PIN OPEN POSITION	(E)
KRM-K-PIN IN CBL KRM-K-PIN IN CBL-B-1	43mm	24mm	24mm	15.5mm	18.5mm	1mm
KRM-K-PIN OUT CBL KRM-K-PIN OUT CBL-BL-1	43mm	24mm	24mm	20.7mm	18mm	1mm
KRM-K-PIN OUT-W-CBL KRM-K-PIN OUT WIDE CBL-R-1	43mm	24mm	24mm	26mm	22.5mm	1mm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com


Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

PIN OUT WIDE CIRCUIT BREAKER LOCKOUT KRM-K-PIN OUT WIDE CBL

- **Material** – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin Out Wide Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- **Color** – Green Black, Red Black, Yellow Black, Blue Black standard options are available or we can customized as per the quantity required.
- **Dimension** – Height 43 mm, Width 24 mm Depth 24 mm
- **Weight** – 7 gm

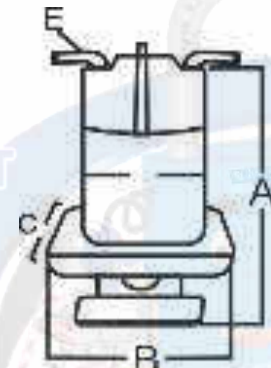

KRM-K-PIN OUT-W-CBL

MODELS	Height(A)	Width(B)	Depth(C)	Pin Close position	Pin Open position	(E)
KRM-K-PIN OUT –W- CBL	43 mm	24 mm	24 mm	26 mm	22.5 mm	1 mm




LOCKOUT/TAGOUT



CE Certified

PIN IN, PIN OUT, PIN WIDE CIRCUIT BREAKER LOCKOUT

- Material – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin In Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- Color – Green Black, Red Black, Yellow Black, Blue Black standard options are available or we can customized as per the quantity required.
- Dimension – Height 43 mm, Width 24 mm Depth 24 mm
- Weight – 7 gm



MODELS	HEIGHT (A)	WIDTH (B)	DEPTH (C)	PIN CLOSE POSITION	PIN OPEN POSITION	(E)
KRM-K-PIN IN CBL KRM-K-PIN IN CBL-B-1	43mm	24mm	24mm	15.5mm	18.5mm	1mm
KRM-K-PIN OUT CBL KRM-K-PIN OUT CBL-BL-1	43mm	24mm	24mm	20.7mm	18mm	1mm
KRM-K-PIN OUT-W-CBL KRM-K-PIN OUT WIDE CBL-R-1	43mm	24mm	24mm	26mm	22.5mm	1mm

KRM CORPORATION
ISO 9001:2015, ISO 9001:2015, ISO 9001:2015, ISO 9001:2015
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO 9001:2015

M: 00 91 9810 291 381, 8800 544 881, T: 00 91 129 - 4021 381

info@krmcorporation.com, info@krmlo.com, krmlo@gmail.com, wadhwarajinder@gmail.com

Postal Add: 615, Sector-15A, Faridabad-121007 Haryana - NCR (INDIA)
Regd. Office: 1H/31A, N.I.T. Faridabad-121001

www.krmlo.com www.krmcorporation.com, www.safetyloto.com
www.lootoappliances.com, www.lockouttagouts.com



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269




www.lockoutappliances.com



PIN IN CIRCUIT BREAKER LOCKOUT – BLUE KRM-K-PIN IN CBL-B-1

- **Material** – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin In Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- **Color** – Blue Black & standard options are available or we can customized as per the quantity required.
- **Dimension** – Height 43 mm, Width 24 mm Depth 24 mm
- **Weight** – 7 gm

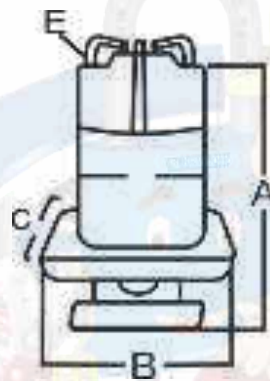

KRM-K-PIN IN CBL-B-1

MODELS	Height(A)	Width(B)	Depth(C)	Pin Close position	Pin Open position	(E)
KRM-K-PIN IN CBL	43 mm	24 mm	24 mm	15.5 mm	18.5 mm	1 mm




LOCKOUT/TAGOUT



CE Certified

PIN IN, PIN OUT, PIN WIDE CIRCUIT BREAKER LOCKOUT

- Material – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin In Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- Color – Green Black, Red Black, Yellow Black, Blue Black standard options are available or we can customized as per the quantity required.
- Dimension – Height 43 mm, Width 24 mm Depth 24 mm
- Weight – 7 gm



KRM-K-PIN IN CBL

KRM-K-PIN IN CBL-B-1



KRM-K-PIN OUT CBL

KRM-K-PIN OUT CBL-BL-1



KRM-K-PIN OUT-W-CBL

KRM-K-PIN OUT WIDE CBL-R-1

MODELS	HEIGHT (A)	WIDTH (B)	DEPTH (C)	PIN CLOSE POSITION	PIN OPEN POSITION	(E)
KRM-K-PIN IN CBL KRM-K-PIN IN CBL-B-1	43mm	24mm	24mm	15.5mm	18.5mm	1mm
KRM-K-PIN OUT CBL KRM-K-PIN OUT CBL-BL-1	43mm	24mm	24mm	20.7mm	18mm	1mm
KRM-K-PIN OUT-W-CBL KRM-K-PIN OUT WIDE CBL-R-1	43mm	24mm	24mm	26mm	22.5mm	1mm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lockoutappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



PIN OUT CIRCUIT BREAKER LOCKOUT KRM-K-PIN OUT CBL-BL-1

- **Material** – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin Out Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- **Color** – Red Black & standard options are available or we can customized as per the quantity required.
- **Dimension** – Height 43 mm, Width 24 mm Depth 24 mm
- **Weight** – 7 gm



KRM-K-PIN OUT CBL-BL-1

MODELS	Height(A)	Width(B)	Depth(C)	Pin Close position	Pin Open position	(E)
KRM-K-PIN OUT CBL	43 mm	24 mm	24 mm	20.7 mm	18 mm	1 mm




LOCKOUT/TAGOUT



CE Certified

PIN IN, PIN OUT, PIN WIDE CIRCUIT BREAKER LOCKOUT

- Material – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin In Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- Color – Green Black, Red Black, Yellow Black, Blue Black standard options are available or we can customized as per the quantity required.
- Dimension – Height 43 mm, Width 24 mm Depth 24 mm
- Weight – 7 gm



KRM-K-PIN IN CBL

KRM-K-PIN IN CBL-B-1



KRM-K-PIN OUT CBL

KRM-K-PIN OUT CBL-BL-1



KRM-K-PIN OUT-W-CBL

KRM-K-PIN OUT WIDE CBL-R-1

MODELS	HEIGHT (A)	WIDTH (B)	DEPTH (C)	PIN CLOSE POSITION	PIN OPEN POSITION	(E)
KRM-K-PIN IN CBL KRM-K-PIN IN CBL-B-1	43mm	24mm	24mm	15.5mm	18.5mm	1mm
KRM-K-PIN OUT CBL KRM-K-PIN OUT CBL-BL-1	43mm	24mm	24mm	20.7mm	18mm	1mm
KRM-K-PIN OUT-W-CBL KRM-K-PIN OUT WIDE CBL-R-1	43mm	24mm	24mm	26mm	22.5mm	1mm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269




www.lotoappliances.com



PIN OUT WIDE CIRCUIT BREAKER LOCKOUT – KRM-K-PIN OUT WIDE CBL-R-1

- **Material** – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin Out Wide Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- **Color** – Red Black & standard options are available or we can customized as per the quantity required.
- **Dimension** – Height 43 mm, Width 24 mm Depth 24 mm
- **Weight** – 7 gm

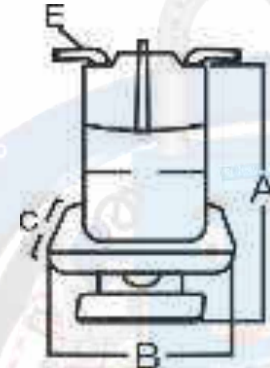

KRM-K-PIN OUT WIDE CBL-R-1

MODELS	Height(A)	Width(B)	Depth(C)	Pin Close position	Pin Open position	(E)
KRM-K-PIN IN CBL	43 mm	24 mm	24 mm	15.5 mm	18.5 mm	1 mm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Email: info@krmlo.com, info@krmcorporation.com, krmlo@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



www.locktagindia.com




LOCKOUT/TAGOUT



CE Certified

PIN IN, PIN OUT, PIN WIDE CIRCUIT BREAKER LOCKOUT

- Material – Nylon, ABS/PP Metallic PIN and Spring
- KRM Pin In Circuit Breaker Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device can be installed directly without the assistance of any extra tool, having high tensile strength and is suitable for single, double, triple and four pole circuit breaker.
- Length of Pin can be expanded up to 8.5 mm on pressing the back side with the help of thumb.
- Color – Green Black, Red Black, Yellow Black, Blue Black standard options are available or we can customized as per the quantity required.
- Dimension – Height 43 mm, Width 24 mm Depth 24 mm
- Weight – 7 gm



MODELS	HEIGHT (A)	WIDTH (B)	DEPTH (C)	PIN CLOSE POSITION	PIN OPEN POSITION	(E)
KRM-K-PIN IN CBL KRM-K-PIN IN CBL-B-1	43mm	24mm	24mm	15.5mm	18.5mm	1mm
KRM-K-PIN OUT CBL KRM-K-PIN OUT CBL-BL-1	43mm	24mm	24mm	20.7mm	18mm	1mm
KRM-K-PIN OUT-W-CBL KRM-K-PIN OUT WIDE CBL-R-1	43mm	24mm	24mm	26mm	22.5mm	1mm

KRM CORPORATION
ISO 9001:2015, ISO 9001:2015, ISO 9001:2015, ISO 9001:2015
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO 9001:2015

M: 00 91 9810 291 381, 8800 544 881, T: 00 91 129 - 4021 381

info@krmcorporation.com, info@krmlo.com, krmlo@gmail.com, wadhwarajinder@gmail.com

Postal Add: 615, Sector-15A, Faridabad-121007 Haryana - NCR (INDIA)
Regd. Office: 1H/31A, N.I.T. Faridabad-121001

www.krmlo.com www.krmcorporation.com, www.safetyloto.com
www.lotoappliances.com, www.lockouttagouts.com

GSTIN No.: 06AAMPW8746Q126, PAN No.: AAVPW8746Q, TIN No.: 06821328889, TAN no.: RTKKO3359G, IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269



GSTIN No.: 06AAECK2831L1Z1, PAN No.: AAECK2831L, TIN No.: 06824000112, CIN No.: U31903HR2011PTC042508, IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

COMBO – PIN TYPE CIRCUIT BREAKER LOCKOUT – KRM-K-MCBL-C-4

Combo for Pin Type Circuit Breaker Lockout includes Pin In Circuit Breaker Lockout, Pin Out Circuit Breaker Lockout, Pin Out Wide Circuit Breaker Lockout and Tie Bar / Blocker Circuit Breaker Lockout.



KRM-K-MCBL-C-4

GSTIN No.: 06AAVPW8746Q126,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



GSTIN No.: 06AAECK2831L12I
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

COMBO – PIN TYPE CIRCUIT BREAKER LOCKOUT – KRM-K-MCBL-C-3

Combo for Pin Type Circuit Breaker Lockout includes Pin In Circuit Breaker Lockout, Pin Out Circuit Breaker Lockout and Pin Out Wide Circuit Breaker Lockout.



KRM-K-MCBL-C-3



LOCKOUT/TAGOUT



MCB PIN LOTO DEVICE

CE Certified

Pin type circuit breaker lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for single pole circuit breaker, required no tools for installation.



KRM-K-MILD



- Material – Nylon, ABS, Metallic PIN and Spring
- KRM MCB Pin Lockout is applicable on the circuit breakers for energy isolation, always used when energy source is in switched OFF condition.
- The device with wire clips will move into position so as to adjust behind the toggle of the circuit breaker. As the device will fit on to the circuit then can lock using the padlock.
- The lockout can take padlock with a hole dia 8mm
- Suitable for small sized circuit breaker.
- Color – Yellow, Red or as per the quantity required.
- Weight – 7 gm

MODELS	A	B	C	Hole Dia	Pin Thickness
KRM-K-MILD	18mm	26.5mm	36.5mm	8mm	1mm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Email: info@krmlooto.com, info@krmcorporation.com, krmlooto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



www.lootoappliances.com



www.lootoappliances.com

LOCKOUT/TAGOUT



TIE BLOCK / BAR CIRCUIT BREAKER LOCKOUT

CE Certified



KRM-K-CBLTB-NT

- Material – ABS with metallic threaded bolt and steel strip
- KRM Tie Block Or Bar Circuit Breaker Lockout is easy to fix tightly by the use of adjustable upper thumb Wheel operation that is suitable for single pole circuit breaker.
- Max. 2 Padlocks are Inserted with ≥ 7.5 mm Padlock Shackle Dia.
- Color – Standard color Red and Blue or any color as per the required quantity.
- Dimension – Height 54 mm, Width 26 mm, Depth 14 mm Hole diameter 7.5 mm
- Weight – 30 gm



MODELS	HEIGHT	WIDTH	DEPTH	HOLE DIA	WEIGHT
KRM-K-CBLTB-NT	54mm	26mm	14mm	7.5mm	30gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockouttagouts.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

LOCKOUT/TAGOUT



SLIDE PIN TYPE CIRCUIT BREAKER LOCKOUT

CE Certified



KRM-K-PCBL



KRM-K-PCBL-Y3



KRM-K-PCBL-G3



KRM-K-PCBL-B3

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic PIN.
- KRM MCB Lockout molded pin type is suitable for single pole it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Green, Blue, Yellow, Red or any color as per any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 45 gm.

MODELS	HEIGHT	WIDTH	Depth	HOLE DIA	WEIGHT
KRM-K-PCBL-B/G/Y	63.3mm	23.3mm	14mm	9mm	20gm

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

PIN CIRCUIT BREAKER LOCKOUT - YELLOW (SET OF 3) – KRM-K-PCBL-Y3

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the small hole of the MCB. Can be used for two, three or four pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material** - Nylon with metallic PIN.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color** - Green, Blue, Yellow, Red or any color as per any color as per volume.
- Dimension** - Outer size - 63.3 mm length, 23.3 mm width, 14 mm.
- Weight** - 45 gm



MODELS	OUTER LENGTH	WIDTH	HEIGHT	HOLE DIAMETER	WEIGHT
KRM-K-PCBL-Y3	63.3 mm	23.3 mm	14 mm	9 mm	20 gm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



www.locktagindia.com



LOCKOUT/TAGOUT



SLIDE PIN TYPE CIRCUIT BREAKER LOCKOUT

CE Certified



KRM-K-PCBL



KRM-K-PCBL-Y3



KRM-K-PCBL-G3



KRM-K-PCBL-B3

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic PIN.
- KRM MCB Lockout molded pin type is suitable for single pole it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Green, Blue, Yellow, Red or any color as per any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 45 gm.

MODELS	HEIGHT	WIDTH	Depth	HOLE DIA	WEIGHT
KRM-K-PCBL-B/G/Y	63.3mm	23.3mm	14mm	9mm	20gm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



www.locktagindia.com



LOCKOUT/TAGOUT



SLIDE PIN TYPE CIRCUIT BREAKER LOCKOUT

CE Certified



KRM-K-PCBL



KRM-K-PCBL-Y3



KRM-K-PCBL-G3



KRM-K-PCBL-B3

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic PIN.
- KRM MCB Lockout molded pin type is suitable for single pole it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Green, Blue, Yellow, Red or any color as per any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 45 gm.

MODELS	HEIGHT	WIDTH	Depth	HOLE DIA	WEIGHT
KRM-K-PCBL-B/G/Y	63.3mm	23.3mm	14mm	9mm	20gm

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lockoutappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

COMBO – PIN CIRCUIT BREAKER LOCKOUT - GREEN / BLUE / YELLOW (SET OF 3)

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the small hole of the MCB. Can be used for two, three or four pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic PIN.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Green, Blue, Yellow, Red or any color as per any color as per volume.
- Dimension - Outer size - 63.3 mm length, 23.3 mm width, 14 mm.
- Weight - 45 gm.



MODELS	OUTER LENGTH	WIDTH	HIEGHT	HOLE DIAMETER	WEIGHT
KRM-K-PCBL-B/G/Y	63.3 mm	23.3 mm	14 mm	9 mm	20 gm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



www.locktagindia.com



LOCKOUT/TAGOUT



SLIDE PIN TYPE CIRCUIT BREAKER LOCKOUT

CE Certified



KRM-K-PCBL



KRM-K-PCBL-Y3



KRM-K-PCBL-G3



KRM-K-PCBL-B3

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic PIN.
- KRM MCB Lockout molded pin type is suitable for single pole it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Green, Blue, Yellow, Red or any color as per any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 45 gm.

MODELS	HEIGHT	WIDTH	Depth	HOLE DIA	WEIGHT
KRM-K-PCBL-B/G/Y	63.3mm	23.3mm	14mm	9mm	20gm

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockoutappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

www.krmcorporation.com

www.lockouttagouts.com

www.krmloto.com

www.locktagindia.com

www.lotoappliances.com

MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE – RED – KRM-K-MMP-CBL-R4

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the small hole of the MCB. Can be used for two, three or four pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material** - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color** - Red, Blue, Green, Yellow or any color as per volume.
- Dimension** - Outer size 63.3 mm length, 23.3 mm width, 14 mm height.
- Weight** - 20 gm



MODELS	OUTER LENGTH	WIDTH	HIEGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-CBL-R-4	63.3 mm	23.3 mm	14 mm	9 mm	20 gm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269



www.lockouttagouts.com



www.locktagindia.com

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT



MINIATURE CIRCUIT BREAKER LOCKOUT MOLDED PIN TYPE



- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for Single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Yellow, Blue, Red, or Green any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 20 gm

MODELS	OUTER LENGTH	WIDTH	HEIGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-R/Y/B/G	63.3mm	23.3mm	14mm	9mm	20gm

KRM CORPORATION

ISO 9001:2015, ISO 9001:2015, ISO 9001:2015, ISO 9001:2015 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KM Safetech Private Limited

QUALITY MANAGEMENT SYSTEM ISO 9001:2015

M: 00 91 9810 291 381, 8800 544 881, T: 00 91 129 - 4021 381

info@krmcorporation.com, info@krmloto.com, krmloto@gmail.com, wadhwarajinder@gmail.com

Postal Add: 615, Sector-15A, Faridabad-121007 Haryana - NCR (INDIA)

www.krmloto.com | www.krmcorporation.com, www.safetyloto.com | www.lotoappliances.com, www.lockouttagouts.com



GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE – GREEN – KRM-K-MMP-CBL-G4

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the small hole of the MCB. Can be used for two, three or four pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material** - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color** – Green, Blue, Red, Yellow or any color as per volume.
- Dimension** - Outer size 63.3 mm length, 23.3 mm width, 14 mm height.
- Weight** - 20 gm



MODELS	OUTER LENGTH	WIDTH	HIEGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-CBL-G-4	63.3 mm	23.3 mm	14 mm	9 mm	20 gm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



www.locktagindia.com



LOCKOUT/TAGOUT



MINIATURE CIRCUIT BREAKER LOCKOUT MOLDED PIN TYPE



KRM-K-MMP-CBL-R1



KRM-K-MMP-CBL-B1



KRM-K-MMP-CBL-Y1



KRM-K-MMP-CBL-G1

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for Single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Yellow, Blue, Red, or Green any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 20 gm

MODELS	OUTER LENGTH	WIDTH	HEIGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-R/Y/B/G	63.3mm	23.3mm	14mm	9mm	20gm

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockouttagouts.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE – BLUE – KRM-K-MMP-CBL-B4

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the small hole of the MCB. Can be used for two, three or four pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material** - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color** - Blue, Red, Green, Yellow or any color as per volume.
- Dimension** - Outer size 63.3 mm length, 23.3 mm width, 14 mm height.
- Weight** - 20 gm



MODELS	OUTER LENGTH	WIDTH	HIEGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-CBL-B-4	63.3 mm	23.3 mm	14 mm	9 mm	20 gm



OEM Manufacturer & Global Supplier of Lockout Tagout & Safety Products

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269



www.lockouttagouts.com



www.locktagindia.com

LOCKOUT/TAGOUT



MINIATURE CIRCUIT BREAKER LOCKOUT MOLDED PIN TYPE



- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for Single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Yellow, Blue, Red, or Green any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 20 gm

MODELS	OUTER LENGTH	WIDTH	HEIGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-R/Y/B/G	63.3mm	23.3mm	14mm	9mm	20gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockoutappliances.com



LOCKOUT/TAGOUT



MINIATURE CIRCUIT BREAKER LOCKOUT MOLDED PIN TYPE



- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for Single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Yellow, Blue, Red, or Green any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 20 gm

MODELS	OUTER LENGTH	WIDTH	HEIGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-R/Y/B/G	63.3mm	23.3mm	14mm	9mm	20gm

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com

www.lockouttagouts.com

www.krmloto.com

www.locktagindia.com

www.lotoappliances.com

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

MINIATURE CIRCUIT BREAKER LOCKOUT MOULDED PIN TYPE – KRM-K-MMP-R/G/Y/B

- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the small hole of the MCB. Can be used for two, three or four pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material** - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color** – Yellow, Blue, Red, or Green any color as per volume.
- Dimension** - Outer size 63.3 mm length, 23.3 mm width, 14 mm height.
- Weight** - 20 gm



MODELS	OUTER LENGTH	WIDTH	HIEGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-R/G/Y/B	63.3 mm	23.3 mm	14 mm	9 mm	20 gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockoutappliances.com



LOCKOUT/TAGOUT



MINIATURE CIRCUIT BREAKER LOCKOUT MOLDED PIN TYPE



- Pin Type Circuit Breaker Lockout device is used to provide locking to the miniature circuit breaker that is with appropriate small holes, squeeze from the back to open the jaws of the lockout device and then fix or lock it properly in the hole of the MCB. Can be used for Single pole circuit breaker, required no tools for installation and available as Pin In, pin Out and wide type.
- Material - Nylon with metallic pin.
- KRM MCB Lockout molded pin type is suitable for single, double, triple and four pole circuit breaker, it is easy to use and offer a flawless lockout solution, with the pin having high tensile steel grade strength.
- Color - Yellow, Blue, Red, or Green any color as per volume.
- Dimension - Height- 63.3 mm Width - 23.3 mm Depth - 14 mm.
- Weight - 20 gm

MODELS	OUTER LENGTH	WIDTH	HEIGHT	HOLE DIAMETER	WEIGHT
KRM-K-MMP-R/Y/B/G	63.3mm	23.3mm	14mm	9mm	20gm

KRM LOTO

KRM CORPORATION

Gurgaon - 122 015, NO. 14B, SECTOR 29, Gurgaon, Haryana 122 015
1st Floor, DLF Cyber City, Sector 29, Gurgaon, Haryana 122 015

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



KRM

KRM LOTO

Lock Tag!

safe loto

K&M Safetech Private Limited

SAFETY MANAGEMENT SYSTEMS AND EQUIPMENTS

OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



For more details
login our website.

For more details on LOTO and Safety Products visit our website – www.krmloto.com
<https://krmloto.com/download/KRM-LOTO-CIRCUIT-BREAKER-LOCKOUT.pdf>

www.krmcorporation.com | www.krmloto.com | www.safetyloto.com | www.lockouttagouts.com | www.locktagindia.com

GSTIN No.: 06AAVPW8746Q126,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lockouttagouts.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

Notes:

- Lock & Tag should be used with all loto products.
- For group locking on particular energy hasp should be used.
- Group lockout box should be used for group lockout tagout.
- Scissor Cable or Round cable lockout can be used to lock multiple hazardous energies instead putting individual locks & tags.