

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

Practice Proper KRM Lockout / Tagout Procedures

www.krmcorporation.com



- Know the steps for applying and releasing lockout/tagout devices
- Understand authorized and effected employees' roles
- Review lockout/tagout procedures annually

BETTER TO LOCK - OUT THAN LUCK OUT

Audit

Training

Survey

Services

LOCKOUT/TAGOUT

KRM-LOTO

SAFETY PRODUCTS

LOCKOUT TAGOUT KIT

CONTROL YOUR HAZARDOUS ENERGY

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

World Largest Leading Brand



To Meet OSHA Lockout Tagout Standard 29 CFR, 1910.147&1910.269

in Lockout/Tagout & Safety Products



OEM MANUFACTURER & GLOBAL SUPPLIER



Worldwide Delivery



24*7 Support



Instant LO/TO Solution



Quickest Delivery

www.krmloto.com
www.krmcorporation.com

info@krmloto.com
info@krmcorporation.com

AUDIT | TRAINING | SURVEY | SERVICES



+91 98 1029 1381, +91 8800 544 881

rajinderwadhwa

+91 129 402 1381, 413 1381



KRM CORPORATION
ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

What is lockout / tagout?

Lockout – To isolate the Energy

Tagout – To put some identification on the particular Energy

Why Lock Out/Tagout :-

Most industrial accidents are caused by the unexpected energisation of machines by the uncontrolled release of energy. To prevent needless death, serious injuries and to perform service and maintenance works on industrial equipment safely.

OSHA's Lock out / Tag out standard:-

- **29 CFR (Code of Federal Regulation) USA**
- **1910.147 & 1910.269**

KRM CORPORATION
ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Types of Hazardous Energy

Electrical – power-based (power equipment)



Thermal – heat-based (ovens, freezers, Moving parts, Friction)

Mechanical – movement-based (heavy machines)

Hydraulic – compressed fluid-based (pumps, lathes)

Pneumatic – compressed air- or gas-based (pumps)

Potential – based on configuration, force fields or properties (coils, springs, elastic bands)

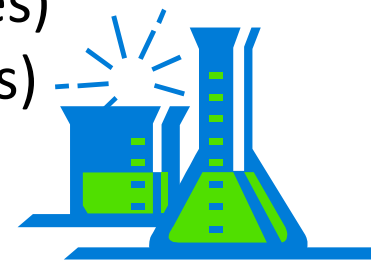

KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



Lock Tag!!

safe loto



www.lotoappliances.com



to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

KRM LOTO LOCKOUT / TAGOUT

LOTO MAPPING

KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com


safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

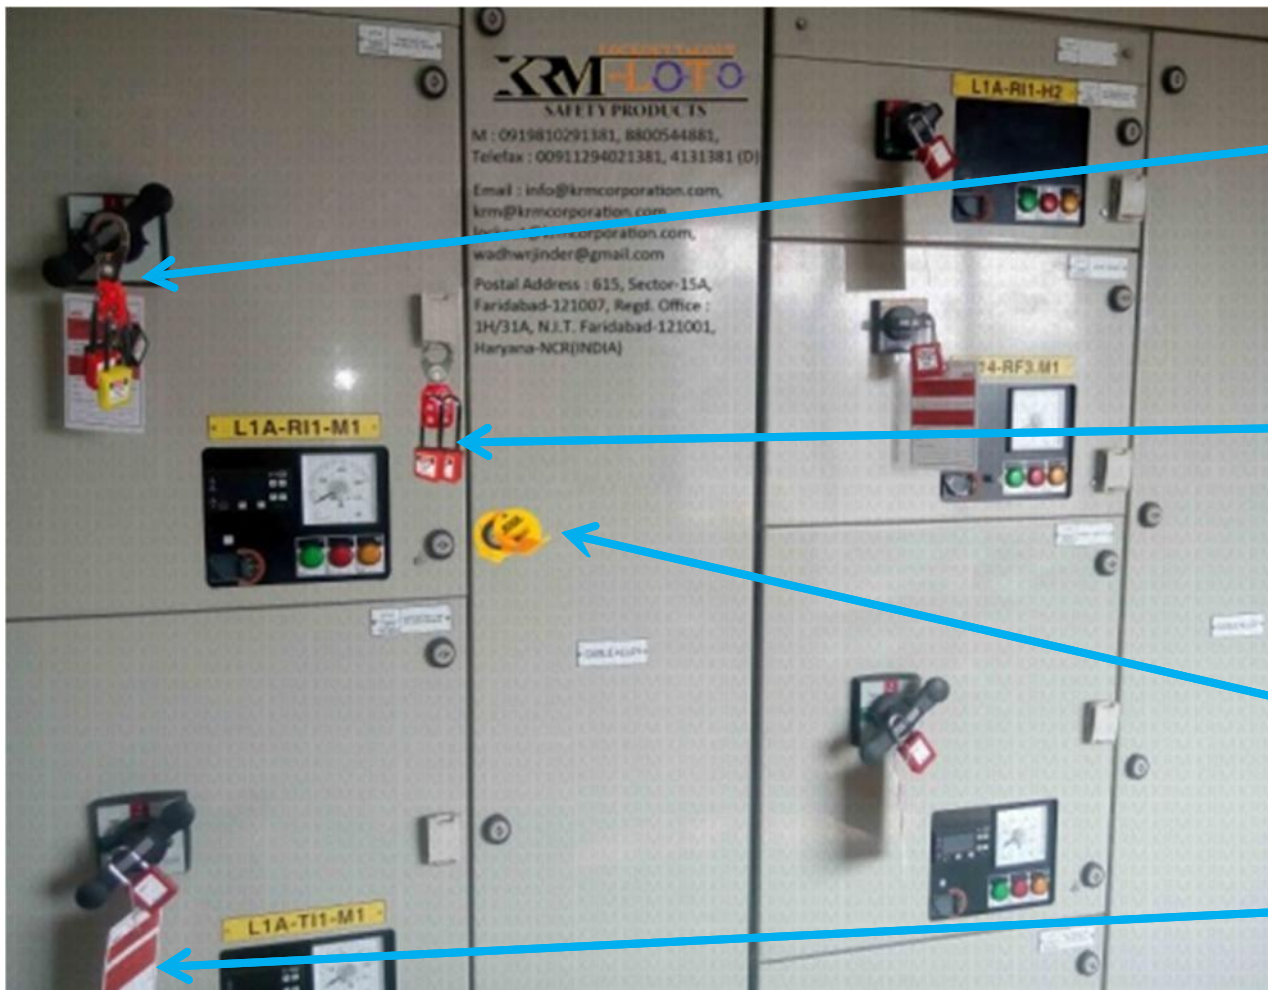

Vinyl/molded coated lockout hasp
Model no.-KRM-K-VCH-S25(jaw dia-25mm)

OSHA safety padlocks
(metal /nylon shackle)
Model no.-KRM-K-LSPL-DK,
DE-DK

Round Shape Di-Electric
Lockout Device. To lock the
door panels..
KRM-K-RSDEL

Do not operate tag
Model no.-KRM-K-LT-2C



Induction Furnace Panel

**Multipurpose Vinyl / Molded Coated Hasp
 KRM-K-VCH-S-25**



KRM CORPORATION
OSHAS 19001:2007 & BS EN ISO 9001:2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

MULTIPURPOSE VINYL / MOLDED COATED HASP

CE Certified

- KRM LOTO Vinyl coated Hasp for Group Locking purpose With 6 holes
- Lower Part : Di- Energize insulated Grip Available in Small & Premier Size
- Material : Hardened Metallic steel with coating.
- Hasp dia : 38/39mm, 25mm
- Outer Length:113mm
- Weight:91gms

KRM-K-VCH-38/39 **KRM-K-VCH-25**

DIMENSIONS					
ITEM CODE	OUTER TENTH (A)	Jaw Size Dia (B)	Padlock HoleDia (C)	No.Of Holes	WEIGHT
KRM-K-VCH-P-38/39	113mm	38mm	10mm	6	91gms
KRM-K-VCH-S-25	113mm	25mm	10mm	6	91gms

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com



KRM-K-LTLH-M-10
Labelled hasp with 10 holes -
Powder coated metal base sheet



KRM-K-LSPL-DK
Safety Isolation
Padlocks - With
differ key –
Multiple Colours

And



KRM-K-LT-2C
Lockout Tags - 2 colours printing (set
of 10) size - 80 mm x 144 mm in
straight and 77 x 138 mm in cut
shape



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



Induction Furnace Panel



**Round Shape Di-Electric Lockout Device
 KRM-K-RSDEL**

LOCKOUT/TAGOUT CE Certified
KRM-LOTO
 SAFETY PRODUCTS INDIA
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147 & 1910.269

Round Shape Di-Electric Lockout Device

- **Material** – Body made of ABS, attached with rivet
- Round Shape Di-Electric Lockout device is used to lock the racking in-out point of Air circuit breaker and vacuumed circuit breaker so that no-one can operate the particular device, also can lock some sort of switches that are inserted inside a plane surface.
- Made by riveting two pieces which can be easily rotated in any direction having three holes at bottom part to fix with the screw and also can be stuck with the strong double sided pre-adhesive on requirement for locking purpose.
- **Dimension** – Outer Diameter is 46 mm, Inner Diameter is 32 mm, lower cover circle side thickness is 7 mm, overall thickness is 8 mm with upper part thickness 3mm and lower part thickness is 5 mm, locking hole diameter 7 mm.
- **Color** – Standard Color Yellow
- **Weight** – 20 gm

KRM-K-RSDEL

MODELS	OUTER DIAMETER	INNER DIAMETER	CIRCLE SIDE THICKNESS	OVERALL THICKNESS	LOWER THICKNESS	WEIGHT
KRM-K-RSDEL	46mm	32mm	07mm	18mm	07mm	20gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com



www.lotoappliances.com



Round Shape Di-Electric Lockout Device
KRM-K-RSDEL



KRM LOTO
SAFETY PRODUCTS INDIA
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147 & 1910.269

LOCKOUT/TAGOUT CC Certified

Round Shape Di-Electric Lockout Device

- **Material** – Body made of ABS, attached with rivet
- Round Shape Di-Electric Lockout device is used to lock the racking in-out point of Air circuit breaker and vacuumed circuit breaker so that no-one can operate the particular device, also can lock some sort of switches that are inserted inside a plane surface.
- Made by riveting two pieces which can be easily rotated in any direction having three holes at bottom part to fix with the screw and also can be stuck with the strong double sided pre-adhesive on requirement for locking purpose.
- **Dimension** – Outer Diameter is 46 mm, Inner Diameter is 32 mm, lower cover circle side thickness is 7 mm, overall thickness is 8 mm with upper part thickness 3mm and lower part thickness is 5 mm, locking hole diameter 7 mm.
- **Color** – Standard Color Yellow
- **Weight** – 20 gm

KRM-K-RSDEL

MODELS	OUTER DIAMETER	INNER DIAMETER	CIRCLE SIDE THICKNESS	OVERALL THICKNESS	LOWER THICKNESS	WEIGHT
KRM-K-RSDEL	46mm	32mm	07mm	18mm	07mm	20gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
Email: info@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com



KRM CORPORATION
ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Circuit Breaker Lockout Rail Kit KRM-K-BLK



KRM-LOTO
SAFETY PRODUCTS
KRM CORPORATION
OHSAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269



KRM-K-BLK

Circuit Breaker Lockout Rail Kit

CE Certified

For providing protection to different Energy sources for group isolation when multiple authorized employees need to lockout the same energy source at a time to meet Osha's Lockout/Tagout Standard, 29 CFR & 1910.147 & 1910.269

Material – ABS

KRM Lockout Breaker Kit's body is in two parts, available with two rails and two blocking bars in which rails are available with pre – adhesive and small holes for drilling to install the device.

Device is having two locking rails and two blocking arms.

It can be installed in electrical panel Or circuit breaker directly, for lockout purpose SIX holes are available.

This Lockout device is suitable for 480 V to 600 V.

Size – Blocking Bar/Arm is of length 8"

Blocking Bar/Arm is available in two different color option green color indicates Locked 'OFF' situation and Red color indicates Locked 'ON' situation.

Color – Blocking Bar is of Red and Green color alternatives and Locking rails is of yellow color.

Weight – 75 gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com



Induction Furnace Panel



**Transparent Emergency Small Switch/Push Button Lockout
 KRM-K-EPL-S**

TRANSPARENT EMERGENCY SMALL SWITCH/PUSH BUTTON LOCKOUT CE
Certified Products

KRM CORPORATION
OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Emergency switch or push button lockout device is used to protect the emergency stop button to prevent uncertain condition caused by human error which is totally safe from any energy source.

- Material – Strong Polycarbonate body
- Emergency Push Button Lockout Multi devices is suitable for almost all the square lock switches and can be install by pressing and fixing with screw.
- Two holes for locking is provided and provision of hole in base part is also available.
- Color – Transparent glass
- Outer square base – 66 X 66 mm
- Inner base size – 45 X 45 mm
- Upper part of internal size – 50 X 50 mm
- Depth – 56 mm
- Weight – 58 gm

MODELS	A	B	C	D	E
KRM-K-EPL-S	51mm	60mm	57mm	66mm	66mm
KRM-K-EPL-M	51mm	60mm	57mm	66mm	66mm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: info@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



Cloning Furnace Panel

KRM-K-EPL-S

Emergency Switch/Push Button Lockout KRM-K-MPBL-S-R

KRM CORPORATION
OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KRM-K-MPBL-S-R

EMERGENCY SWITCH/PUSH BUTTON LOCKOUT

Emergency switch or push button lockout device is used to protect the emergency stop button to prevent uncertain condition caused by human error.

- Material** – Polypropylene material with identification label
- KRM LOTO Mushroom Push button/Emergency switch Lockout is designed to fits over the button and prevent it by accidental operation,
- Three holes** are available for locking and tagging the device and no extra tool is required for installation.
- Color** – Milky Transparent /Red color
- Outer Size** – 80 mm X 40.5 mm
- Inner size** – 70 mm X 30.50 mm
- Weight** – 56 gm

MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	VALVE HANDLE (SIZE)	NUMBER OF HOLES
KRM-K-MPBL-S-R	66mm	36mm	80mm	41mm	9mm	1"-2.5" 25-63.5mm	3

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Transparent Emergency Small Switch/Push Button Lockout



Lock Tag!!



safe loto



**Universal Circuit Breaker Lockout
 KRM-K-UCBL-R-NSS**



Universal Circuit Breaker Lockout

CE Certified Products

Universal circuit breaker lockout is a versatile device fits on wide range of single, double, triple and four pole of electrical circuit breaker can be accommodates up to one lock and with the help of hasp lockout device can be used for group isolation.

- Material** – High quality ABS with metallic nut
- KRM Universal Circuit Breaker Lockouts will lockout most type of breaker's lever. One size fits in all type of circuit breakers having **nose or without nose** for better gripping which is UV resistant and suitable for single, double, triple and four pole circuit breaker can be locked with single **padlock and lockout hasp for group locking purposes**.
- This is basically providing a complete solution of circuit breaker safety, in which each product is different from other one includes with nose, without nose, normal screw, foldable screw.
- Specialty of this lockout is that folding screw is there so that no extra tool required to tighten the screw on the device.
- Color** – Red, Yellow, Green and Blue Or any color make as per the required quantity.
- Size** – length 56 mm, width 26 mm, thickness 19 mm, outer Thickness at locking end 11 mm, locking Hole diameter 9 mm, average Centre internal Grip 13.5 m, Average centre internal Grip 13.5 mm
- Weight** – 72 gm for KRM-K-UCBL-R22 and 52 gm for KRM-K-UCBL-R-4

MODELS	A	B	C	D	E	F
KRM-K-UCBL-R-P-SS	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-P1	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-N-SS	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-N1	56mm	40mm	26mm	9mm	11mm	19mm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-

KRM-K-OSLTP-C-MDK

OR

KRM-K-OSLTP-C-NDK

Do not operate tag

Model no.-KRM-K-LT-2C

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

**Butter Valve Lockout
 KRM-K-BV-03-BF**



Water Pipeline



**OSHA safety
 padlocks (metal
 /nylon shackle)
 Model no.-KRM-
 K-LSPL-DK , DE-DK**

KRM CORPORATION
OSHA'S 10001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Butterfly Valve Lockout

CE Certified

Butterfly valve lockout is used to lock hydraulic, pneumatic and chemical energies efficiently. Made of dielectric material and doesn't effected by any chemical, low in cost with high performance.

Material – Poly Propylene-UV Color with identifiable DANGER label.

KRM LOTO Ball Valve Lockout's body is in two parts, The butterfly valve lockout is a simple, effective way to secure your butterfly valves to prevent unauthorized operation working with low and High temperature variation – 45°C to 200°C

Model – Standard Small with six holes for Locking on both parts will match for Group locking

Size Applicable – Suitable for 2" to 8" (50.8 mm to 203.20 mm) diameter of Ball Valve

Outer edge to edge Length – 295 mm (11.61")

Color – Standard color Red Or any color make as per the required quantity

Weight – 375 gm

MODELS	WIDTH (A)	HEIGHT (B)	LENGTH OF HANDLE(C)	LOCK HOLE (D)	NUMBER OF HOLES (E)
KRM-K-BV-03-BF	300-385mm	64mm	100mm	9mm	Upper Part Hole-6 Lower Part Hole-12

KRM CORPORATION

Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381

**Do not operate tag
 Model no.-KRM-K-LT-2C**

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



Water Pipeline

**BALL VALVE LOCKOUT
 KRM-K-BV-01-ST**



**OSHA safety
 padlocks (metal
 /nylon shackle)
 Model no.-KRM-
 K-LSPL-DK , DE-DK**

CE
Certified

BALL VALVE LOCKOUT(KRM-K-BV-01-ST/LL)

KRM CORPORATION
OHSAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KRM-K-BV-01-ST

KRM-K-BV-01-LL

KRM-K-BV-01-ST-EX

KRM LOTO Ball Valve Lockout's body is in two parts, these are simple, easy to use lockouts that clamp over the valve lever, that is resistant to cracking and abrasion preventing the valve from operating, and lock in place by using catalog, Resistant to low and High temperature variation - 45°C to 200°C.

It is virtually indestructible finger friendly valve covers whose inner side can be used for gripping the valve handle sleeves inside the cover, after locking they prevent valve handle from being turned.

Material – Poly Propylene – UV Color with identifiable DANGER or CAUTION label.

Model – Standard Small with seven or six holes for Locking on both parts will match for Group locking.

Color – Standard color Red Or any color make as per volume

Extension - 88 x 127 mm

Weight – 160 gm

MODELS	WIDTH (A)	HEIGHT (B)	LENGTH OF HANDLE(C)	LOCK HOLE (D)	NUMBER OF HOLES (E)
KRM-K-BV-01-ST	75mm	77mm	135mm-230mm	9mm	7 Holes Upper side 6 Holes lower side
KRM-K-BV-01-LL	75mm	77mm	135mm-230mm	9mm	6 Holes Upper side 10 Holes lower side

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

**Do not operate tag
 Model no.-KRM-K-LT-2C**

KRM CORPORATION
ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



Furnace Panel

Emergency (switch/push)

Lockout button

Model no. – KRM-K-3ESSPBL-TR (milky and red color)

Vinyl/molded coated lockout hasp

Model no.-KRM-K-VCH-S25(jaw dia-25mm)

OSHA safety padlocks (metal /nylon shackle)

Model no.-KRM-K-LSPL-DK , DE-DK

Do not operate tag

Model no.-KRM-K-LT-2C



Lockout Tags ,size - 80 mm x 144 mm in straight and 77 x 138 mm in cut shape -Min qty 550 nos for bilingual language



KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto




KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Multipurpose Vinyl / Molded Coated Hasp KRM-K-VCH-S-25

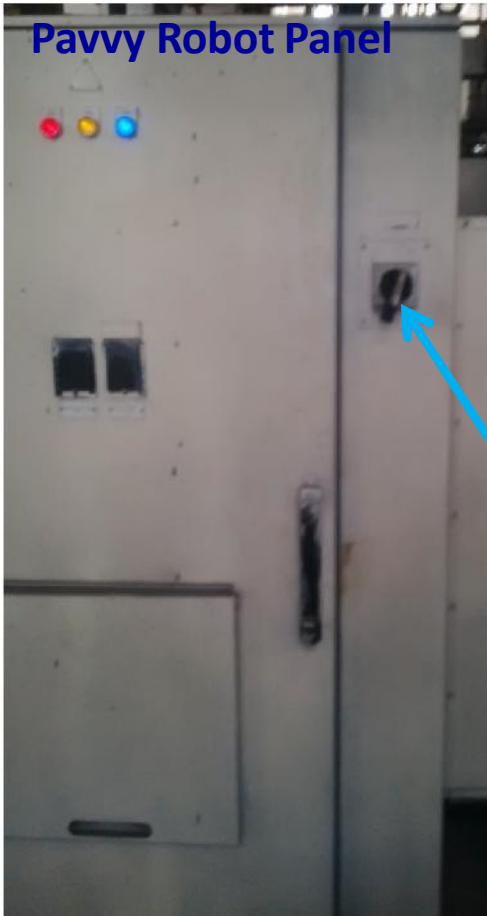

KRM CORPORATION
 SAFETY PRODUCTS
OSHA'S 1901.2007 & BS EN ISO 9001 - 2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

MULTIPURPOSE VINYL / MOLDED COATED HASP

CE Certified

- KRM LOTO Vinyl coated Hasp for Group Locking purpose With 6 holes
- Lower Part : Di- Energize insulated Grip Available in Small & Premier Size
- Material : Hardened Metallic steel with coating.
- Hasp dia : 38/39mm, 25mm
- Outer Length:113mm
- Weight:91gms

KRM-K-VCH-38/39 **KRM-K-VCH-25**

DIMENSIONS					
ITEM CODE	OUTER TENTH (A)	Jaw Size Dia (B)	Padlock HoleDia (C)	No.Of Holes	WEIGHT
KRM-K-VCH-P-38/39	113mm	38mm	10mm	6	91gms
KRM-K-VCH-S-25	113mm	25mm	10mm	6	91gms

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com



Holding Furnace Panel



**Mini Circuit Breaker Lockout
 KRM-K-MCBL-Y-SS**

KRM CORPORATION
OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
 to meet OSHA's Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Mini Circuit Breaker Lockout-Yellow

CE
Certified Products

- Material** – High quality ABS with metallic nut
- KRM Mini Circuit Breaker Lockouts** with plain and folding screw type that is UV resistant. It fits on wide range of switches that is of 0.30" to 0.60" height suitable for single, double, triple and four pole.
- Color** – Yellow, red Or any color as per the required quantity.
- Dimension** – centre to center Length 58 mm, width at Large curve end 29.5 mm, width at lower end 24.5 mm, thickness 13 mm, internal Hole diameter 9 mm, average centre internal Grip 8 mm
- Weight** – 14 gm with simple screw and 22 gm with foldable screw.

MODELS	A	B	C	D	E	F	WEIGHT G
KRM-K-MCBL-Y-SS	58mm	35mm	24.5mm	10mm	15mm	19mm	22gm
KRM-K-MCBL-Y-NS	58mm	35mm	24.5mm	10mm	15mm	19mm	14gm
KRM-K-MCBL-Y1	49mm	30mm	24mm	9mm	12mm	20mm	10gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

OSHA safety padlocks (metal /nylon shackle)
 Model no.-KRM-K-LSPL-DK , DE-DK

Do not operate tag
 Model no.-KRM-K-LT-2C



to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com



Large Circuit Breaker Lockout
KRM-K-LCBL-TR-1

Holding Furnace Panel



OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-KRM-K-L SPL-
 DK , DE-DK-Long Shackle

Do not operate tag
 Model no.-KRM-K-LT-2C

KRM CORPORATION
 SAFETY PRODUCTS
 OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Large Circuit Breaker Lockout

CE Certified Products

- Material** – ABS body with metallic screw
- Large Circuit Breaker Lockout Device with or without Round arrangement at the back having molded teeth for Strong gripping.
- In round large circuit breaker lockout Device the bolt is attached with round portion and in simple device without round we can tighten the screw with the help of screw driver.
- Screw Type** – Plain or folding screw for simple device and adjust the round for tightening the screw in round Lockout device.
- Total twelve holes to place the padlock in round type and one hole for simple Large circuit breaker lockout device.
- It is suitable for 227 V circuit breakers.
- Dimensions** – Center to center length 74 mm, Width including teeth 22.5 mm, Width up to teeth 20 mm, Internal Hole diameter 8 mm
- Color** – Standard color Red or it can make as per the required quantity.
- Weight** – 36 gm for simple screw, 45 gm for adjustable screw and 67 gm for round type circuit breaker lockout.

KRM-K-LCBL-T-R 1

KRM-K-LCBL-T-AS 1

KRM-K-LCBL-T-NS-1

MODELS	A	B	C	D	E	F	G
KRM-K-LCBL-T-R 1	90mm	45mm	74mm	24mm	58mm	10mm	76mm
KRM-K-LCBL-T-AS 1	90mm	45mm	74mm	24mm	58mm	10mm	
KRM-K-LCBL-T-NS-1	90mm	45mm	74mm	24mm	58mm	10mm	

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

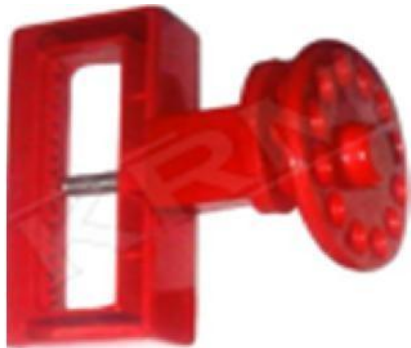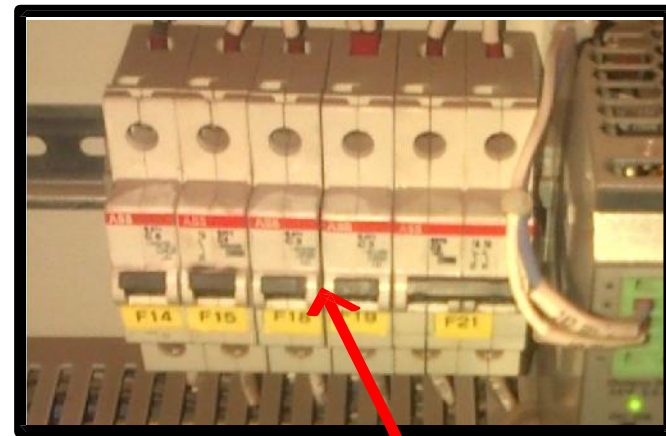

KRM-K-LCBL-TR1
Large Circuit Breaker Lockout



KRM-K-MCBL-Y - SS
Mini Circuit Breaker Lockout with special
foldable screw - yellow

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



KRM-K-DMCBL
Multi function Circuit Breaker Lockout

KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Metal Ball valve Lockout



Die Casting Main Line Hydraulic Valve

OSHA safety padlocks
(metal /nylon shackle)
Model no.-KRM-K-LSPL-
DK , DE-DK-Long Shackle

Do not operate tag
Model no.-KRM-K-LT-2C



KRM-K-MBVL



KRM-K-MBVS



Metal Ball valve Lockout - standard, Hole diameter 9/32" padlock shackles, ball valve sizes from 1.25" to 3" (9/32" lock holes)

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AACPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!



safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



Die Casting Main Line Hydraulic Valve

**OSHA safety padlocks (metal /nylon shackle)
 Model no.-KRM-K-LSPL-DK , DE-DK-Long Shackle**

**Do not operate tag
 Model no.-KRM-K-LT-2C**

**Gate Valve Lockout Device-
 KRM-K-GVL-08**

KRM CORPORATION
 OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Gate Valve Lockout Device

The Gate valve is a locking arrangement that is used to lock spindle and wheel of the gate valve when it's closed and then locked by an authorized person to prevent injuries to the repairmen working at industrial areas, also it's cheap in cost and safe to secure human error, different five sizes are available

- Material** – Poly Propylene with pasted label of identification
- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to -46°C to 177°C.
- Model** – with single and double hole options for lockout
- Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- Size Applicable** – Suitable for
 - KRM-K-GVL- 02 for 25 mm to 64 mm (1" – 2.5") diameter valves
 - KRM-K-GVL- 04 for 63 mm to 130 mm diameter
 - KRM-K-GVL- 06 for 25 mm to 190 mm diameter
 - KRM-K-GVL- 08 for 165 mm to 280 mm
 - KRM-K-GVL- 10 for 280 mm to 381 mm
- Color** – Standard color Red Or any color make as per required quantity
- Weight** – 58 gm, 190 gm, 297 gm, 650 gm and 1250 gm for KRM-K-GVL- 02/04/06/08/10 Respectively.

KRM-K-GVL-02

KRM-K-GVL-04

KRM-K-GVL-06

KRM-K-GVL-08

KRM-K-GVL-10

MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	VALVE HANDLE (SIZE)	NUMBER OF HOLES
KRM-K-GVL-02	66mm	36mm	80mm	41mm	9mm	1"-2.5"	3
KRM-K-GVL-04	132mm	43mm	148mm	49mm	9mm	2.5"-5.11"	3
KRM-K-GVL-06-NMDLA-R	190mm Extend 155mm close	45mm	250mm	48mm	9mm	1"-2.5"	5
KRM-K-GVL-08	280mm	51mm	290mm	64mm	9mm	6.5"-11"	3
KRM-K-GVL-10	381mm	61mm	392mm	73mm	9mm	11"-15"	3

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM-K-GVL-02
 KRM-K-GVL-06

KRM-K-GVL-04
 KRM-K-GVL-10

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

**GBF Fluorine
 Cylinder**



OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-KRM-K-LSPL-
 DK , DE-DK-Long Shackle

**Universal Multi Device Lockout
 KRM-K-UMDL-CEL-Y**

KRM CORPORATION
 OHSAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Universal Multi Device Lockout

CE Certified

Cylinder lockout device is used to lock and isolate the cylinder, large cylinder and valve. Fits instantly and tightly and fix on the space above to the cylinder and includes devices that are universal and cover varying diameters. It does not required extra tool for fixing only latched by the padlocks directly.

- **Material** - Poly Propylene with printed label
- KRM Universal Multi Device Lockout made by joining two parts that are designed to be used on high and low pressure gas cylinders and control the cylinder by locking the regulator attachment
- **Locking slots** – One hole to place the Lock
- **Upper plates** – Two or Three slots are attached with round rivet
- **Outer Size** – diameter 88 mm (3.45”), length 155 mm (6.10”)
- Can lockout equipment of size – 3.4” width x 6” Length
- **Color** - Yellow , Red Or any color make as per required quantity
- **Weight** - 113 gm

MODELS	(A)	(B)	(C)	(D)	(E)
KRM-K-UMDL-CEL-Y	88mm	36mm	14mm	09mm	163mm
KRM-K-UMDL-CEL-R					

KRM-K-UMDL-CEL-Y

KRM-K-UMDL-CEL-R

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Do not operate tag
 Model no.-KRM-K-LT-2C

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Electrical Panel Lockout Double Large KRM-K-DLEPL-90




KRM LOTO
 SAFETY PRODUCTS
KRM CORPORATION
 OHSAS 18001 : 2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

ELECTRICAL PANEL LOCKOUT DOUBLE LARGE

CE Certified

Electrical Panel lockout is used to lock nearly all electrical panels and covers that installed with exposed screws threaded into the panel back-box. Preventing the panel so that by mistake no one operates the panel. Different shapes are available for different sizes.

- **Material** – Polycarbonate body
- Electrical Panel Lockout is having plain surface. Facilitated with hole at base and having provision of cuts on five sides due to which it can also be accommodated on lever, handle etc.
- Available with the provision of cutting at **45 and 90 degree angles**.
- **Color** – Transparent glass
- **Size of double large inner base** – 82 mm X 80 mm
- **Outer size** – 104 mm X 104 mm X 95 mm
- **Weight** – 100 gm



MODELS	OUTER LENGTH	OUTER WIDTH	CUTTING ANGLES	INNER LENGTH	INNER WIDTH	WEIGHT
KRM-K-DLEPL-P	104mm	95mm	—	82mm	80mm	100gm
KRM-K-DLEPL-45	104mm	95mm	45 DEGREE	82mm	80mm	100gm
KRM-K-DLEPL-90	104mm	95mm	90 DEGREE	82mm	80mm	100gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com


safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



Ageing Furnace

**Electrical Panel Lockout Double Large
 KRM-K-DLEPL-90**

OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-KRM-K-LSPL-
 DK , DE-DK-Long Shackle

Do not operate tag
 Model no.-KRM-K-LT-2C

ELECTRICAL PANEL LOCKOUT DOUBLE LARGE

CE Certified

KRM CORPORATION
 OHSAS 18001 : 2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KRM-K-DLEPL-P

KRM-K-DLEPL-90

KRM-K-DLEPL-45

KRM-K-DLEPL-90

Electrical Panel lockout is used to lock nearly all electrical panels and covers that installed with exposed screws threaded into the panel back-box. Preventing the panel so that by mistake no one operates the panel. Different shapes are available for different sizes.

- **Material** – Polycarbonate body
- Electrical Panel Lockout is having plain surface. Facilitated with hole at base and having provision of cuts on five sides due to which it can also be accommodated on lever, handle etc.
- Available with the provision of cutting at **45 and 90 degree angles.**
- **Color** – Transparent glass
- **Size of double large inner base** – 82 mm X 80 mm
- **Outer size** – 104 mm X 104 mm X 95 mm
- **Weight** – 100 gm

MODELS	OUTER LENGTH	OUTER WIDTH	CUTTING ANGLES	INNER LENGTH	INNER WIDTH	WEIGHT
KRM-K-DLEPL-P	104mm	95mm	—	82mm	80mm	100gm
KRM-K-DLEPL-45	104mm	95mm	45 DEGREE	82mm	80mm	100gm
KRM-K-DLEPL-90	104mm	95mm	90 DEGREE	82mm	80mm	100gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com


safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



**Electrical Panel Lockout Double Large
 KRM-K-DLEPL-90**

LOCKOUT/TAGOUT Ce Certified

KRM-LOTO

SAFETY PRODUCTS INDIA

to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147 & 1910.269

Round Shape Di-Electric Lockout Device

- Material** – Body made of ABS, attached with rivet
- Round Shape Di-Electric Lockout device is used to lock the racking in-out point of Air circuit breaker and vacuumed circuit breaker so that no-one can operate the particular device, also can lock some sort of switches that are inserted inside a plane surface.
- Made by riveting two pieces which can be easily rotated in any direction having three holes at bottom part to fix with the screw and also can be stuck with the strong double sided pre-adhesive on requirement for locking purpose.
- Dimension** – Outer Diameter is 46 mm, Inner Diameter is 32 mm, lower cover circle side thickness is 7 mm, overall thickness is 8 mm with upper part thickness 3mm and lower part thickness is 5 mm, locking hole diameter 7 mm.
- Color** – Standard Color Yellow
- Weight** – 20 gm

KRM-K-RSDEL

MODELS	OUTER DIAMETER	INNER DIAMETER	CIRCLE SIDE THICKNESS	OVERALL THICKNESS	LOWER THICKNESS	WEIGHT
KRM-K-RSDEL	46mm	32mm	07mm	18mm	07mm	20gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

**Round Shape Di-Electric Lockout Device
 KRM-K-RSDEL**

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

**KRM LOTO Mushroom Push button
 KRM-K -MPBSL- R -Round**

CNC Turning Machines



Emergency switch Safety- Lockout
 - Milky Transparent/ Red -made
 of Poly propylene- MATERIAL IN
 TWO PARTS + arrangement for
 locking devices + tagging

OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-KRM-K-LSPL-
 DK , DE-DK-Long Shackle

Do not operate tag
 Model no.-KRM-K-LT-2C

KRM LOTO
SAFETY PRODUCTS

KRM CORPORATION
OSHA 1910.269 & 29 EN ISO 101. 1910 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

LOCKOUT TAGS CE Certified Products

Tags are basically used to provide identification and specify the type of fault in industrial area, it can also be fixed with cable tie with lockout devices, and Padlock written in different languages like English and Hindi etc. as per the requirement in different dimensions. Self-laminated Tags basically indicate danger, caution and some other important points related to the installed device. Easily writable with marker and re-writable pen, free from dirt and easily readable.

Material – Polyester/Plastic that is re-writable
 Two color printing or as per the demand which is resistant to the water and oil at extreme temperature, mat finish allows the tag to written with any marker Or re-writable pen that is provided by us.
 Thickness – 0.3 mm to 0.5 mm (± 10 %)
 Size – Vertical length 80 mm x 144 mm and Cut on edges is 77 x 138 mm
 Weight – 5 gm

MODELS	(A)	(B)	(C)	(D)	(E)
KRM-K-LT-ST (SQUARE)	144mm	80mm	10mm	106mm	63mm
KRM-K-LT-C (TAPPER CORNER)	138mm	77mm	10mm	62.5mm	97.7mm

KRM CORPORATION

Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



Riser Milling
 Conveyer & Switch

**KRM LOTO Mushroom Push button
 KRM-K -MPBSL- R -Round**

KRM CORPORATION
OSHA'S 19101-2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

LOCKOUT TAGS

Tags are basically used to provide identification and specify the type of fault in industrial area, it can also be fixed with cable tie with lockout devices, and Padlock written in different languages like English and Hindi etc. as per the requirement in different dimensions. Self-laminated Tags basically indicate danger, caution and some other important points related to the installed device. Easily writable with marker and re-writable pen, free from dirt and easily readable.

Material – Polyester/Plastic that is re-writable
 Two color printing or as per the demand which is resistant to the water and oil at extreme temperature, mat finish allows the tag to written with any marker Or re-writable pen that is provided by us.
Thickness – 0.3 mm to 0.5 mm (± 10 %)
Size – Vertical length 80 mm x 144 mm and Cut on edges is 77 x 138 mm
Weight – 5 gm

CE
Certified Products

MODELS	(A)	(B)	(C)	(D)	(E)
KRM-K-LT-ST (SQUARE)	144mm	80mm	10mm	106mm	63mm
KRM-K-LT-TC (TAPPER CORNER)	138mm	77mm	10mm	62.5mm	97.7mm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Do not operate tag
 Model no.-KRM-K-LT-2C

OSHA safety padlocks (metal /nylon shackle)
 Model no.-KRM-K-LSPL-DK , DE-DK-Long Shackle

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com


safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

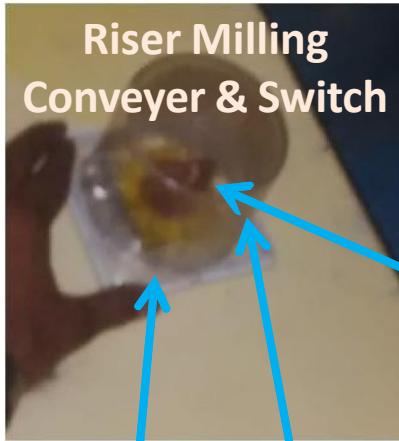

**Riser Milling
 Conveyor & Switch**

Electrical Panel Lockout Large Round
KRM-K -EPL R

OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-KRM-K-LSPL-
 DK , DE-DK-Long Shackle

KRM CORPORATION
OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Electrical Panel Lockout Large Round

Certified Products

Electrical Panel lockout is used to lock nearly all electrical panels and covers that installed with exposed screws threaded into the panel back-box. Preventing the panel so that by mistake no one operates the panel. Different shapes are available for different sizes.

- **Material** – Strong Polycarbonate body
- Electrical Panel Lockout is rotary and ideal to fix by pressing and screw on electrical switch button permanently and prevent worker by operating for a mistake, having two parts with detachable hinges.
- Two holes are provided for group locking purpose.
- It can also be extended upto 30 mm height.
- **Color** – Transparent glass
- **Outer square base** – 95 mm X 95 mm with inner round diameter 75 mm
- **Upper Round Size** – Internal diameter 80 mm and depth 65 mm
- **Weight** – 87 gm

MODELS	A	B	C	D	E	F	CUTTING ANGLES
KRM-K-EPL-R	84mm	69mm	82mm	95mm	95mm	78mm	————
KRM-K-EPL-45-R	84mm	69mm	82mm	95mm	95mm	78mm	45 DEGREE
KRM-K-EPL-90-R	84mm	69mm	82mm	95mm	95mm	78mm	90 DEGREE

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Do not operate tag
 Model no.-KRM-K-LT-2C

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Crane Pendant



KRM-K-AFLBD-1
 Adjustable Flexible Lockout Bag

Adjustable Flexible Lockout Bag

KRM Adjustable Flexible Lockout Bag used for Plug, connector, hoist control button, lever, cylinder, Pneumatic etc. which is basically a hollow tube, PVC can be insert and make tight lockout

- Slots - Four holes to put the padlocks .
- Color – Red
- Hole Dia – 9mm
- Height = 18 inch, 25 inch

CE
Certified

KRM-K- AFLBD

MODELS	OUTER LENGTH	OUTER WIDTH	HOLE DIA	NUMBER OF HOLES	WEIGHT
KRM-K- AFLBD-1	458 mm	242 mm	09 mm	4	250 gm
KRM-K- AFLBD-2	635 mm	300 mm	09 mm	4	300 gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-KRM-K-LSPL-
 DK , DE-DK-Long Shackle

Do not operate tag
 Model no.-KRM-K-LT-2C

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AACPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



Bond rising Machine

Do not operate tag
 Model no.-KRM-K-LT-2C



KRM-K-PDE-T R- L

Padlock eye Tapper shape - large - Right angled

KRM-K-PDE-TR- S

Padlock eye Tapper shape - SMALL - Right angled

KRM LOTO SAFETY PRODUCTS

KRM CORPORATION
OSHA'S 19001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

KRM-K-LSPL-DK- Diffrent Key
 KRM-K-LSPL-KA- Alike Key
 KRM-K-LSPL-DK+M-Diffrent+ Master Key
 (KRM-K-LSPL)

OSHA LOCKOUT METAL SHACKLE PADLOCK

CE Certified Product

A Padlock Is A Detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.

- KRM LOTO SAFETY PADLOCK----"seamless" lock structure durability-Key system: DIFFER KEY , ALIKE KEY Master & differ KEYThe new management key technology- 6 level management
- High Quality with waterproof, anti-corrosion and strong adhesive.Side of the antiskid design,
- Key retaining-ensures that padlock is not left unlocked
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management. -
- Key system: DIFFER KEY , ALIKE KEY Master & differ KEY
- Body material :Glass fiber reinforced nylon/ (composition of ABS + NYLON)
- Shackle Material:Heavy coated carbide steel
- Color: Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- Work temperature 0° - 250° F (-20° - 120° C)

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH(C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
45mm	40mm	20mm	38mm	20mm	6mm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

OSHA safety padlocks (metal /nylon shackle)
 Model no.-KRM-K-LSPL-DK , DE-DK-Long Shackle



KRM-K-GVL-08
Gate Valve Lockout Device



Bond rising Machine

OSHA safety padlocks
(metal /nylon shackle)
Model no.-KRM-K-LSPL-
DK , DE-DK-Long Shackle

Do not operate tag
Model no.-KRM-K-LT-2C

KRM CORPORATION
OSHA 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Gate Valve Lockout Device-08

The Gate valve is a locking arrangement that is used to lock spindle and wheel of the gate valve when it's closed and then locked by an authorized person to prevent injuries to the repairmen working at industrial areas, also it's cheap in cost and safe to secure human error, different five sizes are available

KRM-K-GVL-08

- KRM LOTO Gate Valve Lockout is made by two parts these rotational valve covers can withstand in extreme weather conditions, resistant to cracking and abrasion that is valid for temperature range up to -46°C to 177°C.
- It Surrounds the valve hand-wheel to prevent from being turned and protect against accidental operations.
- **Material** – Poly Propylene.
- **Model** – 3 holes locking option is KRM standard product
- **Size Applicable** – Suitable for
KRM-K-GVL-08 for 165 mm to 280 mm diameter
- **Color** – Standard color Red Or any color make as per volume.
- **Weight** – 650 gm

MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	VALVE HANDLE (SIZE)	NUMBER OF HOLES
KRM-K-GVL-08	280mm	51mm	290mm	64mm	9mm	6.5"-11" 165-280mm	3

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com



KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AACPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto




KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



CNC Machine

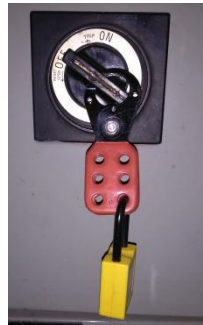

**OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-KRM-K-LSPL-
 DK , DE-DK-Long Shackle**

**KRM-K-VCH-S-25
 Multipurpose Vinyl/ Molded Coated Hasp**

KRM CORPORATION
OSHA 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

MULTIPURPOSE VINYL / MOLDED COATED HASP

CE Certified

- KRM LOTO Vinyl coated Hasp for Group Locking purpose With 6 holes
- Lower Part : Di- Energize insulated Grip Available in Small & Premier Size
- Material : Hardened Metallic steel with coating.
- Hasp dia : 38/39mm, 25mm
- Outer Length:113mm
- Weight:91gms

DIMENSIONS					
ITEM CODE	OUTER TENTH (A)	Jaw Size Dia (B)	Padlock HoleDia (C)	No.Of Holes	WEIGHT
KRM-K-VCH-P-38/39	113mm	38mm	10mm	6	91gms
KRM-K-VCH-S-25	113mm	25mm	10mm	6	91gms

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

**Do not operate tag
 Model no.-KRM-K-LT-2C**



KRM-K-LCBL-T-R1
Large Circuit Breaker Lockout

Oil Hole Drilling



OSHA safety padlocks
 (metal /nylon shackle)
 Model no.-KRM-K-LSPL-
 DK , DE-DK-Long Shackle

KRM CORPORATION
OSHAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Large Circuit Breaker Lockout

CE Certified

- Material – ABS body with metallic screw
- Large Circuit Breaker Lockout Device with or without Round arrangement at the back having molded teeth for Strong gripping.
- In round large circuit breaker lockout Device the bolt is attached with round portion and in simple device without round we can tighten the screw with the help of screw driver.
- Screw Type** – Plain or folding screw for simple device and adjust the round for tightening the screw in round Lockout device.
- Total twelve holes to place the padlock in round type and one hole for simple Large circuit breaker lockout device.
- It is suitable for 227 V circuit breakers.
- Dimensions** – Center to center length 74 mm, Width including teeth 22.5 mm, Width up to teeth 20 mm, Internal Hole diameter 8 mm
- Color** – Standard color Red or it can make as per the required quantity.
- Weight** – 36 gm for simple screw, 45 gm for adjustable screw and 67 gm for round type circuit breaker lockout.

KRM-K-LCBL-T-R 1

KRM-K-LCBL-T-AS 1

KRM-K-LCBL-T-NS-1

MODELS	A	B	C	D	E	F	G
KRM-K-LCBL-T-R 1	90mm	45mm	74mm	24mm	58mm	10mm	76mm
KRM-K-LCBL-T-AS 1	90mm	45mm	74mm	24mm	58mm	10mm	
KRM-K-LCBL-T-NS-1	90mm	45mm	74mm	24mm	58mm	10mm	

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Do not operate tag
 Model no.-KRM-K-LT-2C

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

KRM-K-LSPL Osha Lockout Metal Shackle Padlock



CNC Machine

KRM CORPORATION
OSHAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

OSHA LOCKOUT METAL SHACKLE PADLOCK

A Padlock Is A Detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.

CE
Certified Products

- KRM LOTO SAFETY PADLOCK----"seamless" lock structure durability-Key system: DIFFER KEY , ALIKE KEY Master & differ KEYThe new management key technology,- 6 level management
- High Quality with waterproof, anti-corrosion and strong adhesive.Side of the antiskid design,
- Key retaining-ensures that padlock is not left unlocked
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management. -
- Key system: DIFFER KEY , ALIKE KEY Master & differ KEY
- Body material :Glass fiber reinforced nylon/ (composition of ABS + NYLON)
- Shackle Material:Heavy coated carbide steel
- Color:Red, Yellow, Blue, Green, Orange, White, Brown,
- Black, Purple
- Work temperature 0° - 250° F (-20° - 120° C)

KRM-K-LSPL-DK- Diffrent Key
 KRM-K-LSPL-KA- Alike Key
 KRM-K-LSPL-DK+M-Diffrent+ Master Key

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH(C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
45mm	40mm	20mm	38mm	20mm	6mm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Do not operate tag
 Model no.-KRM-K-LT-2C



KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AACPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Concept Machine



KRM-K-GVL-08
 Gate Valve Lockout Device-08

KRM CORPORATION
OSHAS 19001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Gate Valve Lockout Device-08

The Gate valve is a locking arrangement that is used to lock spindle and wheel of the gate valve when it's closed and then locked by an authorized person to prevent injuries to the repairmen working at industrial areas, also it's cheap in cost and safe to secure human error, different five sizes are available

KRM-K-GVL-08

MODELS	INSIDE DIAMETER (A)	INSIDE HEIGHT (B)	OUTSIDE DIAMETER(C)	OUTSIDE HEIGHT(D)	LOCK HOLE (E)	VALVE HANDLE (SIZE)	NUMBER OF HOLES
KRM-K-GVL-08	280mm	51mm	290mm	64mm	9mm	6.5"-11" 165-280mm	3

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Do not operate tag Model no.-KRM-K-LT-2C

OSHA safety padlocks (metal /nylon shackle)
 Model no.-KRM-K-LSPL-DK , DE-DK-Long Shackle



KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



OSHA safety
padlocks (metal
/nylon shackle)
Model no.-KRM-K-
LSPL-DK , DE-DK-
Long Shackle

**KRM LOTO Mushroom Push button
KRM-K -MPBSL- R –Round**

KRM CORPORATION
OSHA'S 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

LOCKOUT TAGS

Tags are basically used to provide identification and specify the type of fault in industrial area, it can also be fixed with cable tie with lockout devices, and Padlock written in different languages like English and Hindi etc. as per the requirement in different dimensions. Self-laminated Tags basically indicate danger, caution and some other important points related to the installed device. Easily writable with marker and re-writable pen, free from dirt and easily readable.

Material – Polyester/Plastic that is re-writable
Two color printing or as per the demand which is resistant to the water and oil at extreme temperature, mat finish allows the tag to written with any marker Or re-writable pen that is provided by us.
Thickness – 0.3 mm to 0.5 mm (± 10 %)
Size – Vertical length 80 mm x 144 mm and Cut on edges is 77 x 138 mm
Weight – 5 gm

CE
Certified Products

MODELS	(A)	(B)	(C)	(D)	(E)
KRM-K-LT-ST (SQUARE)	144mm	80mm	10mm	106mm	63mm
KRM-K-LT-TC (TAPPER CORNER)	138mm	77mm	10mm	62.5mm	97.7mm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Do not operate tag
Model no.-KRM-K-LT-2C

KRM CORPORATION
 ISO 9001:2015, ISO 14001:2015, ISO 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



Trial Furnace

KRM- K-DLEPL-45
Electrical Panel Lockout Double Large

OSHA safety
 padlocks (metal
 /nylon shackle)
 Model no.-KRM-K-
 LSPL-DK , DE-DK-
 Long Shackle

KRM CORPORATION
OSHAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Electrical Panel Lockout Double Large

CE Certified Products

Electrical Panel lockout is used to lock nearly all electrical panels and covers that installed with exposed screws threaded into the panel back-box.

- **Material** – Polycarbonate body
- Electrical Panel Lockout is having plain surface. Facilitated with hole at base and having provision of cuts on five sides due to which it can also be accommodated on lever, handle etc.
- Available with the provision of cutting at **45 and 90 degree angles.**
- **Color** – Transparent glass
- **Size of double large inner base** – 82 mm X 80 mm
- **Outer size** – 104 mm X 104 mm X 95 mm
- **Weight** – 100 gm

KRM-K-DLEPL-90

KRM-K-DLEPL-P

MODELS	OUTER LENGTH	OUTER WIDTH	CUTTING ANGLES	INNER LENGTH	INNER WIDTH	WEIGHT
KRM-K-DLEPL-P	104mm	95mm	—	82mm	80mm	100gm
KRM- K-DLEPL-45	104mm	95mm	45 DEGREE	82mm	80mm	100gm
KRM- K-DLEPL-90	104mm	95mm	90 DEGREE	82mm	80mm	100gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Do not operate tag
 Model no.-KRM-K-LT-2C



ID Beveling Machine

**Universal Circuit Breaker Lockout
 KRM-K-UCBL-R-NSS /-**



OSHA safety
 padlocks (metal
 /nylon shackle)
 Model no.-KRM-K-
 LSPL-DK , DE-DK-
 Long Shackle

KRM CORPORATION
 OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Universal Circuit Breaker Lockout

Universal circuit breaker lockout is a versatile device fits on wide range of single, double, triple and four pole of electrical circuit breaker can be accommodates up to one lock and with the help of hasp lockout device can be used for group isolation.

- Material** – High quality ABS with metallic nut
- KRM Universal Circuit Breaker Lockouts will lockout most type of breaker's lever. One size fits in all type of circuit breakers having **nose or without nose** for better gripping which is UV resistant and suitable for single, double, triple and four pole circuit breaker can be locked with single **padlock and lockout hasp for group locking purposes.**
- This is basically providing a complete solution of circuit breaker safety, in which each product is different from other one includes with nose, without nose, normal screw, foldable screw.
- Specialty of this lockout is that folding screw is there so that no extra tool required to tighten the screw on the device.
- Color** – Red, Yellow, Green and Blue Or any color make as per the required quantity.
- Size** – length 56 mm, width 26 mm, thickness 19 mm, outer Thickness at locking end 11 mm, locking Hole diameter 9 mm, average Centre internal Grip 13.5 mm, Average centre internal Grip 13.5 mm
- Weight** – 72 gm for KRM-K-UCBL-R22 and 52 gm for KRM-K-UCBL-R-4

KRM-K-UCBL-R-PSS

KRM-K-UCBL-R-P1

KRM-K-UCBL-R-NSS

KRM-K-UCBL-R-N1

MODELS	A	B	C	D	E	F
KRM-K-UCBL-R-P-SS	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-P1	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-N-SS	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-N1	56mm	40mm	26mm	9mm	11mm	19mm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

**Do not operate tag
 Model no.-KRM-K-LT-2C**

KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

TECHNICAL DETAILS OF KRM LOTO PRODUCTS



KRM CORPORATION

OHSAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269



KRM-K-ULD-WSA-1-15+WC

UNIVERSAL VALVE LOCKOUT DEVICE WITH **SMALL** BLOCKING ARM & STEEL INSULATED CABLE



KRM UVLD is designed to lockout almost all type of valves for variable sizes and handle dimensions (square /round/flat plain) & different lengths. Valves can also be locked in any positions for non lock-out uses.

- KRM LOTO Universal Valve Lockout with single blocking arm
- Material Parts - ABS / PP + Metal part + Spring + cable
- Lower Bottom Jaw Grip - 15 mm
- Use - locking of Gate Valves / Wheels / Ball Valves
- Locking - 4 holes for Group locking
- Total Height - 152 mm
- **Short arm size(KRM-K-SA) :**
- Length of steel rod - 160 mm
- Thickness of steel rod - 9 mm
- Horizontal - 155 mm
- Color - Red or any color as per quantity
- Weight - 430 gms

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

TECHNICAL DETAILS OF KRM LOTO PRODUCTS



KRM CORPORATION

OHSAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

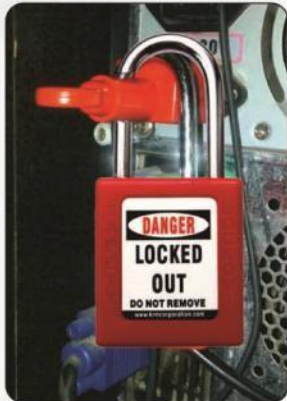

Input Power Cable Supply Lockout Device

CE Certified

For providing protection to different Energy sources for group isolation when multiple authorized employees need to lockout the same energy source at a time to meet Osha's Lockout/Tagout Standard, 29 CFR & 1910.147 & 1910.269

- KRM In Put power Supply Cable Lockout
- Material – Nylon , Elastomeric and Bolt
- Model - Elastomeric nose that strongly grip to the inner part of connector hosing
- Advantage – No Screw Driver need to lock this device
- Use – Can use with IEC60320 type input connector power fitted equipment
- Suitable – for devices having REMOVABLE POWER CHORD for computer, multi laboratory instrument, power supplies devices –etc.
- Holes for chord – 9 mm holes dia.
- Colour : Red & black
- Weight : 100 gms.



KRM-K-INCLD-R

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwrajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

TECHNICAL DETAILS OF KRM LOTO PRODUCTS



KRM CORPORATION

OHSAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

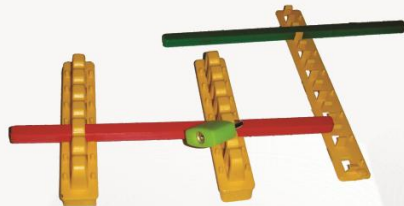

KRM-K-BLK

Circuit Breaker Lockout Rail Kit

CE
 Certified

For providing protection to different Energy sources for group isolation when multiple authorized employees need to lockout the same energy source at a time to meet **Osha's Lockout/Tagout Standard, 29 CFR & 1910.147 & 1910.269**

Material – ABS

KRM Lockout Breaker Kit's body is in two parts, available with two rails and two blocking bars in which rails are available with pre – adhesive and small holes for drilling to install the device.

Device is having two locking rails and two blocking arms.

It can be installed in electrical panel Or circuit breaker directly, for lockout purpose SIX holes are available.

This Lockout device is suitable for 480 V to 600 V.

Size – Blocking Bar/Arm is of length 8”

Blocking Bar/Arm is available in two different color option green color indicates Locked 'OFF' situation and Red color indicates Locked 'ON' situation.

Color – Blocking Bar is of Red and Green color alternatives and Locking rails is of yellow color.

Weight – 75 gm

KRM CORPORATION

Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381

Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com



Lockout Tags – These are used to put information on lockout device . These can be customized in any design as per requirement.

KRM Code – KRM – K- LT-ST

- **Material** – Polyester/Plastic that is re-writable
- For identification scanned photo, remark and details of authorized person that are working on isolated equipment can be supplied, with both sides printing in two color.
- Mat finish allows the tag to written with any marker Or re-writable pen that is provided by us.
- **Thickness** – 0.3 mm to 0.5 mm (± 10 %)
- **Size** – Vertical length 80 mm x 144 mm and Cut on edges is 77 x 138 mm
- **Weight** – ±10 gm



KRM LOTO MULTIPURPOSE TAGS / TAG HOLDERS



GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

TECHNICAL DETAILS OF KRM LOTO PRODUCTS

OSHA SAFETY LOCK TAG PADLOCK – METAL SHACKLE

- Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.
- KRM LOTO SAFETY PADLOCK ---"seamless" lock structure durability-Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY. The new management key technology,- 10 level management.
- With a curve at top to hold the lock with better grip
- Key Head in injection mold with same color of the lock.
- High Quality with waterproof, corrosion resistant and strong adhesive. Side of the design
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY.
- Body material: Glass fiber reinforced nylon/(composition of ABS+NYLON)
- Shackle Material: Metal Shackle
- Color: Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- Work temperature 0o - 250o F (-20o--120o C)
- Also "DO NOT REMOVE", permanently engraved on the lock.



KRM-K-OSLTP-C-MDK



BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACLE WIDTH (E)	SHACKLE THICKNESS (F)
45 mm	40 mm	20 mm	38 mm	20 mm	6 mm

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

TECHNICAL DETAILS OF KRM LOTO PRODUCTS

OSHA SAFETY LOCK TAG PADLOCK – NYLON SHACKLE

- Padlock Is a detachable Lock Passed By An Opening With U-shaped Shackle Used To Protect Against Unauthorized Or Unwanted Stealing. Provided With Latest Locking Mechanism Used To Lock The Different Devices.
- KRM LOTO SAFETY PADLOCK ---"seamless" lock structure durability-Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY. The new management key technology,- 10 level management.
- With a curve at top to hold the lock with better grip
- Key Head in injection mold with same color of the lock.
- High Quality with waterproof, corrosion resistant and strong adhesive. Side of the design
- Key retaining-ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management.
- Key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY.
- Body material: Glass fiber reinforced nylon/(composition of ABS+NYLON)
- Shackle Material: Nylon Color: Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- Work temperature 0o - 250o F (-20o--120o C)
- Also "DO NOT REMOVE", permanently engraved on the lock.



KRM-K-OSLTP-C-NDK

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACLE WIDTH (E)	SHACKLE THICKNESS (F)
45 mm	40 mm	20 mm	38 mm	20 mm	6 mm

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

TECHNICAL DETAILS OF KRM LOTO PRODUCTS

KRM CORPORATION
 OHSAS 18001:2007 & BS EN ISO 9001 : 2008 CERTIFIED COMPANY
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Universal Circuit Breaker Lockout

CE Certified

Universal circuit Breaker lockout is a versatile device fits on wide range of single, double, triple and four pole of electrical circuit breaker can be accommodates up to one lock and with the help of hasp lockout device can be used for group isolation.

- **Material** – High quality ABS with metallic nut
- KRM Universal Circuit Breaker Lockouts will lockout most type of breaker's lever. One size fits in all type of circuit breakers having **nose or without nose** for better gripping which is UV resistant and suitable for single, double, tripe and four pole circuit breaker can be locked with single **padlock and lockout hasp for group locking purposes.**
- This is basically providing a complete solution of circuit breaker safety, in which each product is different from other one includes with nose, without nose, normal screw, foldable screw.
- Specialty of this lockout is that folding screw is there so that no extra tool required to tighten the screw on the device.
- **Color** – Red, Yellow, Green and Blue Or any color make as per the required quantity.
- **Size** – length 56 mm, width 26 mm, thickness 19 mm, outer Thickness at locking end 11 mm, locking Hole diameter 9 mm, average Centre internal Grip 13.5 m, Average centre internal Grip 13.5 mm
- **Weight** – 72 gm for KRM-K-UCBL-R22 and 52 gm for KRM-K-UCBL-R-4

MODELS	A	B	C	D	E	F
KRM-K-UCBL-R-P-SS	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-P1	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-N-SS	56mm	40mm	26mm	9mm	11mm	19mm
KRM-K-UCBL-R-N1	56mm	40mm	26mm	9mm	11mm	19mm

KRM CORPORATION

Email: info@krmcorporation.com, wadhwarajinder@gmail.com,

Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381

website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION
 ISO 9001:2015, ISO 14001:2015, ISO 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAMPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto




KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

TECHNICAL DETAILS OF KRM LOTO PRODUCTS

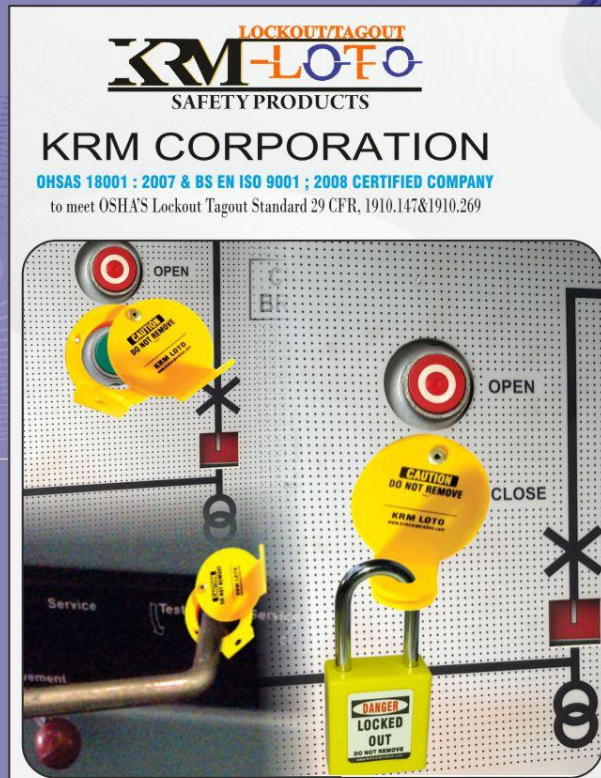

ROUND SHAPE DI-ELECTRIC LOCKOUT DEVICE

CE Certified

- **Material** – Body made of ABS, attached with rivet
- Round Shape Di-Electric Lockout device is used to lock the racking in-out point of Air circuit breaker and vacuumed circuit breaker so that no-one can operate the particular device, also can lock some sort of switches that are inserted inside a plane surface.
- Made by riveting two pieces which can be easily rotated in any direction having three holes at bottom part to fix with the screw and also can be stuck with the strong double sided pre-adhesive on requirement for locking purpose.
- **Dimension** – Outer Diameter is 46 mm, Inner Diameter is 32 mm, lower cover circle side thickness is 7 mm, overall thickness is 8 mm with upper part thickness 3mm and lower part thickness is 5 mm, locking hole diameter 7 mm.
- Color – Standard Color Yellow
- **Weight** – 20 gm



KRM-K-RSDEL

MODELS	OUTER DIAMETER	INNER DIAMETER	CIRCLE SIDE THICKNESS	OVERALL THICKNESS	LOWER THICKNESS	WEIGHT
KRM-K-RSDEL	46mm	32mm	07mm	18mm	07mm	20gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO 9001:2015

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

TECHNICAL DETAILS OF KRM LOTO PRODUCTS



KRM CORPORATION

OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

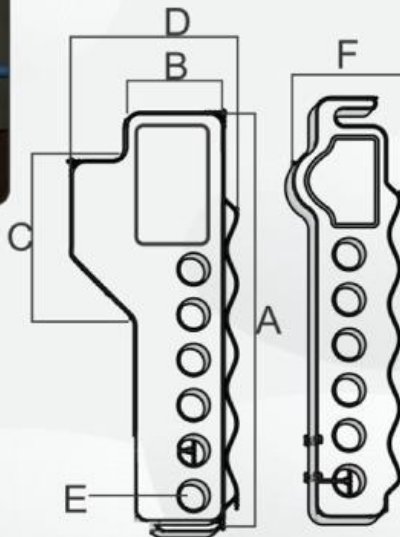

Multipurpose Scissor Cable Lockout



Cable lockout devices are extremely flexible and economical and can be used for multipurpose lockout in electrical or mechanical machines, to lock feed the cable end through the points to be locked out and then tighten the throughout the body of the equipment. Provided with insulated steel cable of high quality and durability.

- **Material** – ABS and Mild stainless steel insulated cable
- KRM LOTO Multi Purpose Cable Lockout body is in two parts, Shape of Scissor with insulated cable that is having totally six holes in scissor for group isolation.
- **Insulated Cable** – of length 2 mtr (steel cable) & 1.9mtr (de - electric cable) , thickness 5 mm and avail as per the demand
- **Color** – Red, Yellow, Blue and Green
- Complete Outer Size of the scissor is - **length** - 122mm, Average Width - 26.5mm, Width at flat end - 44mm, Thickness - 13mm, Internal Hole diameter – 9 mm
- **Weight** – 100 gm and without cable 75 gm



MODELS	Length	Width	Thickness	No. of Holes	Cable Length	Weight With Cable
KRM-K-MPS	122mm	26.5mm	13mm	06		75gm
KRM-K-MPS+C	122mm	26.5mm	13mm	06	2mtr	100gm
KRM-K-MPS+DEC	122mm	26.5mm	13mm	06	1.9mtr	100gm

KRM CORPORATION

Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381

Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION
 ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
 PAN No.: AAVPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
 QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

TECHNICAL DETAILS OF KRM LOTO PRODUCTS

KRM LOTO
 SAFETY PRODUCTS
KRM CORPORATION
 to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147 & 1910.269

KRM-K-RMCLT-6-B/G/R/Y
KRM-K-RMCLT-6CL-Y/R/B/G

KRM-K-RMCLT-6
 WITH 6 HOLES ON THE TOP &
 8 HOLES ON THE BOTTOM

Round Multipurpose Cable Lockout Without Tool

- Material – ABS or Polypropylene cable
- KRM LOTO Round Multi Purpose Cable Lockout with knob grip for rotation used to the installed device for safety purposes that is made with two parts, Upper part having 6 hole and lower part having 8 holes
- metallic bolt in built is anti rust coated
- Cable length** - 1.5 meter, 2 meter, 3 meter, 5 meter, 10 meter, 20 meter. Standard cable thickness is 4 mm, 5 mm available on request at additional cost.
- Can be utilized to lock ball valve, gate valve and author electrical equipment that is used for electrical and mechanical group isolation.
- Color** - Red, Yellow, Green and Blue
- Weight** – 40 gm for the body and 55 gm for 2 meter cable

KRM-K-RMCLT-6CL-R
 (CABLE WITH LOOP)

KRM-K-RMCLT-6C-R
 (CABLE WITHOUT LOOP)

KRM-K-RMCLT-6-R
 (WITHOUT CABLE)

MODELS	A	B	C	No. of Hole	Weight
KRM-K-RMCLT-6-B/G/R/Y	40mm	15mm	7.5mm	6	40gm
RM-K-RMCLT-6C-B/G/R/Y	40mm	15mm	7.5mm	6	95gm
KRM-K-RMCLT-6CL-B/G/R/Y	40mm	15mm	7.5mm	6	95gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
 Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)



KRM CORPORATION

OSHAS 18001:2007 & BS EN ISO 9001 : 2000 CERTIFIED COMPANY
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269



KRM-K-GPLB-Y12

KRM-K-GPLB-R16

KRM-K-GPLB-R16

Group Lockout Box



Group lockout boxes are compulsory and important safety equipment. We are providing huge range of lockout boxes of different sizes and features. All the important material, keys or papers can be placed inside the box and further locked by responsible individuals in crew with their own padlocks until each person task is finished removed when all of them for group isolation.

- Material – Made of Mild Stainless Steel Sheet with Powder coated
- KRM Group Portable Lockout Box for accident prevention that can store keys and important documents in it and then can be locked in multiple slots for group locking, and one main locking arrangement.
- Locking Slots – Six + Six, Eight + Eight slots for group locking on sides and one at front side for main lockout
- Color – Red, Yellow Or as per the requirement
- Complete Outer Size – length 253 mm, width 110 mm, height 154 mm
- Weight – 1600 gm

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381

Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO Lockout Tagout Kit (With Pouch, mini/medium/large size)



KRM LOTO - Lockout Bag/ pouch – Available in different sizes to keep and carry material at isolation site.

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

KRM LOTO – LOCKOUT TAGOUT STATION



KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

safe loto



www.lotoappliances.com



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

KRM LOTO – PORTABLE GROUP LOCKOUT BOX



KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2019
to meet OSHA's Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAPPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

Mo: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Escape Signs

KRM produce a range of fire exit signs which assist in the identification of the escape route, helping to lead people to their nearest fire exit. A fire exit route is an additional route to the way occupants would normally enter or leave the building.

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Multipurpose Safety Signs

For providing protection to different Energy sources for group isolation when multiple authorized employees need to lockout the same energy source at a time to meet Osha's Lockout/Tagout Standard, 29 CFR & 1910.147 & 1910.269

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
Email: lockout@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in

Photo Luminescent HAZARD SIGNS

KRM produce a range of exit signs which assist in the identification of the escape route, helping to lead people to a place of safety. An exit route is the route that would normally be used to enter or leave the building.

KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 00 91 129 - 4021 381
Email: info@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockouttagouts.com

Lockout Poster/Hangout

For providing protection to different Energy sources for group isolation when multiple authorized employees need to lockout the same energy source at a time to meet Osha's Lockout/Tagout Standard, 29 CFR & 1910.147 & 1910.269


KRM CORPORATION Contact No.: 00 91 9810 291 381, 8800 544 881 Ph: 0091 129 - 4021 381
Email: lockout@krmcorporation.com, wadhwarajinder@gmail.com, website: www.krmcorporation.com, www.lockout.in



LOCKOUT - TAGOUT FOR SAFETY
 LOCKOUT TAGOUT PRODUCTS INCREASE EFFICIENCY AND SAFETY LEVELS ARE USED IN CREATING A SAFER WORKER ENVIRONMENT

- 1. Identify**
the types of energy sources used, potential hazards, and all control devices.
- 2. Notify**
all affected employees.
- 3. Turn off**
all operating controls.
- 4. Locate**
all energy sources.
- 5. Isolate**
all energy sources by blocking, bleeding and venting stored energy as found in springs, hydraulic systems and pneumatic systems.
- 6. Lock-out**
all switches and energy controls in the 'off' or 'safe' position.
- 7. Test**
the operating controls . Put all controls in the 'on' position. Be sure nobody can get hurt before testing.
- 8. Return**
all operating controls to the 'off' position.
- 9. Perform**
required task.
- 10. Remove**
lock-out devices only after the equipment is fully assembled and all affected employees have been notified. Each lock-out device must be removed by the person who put it on .

LOTOTO WORK INSTRUCTION

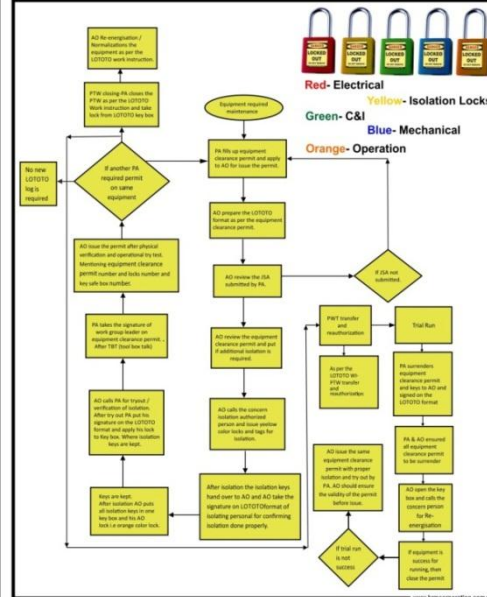

KNOW HOW TO LOCK OUT ACCIDENTS!

Make sure that you are trained to De-energize and Lockout the machine. Never give your lock and key to anyone. Always treat equipment as live. Never tamper or remove other lock. Remember, that Lockout must be done on all energy types.

<p>Identify the Equipment to be locked out. Notify the Area Supervisor or Affected employees. Notify the Control Room.</p>	<p>Shut down the equipment by using its operating controls. Take care that you don't endanger anyone during shutdown. Check that equipment has come to a standstill.</p>
<p>Switch off all electrical sources. Be sure to isolate all energy sources—secondary as well as the main one. Secure against movement.</p>	<p>Only Authorized personnel should apply proper Lockout Device and tag. All team members must affix individual padlocks for personal safety.</p>
<p>Record Reasons of Lockout. Record Date, Time and Name of the Person Performing Lockout job. Record the Details of Lockout Devices.</p>	<p>Attempt to Start the equipment by all possible means. Verify that the Equipment is secured against any Movement.</p>
<p>Use Proper Notices and Signboard to mark Lockout Zone. Use Other Safety Measures as per the job requirement.</p>	<p>Perform the job/ Repairing Maintenance etc. Keep Locked out Until the Task is Complete. Remove Lockouts Safely after the completion of job. Check and Re-energize the machinery.</p>

KRM CORPORATION

ISO 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO guidelines for LOCKOUT TAGOUT System to meet OSHA LOCKOUT/TAGOUT STANDARD, 29CFR 1910.47 & 1910.269

For Technical / commercial details of individual product please contact
Rajinder Wadhwa I M: +91 9810291381, 8800544881 I Skype: rajinderwadhwa

Email: info@krmcorporation.com, info@krmloto.com, krmloto@gmail.com

KRM Corporation

Regd. Off. :1H/31-A, N.I.T. Faridabad-Haryana-121001,India

Postal Add.: 615. Sector-15-A, Faridabad-121007.

Telefax: +91 129 402 1381 | Dir.: +91 129 413 1381

Websites: www.krmcorporation.com | www.krmloto.com | www.lockoutmaster.com | www.safetyloto.com

KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



Lock Tag!!

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

safe loto



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Notes:

- Lock & Tag should be used with all loto products.
- For group locking on particular energy hasp should be used.
- Group lockout box should be used for group lockout tag out.
- Scissor Cable or Round cable lockout can be used to lock multiple hazardous energies instead putting individual locks & tags.