



INR



A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock different devices

GSTIN No.: 06AAVPW8746Q1Z6,  
PAN No.: AAVPW8746Q  
TIN No.: 06821328889,  
TAN no.: RTKKO3359G  
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1  
PAN No.: AAECK2831L  
TIN No.: 06824000112  
CIN No.: U31903HR2011PTC042508  
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

## PLEASE NOTE

This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. **We always recommend OSHA SAFETY LOCK TAG PADLOCK** which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.

We strictly do not prefer this type of locks for the safety isolation purpose. The recommendation will always be for **OSHA SAFETY LOCK TAG PADLOCK** to meet the OSHA requirement.

**KRM LOTO – ABS JACKET PADLOCK****Index Page No:-3**

SR.NO	KRM LOTO PART CODE	PRODUCT NAME	WEIGHT (kg)	TECHNICAL PAGE NO.
1	KRM-K-PDLS-CR	KRM LOTO SAFETY LOCKOUT MOULDED INSULATED BODY PADLOCK	0.060	4-5
2	KRM-K-PDLS-FCR+KR	Safety Lockout PADLOCK with fully insulated material on body	0.070	4-5
3	KRM-K-MJP-L	Metal Jacket Padlock - Long Shackle	0.140	6-7
4	KRM-K-MJP-S	Metal Jacket Padlock - Short Shackle	0.125	6-7
5	KRM-K-JPL-PD-LS	Long Shackle lockout padlock	0.140	8-9
6	KRM-K-JPL-PD-RS	Padlock - Regular shackle with De -electric ABS body	0.125	8-9
7	KRM-K-SSLP	Sleek Padlock - Brass body with ABS cover	0.046	10-11
8	KRM-K-PSPL	Isolation sleek padlock with Dielectric ABS cover	0.080	10-11
9	KRM-K-LPS	KRM LOTO – BRASS SAFETY PADLOCK – WITH BRASS SHACKLE	0.070	12-13
11	KRM-K-PDJW-S	KRM LOTO – BRASS SAFETY PADLOCK – WITH BRASS SHACKLE	0.020	12-13
12	KRM-K-RSIP-CC	KRM LOTO ROUND SAFETY ISOLATION PADLOCK	0.400	14-15



OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



www.locktagindia.com



**KRM LOTO SAFETY LOCKOUT MOULDED INSULATED BODY PADLOCK**

- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- Padlock with fully molded material on body height.
- Key with remain / stand in padlock in unlock condition - never fall down.
- Can make customized danger labels having company logo & name, department name& numbering at require place in different colors.
- Available with 1 key ring / key chain.
- **Weight** - 150 gm.




**KRM-K-PDLS-CR**



**KRM-K-PDLS-FCR+KR**



KRM LOTO  
 EXPERT

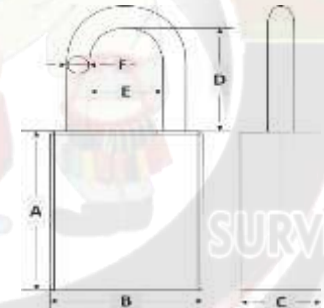

ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BDOY DEPTH (C.)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-PDLS-CR	26 mm	32 mm	13 mm	22 mm	14.5 mm	5 mm
KRM-K-PDLS-FCR+KR	26 mm	33 mm	13 mm	22 mm	14.5 mm	5 mm



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



**LOCKOUT/TAGOUT**



**SAFETY LOCKOUT MOULDED INSULATED BODY PADLOCK**

CE Certified

A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.

- Padlock with fully moulded material on body height.
- Key with remain / stand in padlock in unlock condition - never fell down.
- Can make customized danger labels having company logo & name, department name & numbering at require place in different colors.
- Available with 1 key ring / key chain.
- Weight - 150 gms.



**KRM-K-PDLS-CR**



**KRM-K-PDLS-FCR+KR**



ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH(C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-PDLS-FCR+KR	26mm	32mm	13mm	22mm	14.5mm	5mm
KRM-K-PDLS-CR	26mm	32mm	13mm	22mm	14.5mm	5mm



OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



**KRM LOTO METAL JACKET PADLOCK**


- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- Padlock made of metal body.
- Clipped with insulated cover made from ABS material.
- **Size of Padlock** – As described in the table below.
- Available with 1 key ring / key chain.
- Key chain is available on request. It is additional part of the lock.
- Note: - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.
- We are transparent about the products and they are strictly not preferred for the safety isolation purpose
- **Weight** – 120gm for regular shackle & 140gm for long shackle.



**KRM-K-MJP-L**



**KRM-K-MJP-S**

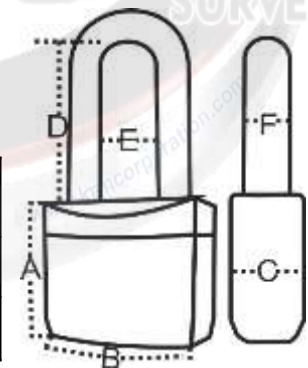

ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-MJP-L	40 mm	42 mm	19 mm	45-55 mm	20 mm	6 mm
KRM-K-MJP-S	34 mm	35 mm	16 mm	15 mm	20 mm	4 mm



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.locktagindia.com




**LOCKOUT/TAGOUT**



**METAL JACKET PADLOCK**

KRM LOTO EXPERT  
CE Certified



A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.

- Padlock made of metal body.
- Clipped with insulated cover made from ABS material.
- **Size of Padlock** – As described in the table below.
- Available with 1 key ring / key chain.
- Key chain is available on request. It is additional part of the lock.

**Note:** - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher. We are transparent about the products and they are strictly not preferred for the safety isolation purpose

- **Weight** – 120gm for regular shackle & 140gm for long shackle.



KRM-K-MJP-S



KRM-K-MJP-L

ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH(C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-MJP-L	40mm	42mm	19mm	45-55mm	20mm	6mm
KRM-K-MJP-S	34mm	35mm	16mm	15mm	20mm	4mm



OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



## KRM LOTO LOCKOUT PADLOCK – LONG & REGULAR SHACKLE


- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- Padlock made of metal body. Clipped with insulated body made from ABS Material.
- **Size of Padlock** - Body width at center 42 mm and height 40 mm. Thickness at center 19 mm at bottom.
- Shackle dimension in closed position - Width 20 mm and Height - 45 to 50 mm - vary.
- With printed danger label in different colors. Available with 1/2/3 key rings/key chains
- **Note:** - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.
- We are transparent about the products and they are strictly not preferred for the safety isolation purpose.
- **Weight** – 120gm for regular shackle & 140gm for long shackle.



**KRM-K-JPL-PD-LS**



**KRM-K-JPL-PD-RS**

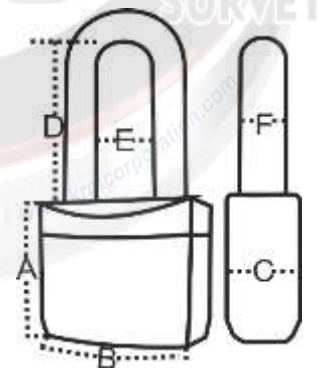

ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-JPL-PD-LS	40 mm	42 mm	19 mm	45-55 mm	20 mm	6 mm
KRM-K-JPL-PD-RS	34 mm	35 mm	16 mm	15 mm	20 mm	4 mm





OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



**LOCKOUT/TAGOUT**




**LOCKOUT PADLOCK – LONG & REGULAR SHACKLE**

CE Certified

A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.

- Padlock made of metal body. Clipped with insulated body made from ABS Material.
- Size of Padlock - Body width at center 42 mm and height 40 mm.
- Thickness at center 19 mm at bottom.
- Shackle dimension in closed position - Width 20 mm and Height - 45 to 50 mm - vary.
- With printed danger label in different colors. Available with 1/2/3 key rings/key chains
- Note: - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.
- We are transparent about the products and they are strictly not preferred for the safety isolation purpose.
- Weight – 120gm for regular shackle & 140gm for long shackle.



KRM-K-JPL-PD-RS



KRM-K-JPL-PD-LS

ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH(C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-JPL-PD-LS	40mm	42mm	19mm	45-55mm	20mm	6mm
KRM-K-JPL-PD-RS	34mm	35mm	16mm	15mm	20mm	4mm



OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269



www.lotoappliances.com



**KRM LOTO SMALL SHACKLE FINISH PADLOCK**


- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- Padlock made of metal body. Clipped with insulated body made from ABS material.
- Can make customized danger labels having company logo & name, department name & numbering at require place in different colors.
- Available with 1/2/3 key ring / key chain. Available in all colors.
- **Note:** - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.
- We are transparent about the products and they are strictly not preferred for the safety isolation purpose



**KRM-K-SSLP**



**KRM-K-PSPL**

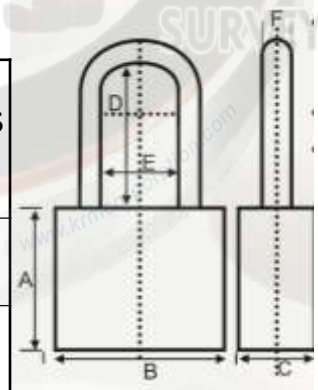

ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-PSPL	34 mm	35 mm	16 mm	15 mm	20 mm	4 mm
KRM-K-SSLP	25 mm	34 mm	12 mm	25 mm	20 mm	4 mm



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147 & 1910.269



www.lotoappliances.com



**LOCKOUT/TAGOUT**



**SMALL SHACKLE FINISH PADLOCK**

CE Certified

A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with **LATEST LOCKING MECHANISM** used to lock the different devices.

- Padlock made of metal body. Clipped with insulated body made from ABS material.
- Can make customized danger labels having company logo & name, department name & numbering at require place in different colors.
- Available with 1/2/3 key ring / key chain. Available in all colors.

**Note:** - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.

We are transparent about the products and they are strictly not preferred for the safety isolation purpose



KRM-K-PSPL



KRM-K-SSLP

ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH(C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-PSPL	34mm	35mm	16mm	15mm	20mm	4 mm
KRM-K-SSLP	25mm	34mm	12mm	25mm	20mm	4 mm





OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.locktagindia.com



**LOCKOUT/TAGOUT**



**BRASS PADLOCK WITH PRINTED LABEL**



- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- Padlock made of brass finish body.
- Clipped with insulated cover made from ABS material.
- Size of Padlock – As described in the table below.
- Available with 1 key ring / key chain.
- Key chain is available on request. It is additional part of the lock.
- Note: - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.
- We are transparent about the products and they are strictly not preferred for the safety isolation purpose



KRM-K-PDJW-S



KRM-K-LPS

BODY HEIGHT	BODY WIDTH	BODY DEPTH	SHACKLE HEIGHT	SHACKLE WIDTH	SHACKLE THICKNESS
16mm	20mm	5mm	12mm	11mm	2.5mm
22mm	32mm	7mm	17mm	16mm	4mm



OEM Manufacturer & Global Supplier of  
 Lockout Tagout & Safety Products

to meet  
 OSHA'S Lockout Tagout Standard  
 29 CFR, 1910.147&1910.269




**KRM LOTO ROUND SAFETY ISOLATION PADLOCK**

- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing.
- Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- Round Lock with 6 lever Brass cylinder. Having short shackle with insulated ABS cover. Can make customized danger labels having company logo & name, department name & numbering at require place in different colors. With differ, same and master key.
- Available with 1/2/3 key rings / key chains
- Note: - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.
- We are transparent about the products and they are strictly not preferred for the safety isolation purpose.



**KRM-K-RSIP-ABSC**

**KRM-K-RSIP-CC**



ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-RSIP-ABSC	42 mm	42 mm	22mm	15 mm	20 mm	4 mm
KRM-K-RSIP-CC	42 mm	42 mm	22 mm	31 mm	20 mm	5 mm

GSTIN No.: 06AAVPW8746Q1Z6,  
PAN No.: AAVPW8746Q  
TIN No.: 06821328889,  
TAN no.: RTKKO3359G  
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1  
PAN No.: AAECK2831L  
TIN No.: 06824000112  
CIN No.: U31903HR2011PTC042508  
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

## LOCKOUT/TAGOUT



KRM-K-RSIP-ABSC



## ROUND SAFETY ISOLATION PADLOCK

CE  
Certified

- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing.
- Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- Round Lock with 6 lever Brass cylinder. Having short shackle with insulated ABS cover. Can make customized danger labels having company logo & name, department name & numbering at require place in different colors. With differ, same and master key.
- Available with 1/2/3 key rings / key chains
- Note: - This lock is a metal lock clipped with ABS cover, they are not safety padlock as not for the purpose of safety. We always recommend OSHA SAFETY LOCK TAG PADLOCK which are available in our website in other padlock segment. Chances of interchanging of the key in these type of locks are higher.
- We are transparent about the products and they are strictly not preferred for the safety isolation purpose.

ITEM CODE	BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH(C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
KRM-K-RSIP-ABSC	42mm	42mm	22mm	15mm	20mm	4mm
KRM-K-RSIP-CC	42mm	42mm	22mm	31mm	20mm	5mm

Postal Add: 615, Sector-15A, Faridabad-121007  
Regd. Office: 1H/31A, N.I.T. Faridabad-121001 Haryana - NCR (INDIA)

www.krmloto.com www.krmcorporation.com, www.safetyloto.com  
www.lotoappliances.com, www.lockouttagouts.com

GSTIN No.: 06AAVPW8746Q1Z6,  
PAN No.: AAVPW8746Q  
TIN No.: 06821328889,  
TAN no.: RTKKO3359G  
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1  
PAN No.: AAECK2831L  
TIN No.: 06824000112  
CIN No.: U31903HR2011PTC042508  
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

[www.krmcorporation.com](http://www.krmcorporation.com) | [www.lockouttagouts.com](http://www.lockouttagouts.com) | [www.krmloto.com](http://www.krmloto.com) | [www.locktagindia.com](http://www.locktagindia.com) | [www.lotoappliances.com](http://www.lotoappliances.com)

## DRAWBACK OF ABS JACKETED METAL PADLOCK:

- KEY NOT RETAINED in this Lock—not recommended to any one for full proof isolation work for safety .
- Possibility for key interchanging is also on higher side.
- That lock was metal body and cover with ABS clipping with spring/ ball cylinder which not hold key in unlock Position.
- Non resistance to electric current, so not recommendable for the high voltage area.
- No specific key arrangement for locking mechanism.

**WE ALWAYS RECOMMEND OSHA SAFETY LOCK TAG PADLOCK INSPITE OF ABS JACKETED PADLOCK**