

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

KRM LOTO – OSHA SAFETY ADJUSTABLE CABLE PADLOCK

- **Body material** : ABS
- **Body size-** $\pm 67\text{mm} \times 47.7\text{mm} \times 18\text{mm}$
- **Cable length** : 1 Mtr./2 Mtr.
- **Cable Thickness Size** : $\pm 4\text{mm}$
- **Cable Shackle Material** – High quality corrosion resistant with insulated Steel cable.

Instructions for use

- Pull the cable through the hole from above to the required length to locking
- The warning tag can be tied to the cable.
- **Unlocking** :
- Turn the key to the unlocking state. Push the operation key, and the cable can move up and down at will.

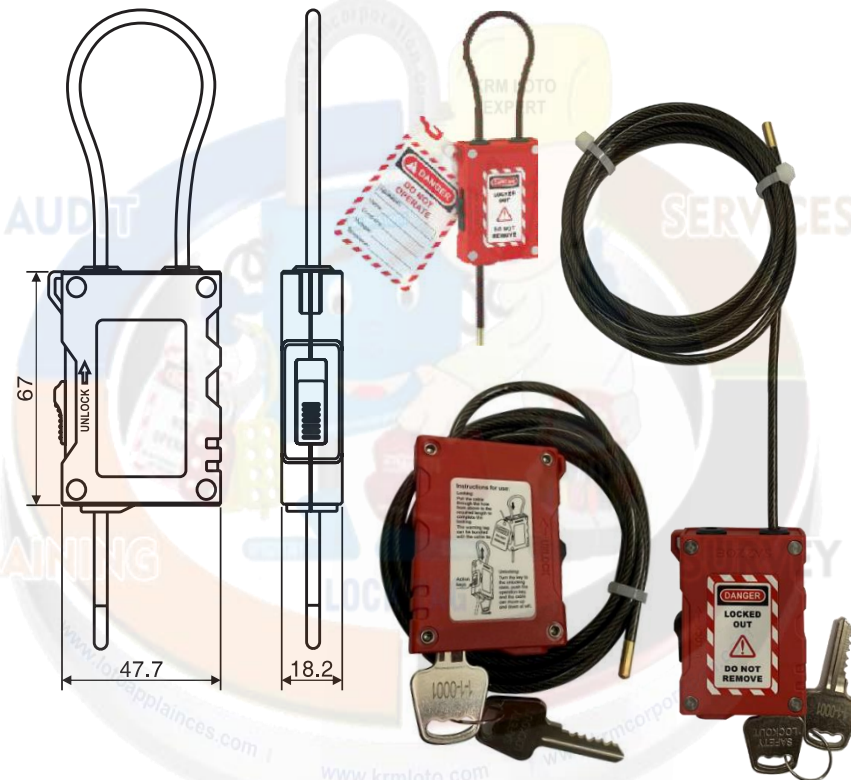

KRM-K-OSACP-1



KRM LOTO – LOCKOUT SAFETY ADJUSTABLE CABLE PADLOCK

- **Body material** : ABS
- **Body size-** $\pm 61.80\text{mm} \times 41.62\text{mm} \times 21.10\text{mm}$
- **Cable length** : 1 Mtr.
- **Cable Thickness Size** : $\pm 4\text{mm}$
- **Cable Shackle Material** – High quality corrosion resistant with insulated Steel cable.

Instructions for use

- Insert the key to open the lock
- Padlock the black part inward
- The cable goes through the hole adjust the length.
- Press the button the black part will pop up.
- Lockout pull out the key.




KRM-K-OSACP




KRM LOTO - CABLE SAFETY PADLOCK INSULATED STEEL SHACKLE 600MM LENGTH

- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- KRM LOTO SAFETY PADLOCK---- "Seamless" lock structure durability - key system: DIFFER KEY, MASTER KEY. The new management key technology, - 10 level management.
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title 29 Code of Federal Regulations(CFR)Part 1910.147
- Key retaining ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID indicating the corresponding padlock for easy management.
- KEY SYSTEM - Differ Key, Master Key
- **Body Material** - Glass fiber reinforced nylon / (Composition of ABS + Nylon).
- **Cable Shackle Material** – High quality corrosion resistant with insulated Steel cable.
- **Length of Cable** – 600mm in unlock position and 300mm in lock position
- **Color** - Red, Blue, Green, Yellow.
- **Weight** – 100gm



KRM-K-CASPL-P



BODY HEIGHT (A)	BODY WIDTH(B)	BODY DEPTH(C)	CABLE SHACKLE LENGTH IN LOCK POSITION (D)	SHACKLE WIDTH (E)	CABLE SHACKLE THICKNESS(F)
45 mm	40 mm	20 mm	300mm	20 mm	4-4.5mm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269




www.lotoappliances.com



KRM LOTO - SAFETY PADLOCK WITH STEEL CABLE

- A Padlock is a detachable lock passed by an opening with U Shaped shackle used to protect against unauthorized or unwanted stealing. Provided with LATEST LOCKING MECHANISM used to lock the different devices.
- KRM LOTO SAFETY PADLOCK---- "Seamless" lock structure durability - key system: DIFFER KEY, ALIKE KEY, MASTER & DIFFER KEY. The new management key technology, - 10 level management.
- To meet OSHA standard for The Control of Hazardous Energy (Lockout/Tagout), Title 29 Code of Federal Regulations(CFR)Part 1910.147
- High quality with waterproof, corrosion resistant and strong adhesive..
- Key retaining ensures that padlock is not left unlocked.
- Configuration key card, easy to know personal ID indicating the corresponding padlock for easy management.
- KEY SYSTEM - **Alike Key, Master & Differ Key, Differ Key. – on request**
- **Body Material** - Glass fiber reinforced nylon / (Composition of ABS + Nylon).
- **Shackle Material** – Steel Finish Cable.
- **Color** - Red, Blue, Green, Yellow, Orange, White, Brown, Black, Purple.
- Work temperature 0o - 250o F (-20o - 120o C)
- **Weight** – 100gm



BODY HEIGHT (A)	BODY WIDTH(B)	BODY DEPTH (C)	CABLE SHACKLE LENGTH IN LOCK POSITION (D)	SHACKLE WIDTH (E)	CABLE SHACKLE THICKNESS (F)
45 mm	40 mm	20 mm	150mm	20 mm	3 mm

KRM-K-CASPL-C

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com

www.lockouttagouts.com

www.krmloto.com

www.locktagindia.com

www.lotoappliances.com



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

KRM LOTO – GUN LOCK PADLOCK

- Padlock body made from metal and plastic.
- Metal Cable is armored with plastic.
- **Body material** – Steel covered with plastic
- **Shackle Material** – Metal shackle covered with plastic
- **Key system** – DIFFER KEY, ALIKE KEY,
- 2 Keys With Each Lock
- Both Cable & Lock Vinyl Wrapped For Excellent Protection Against Unwanted Damage To Firearm
- Rubber coating on the cable will prevent your firearm from getting scratched.
- **Overall Cable Length** – up to 300mm
- **Color** – Red, Black
- **Weight** – 120gm



KRM-K-GLP

BODY HEIGHT	BODY WIDTH	BODY DEPTH	OVERALL CABLE LENGTH	CABLE THICKNESS
30 mm	34 mm	20 mm	±300mm	4mm