

These signs indicate that a particular course of action must be undertaken.



5034 C,E



5171 C,E



5078 C,E



5029 C,E



5146 C,E



5074 C,E



5149 C,E



5107 C,E



5108 C,E



5094 C.E



5087 C.E



5049 C.E



5039 C,E



5091 C,E



5300 C,E



5301 C,E



5117 C, E



5302 C,E



5303 C,E



5304 C,E



5305 C,E



5306 C,E



5307 C,E



5308 C,E



5035 D, F



5036 D, F



5170 D, F



must be worn
5175 D, F



5045 D, F



5058 D, F



5020 D, F



5022 D, F



5145 D, F



5025 D, F



5026 D, F



Guards must be in position before starting

5180 D, F



5184 D, F



5155 D, F



5130 D, F



5037 D, F



5038 D, F



Ear protection area

5041 D, F

Telefax: 0129-4081 381 M: 00 98102 91381 e-mail info@krmcorporation.com, krm@krmcorporation.com

NOTE



C=6"x6" D=6"x8" E=8"x8" F=8"x10"

MATERIAL

Glowin-thedark

Self Adhesive Vinyl

PVC Rigid Sheet 0.7mm to 3 mm

Processed hard Aluminum Sheet (1mm)







Blue

Colour code

SIZE D=6"x8"

F=8"x10"

MATERIAL

Glowin-the-dark

Adhesive

(V)inyl

PVC

R igid Sheet

0.7mm to 3 mm Processed hard

A luminum)Sheet (1mm)



5042 D, F



5043 D, F



5044 D, F



5046 D, F



Use guards





5138 D, F







nust be worn

5053 D, F



5051 D, F



5052 D, F



5055 D, F



5056 D, F



5057 D, F



5059 D, F



5263 D, F



must be worn 5160 D, F



Wear helmet

5040 D, F





5269 D, F 5270 D, F



This is a hard hat area

5271 D, F



5272 D, F



antistatic footwear

5090 D, F



harness (belt) 5330 D, F





5341 D, F 5351 D, F



5361 D, F



5371 D, F



5381 D, F



Lifejackets must be worn

5391 D, F



seat belts

5400 D, F



Fire door keep locked

5411 D 🕞



5461 D, F



5462 D, F



5100 D, F



5127 D, F



5128 D, F





7704 D, F


















Telefax: 0129-4081 381 M: 00 98102 91381








Colour code - Blue

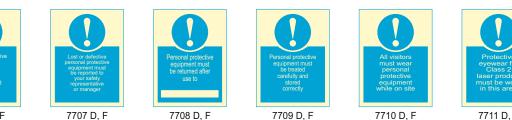



7712 D, F







7715 D, F













C=6"x6" D=6"x8" E=8"x8" F=8"x10"

MATERIAL

Glowin-the-dark

Self Adhesive (V)inyl

PVC Rigid Sheet 0.7mm to 3 mm

Processed hard **A** luminum)Sheet (1mm)

Telefax: 0129-4081 381 M: 00 98102 91381

KEEP CLEAR

5057 H, PT

e-mail

C=6"x6"

E=8"x8"

KEEP CLEAR

5181 H, PT


A=4"x4"



Colour code - Blue



8800 F, Z



8801 F, Z



8802 F, Z




8803 F, Z




8804 F, Z



8805 F(Z)



8841 Z

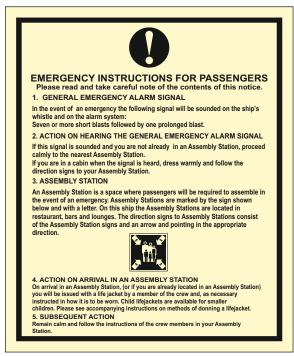

8881 Z

SIZE

C=6"x6" D=6"x8" E=8"x8" F=8"x10"

MATERIAL

Glowin-thedark

Self Adhesive (V)inyl

> PVC Rigid Sheet 0.7mm to 3 mm

Processed hard A luminum Sheet (1mm)

Telefax: 0129-4081 381 M: 00 98102 91381





Ω

Colour code



On discovery of a fire:

- Operate nearest fire alarm.
 Leave the building by the nearest available exit.
 Report to the assembly point.

On hearing the alarm:

Remember:

The lift must not be used. The nearest assembly point is:

FIRE ACTION Any person discovering a fire: Spread the alarm
 Call the fire brigade
 Attack the fire N possible using the appliance provided. On hearing the fire alarm: Remember: The nearest assembly point is:
The telephone number for fire is: __Close all doors behind you. O NOT take risks or return to the any reason until authorised to do

FIRE ACTION Raise the alarm
Leave the building by the nearest available exit.
Report to the assembly point. On hearing the fire alarm: 0

FIRE ACTION On discovering a fire: Wait unitl the address has been repeated by the fire brigade before

On hearing the alarm:

These premises

do not have a telephone. In the event of an emergency, take this card to the nearest

telephone, which is at:-

Read the following information

to the emergency operator, adding the service you require.

Return to this building and await

8853 F(Z)

Call the fire brigade immediately to every fire or on suspicion of a fire

5015 D, F 5048 D, F 5114 D, F 5028 D. F



8851 F, Z



Emergency action

Instructions to be given out over the public address system by the operator on receiving information of a fire or other emergency situation.

In the event of an emergency, read this message over the public address system:

Attention please This is an emergency announcement. Evacuate the building by the nearest unaffected exit immediately.

Do not stop to collect personal Do not run.

Do not use lifts

not run. not use lifts. oceed to assembly point.

the arrival of the emergency service.



Fire action

- 1 Remain calm
- 2 Wait here until assistance
- 3 Stay in this special safe refuge.
- You must not leave until told that it is safe to do so by the fire or evacuation officer.

This refuge give protection against fire and smoke. The rehearsed plan for your safe evacuation has been put into action immediately the fire alarm was sounded. Help will alarm shortly.

Please do not smoke

8852 F, Z

Fire action

- 1 Raise the alarm
- 2 Ensure the holiday home is evacuated.
- 3 Call the fire brigade. The nearest telephone is

4 If practicable, attack the fire.

8855 F. Z

SIZE

C=6"x6" D=6"x8" E=8"x8"

F=8"x10" MATERIAL

> Glowdark

Self Adhesive (V)inyl

PVC Rigid Sheet 0.7mm to

3 mm

Processed hard **A** luminum Sheet

(1mm)

8854 F. Z

Fire action

- Call Fire Brigade immediately.
- Proceed to nearest available exit.
- Do not return to your vehicle

8900 D, F

D=6"x8" F=8"x10" **Personal Protective Equipment** at Work Regulations 1992

Personal protective equipment is provided for your health and safety and must be used.

Defective equipment should be immediately reported to your safety representative.

8931 D, F

Telefax: 0129-4081 381 M: 00 98102 91381



NOTE

Colour code - Blue

These goggles are for use with this grinder only

Not to be taken away

8951 D, F



Fire prevention Please remove plug

Please remove plug from socket when not in use

8981 D, F



Escalator safety

- 1. Stand facing the direction of travel.
- 2. Hold the handrail.
- 3. Keep feet away from sides.
- 4. Small children must be held firmly.
- 5. Dogs must be carried.

8910 D, F

Construction site

Keep out

8920 D, F



Permit to work

All contractors

must obtain

a valid permit

to work

on this site

8925 D, F

All drivers and visitors must report to site office

8940 D, F

Reversing prohibited unless under direction

8945 D, F

SIZE

C=6"x6" D=6"x8" E=8"x8" F=8"x10"

MATERIAL

Glowin-thedark

Self Adhesive (V)inyl

PVC Rigid Sheet 0.7mm to 3 mm

Processed hard A luminum Sheet (1mm)



Telefax: 0129-4081 381 M: 00 98102 91381 e-mail