



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO DI ELECTRIC LOCKOUT HASP

KRM LOTO
EXPERT



KRM-K-NH4



KRM-K-NH8



KRM Corporation
Lockout Tagout



KRM Corporation
Electrical Safety
Products



KRM Corporation
TRAINING





KRM **Lock Tag!**
OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products
to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



KRM Safetech Private Limited
QUALITY MANAGEMENT SYSTEM ISO 9001:2015
GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

Telefax: 00 91 129 4021 381, 413 1381 (D)

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO DI ELECTRIC LOCKOUT HASP



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Productsto meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lockouttagouts.com

Email: info@krmlo.com, info@krmcorporation.com, krmlo@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmlo.com | www.locktagindia.com | www.lotoappliances.com

**KRM LOTO – SAFETY LOCKOUT HASP DI-ELECTRIC- INDEX****Index Page No:-3**

SR.NO	KRM LOTO PART CODE	PRODUCT NAME	WEIGHT (kg)	TECHNICAL PAGE NO.
1	KRM-K-NH 4	Di-electric Multi Device HASP with 4 holes	0..015	5-6
2	KRM-K-NH 8	Di-electric Multi Device HASP with 8 holes	0.025	7-8
3	KRM-K-DEH-RB12	KRM LOTO DI ELECTRIC LOCKOUT HASP WITH 12 HOLES	0..05	9-10
4	KRM-K-DEH-YB12	KRM LOTO DI ELECTRIC LOCKOUT HASP WITH 12 HOLES	0.05	9-10
5	KRM-K-DEH-64	DIELECTRIC HASP WITH 6 HOLES	0.03	11-12
6	KRM-K-DEH-33	KRM LOTO NON CONDUCTIVE HASP WITH 4 HOLES SHACKLE THICKNESS 3 MM	0.05	13-14
7	KRM-K-DEH-43	Non Conductive Hasp with 4 holes Shackle thickness 4 mm	0.05	15-16
8	KRM-K-DEH-63	Non Conductive Hasp with 4 holes Shackle thickness 6 mm	0.055	17-18
9	KRM-K-DJCH-8	HASP WITH DOUBLE JAW WITH 8 HOLES - RED	0.025	19-20
10	KRM-K-DPMLD	Di Electric Multipurpose Hasp	0.08	21-22



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO – SAFETY LOCKOUT HASP DI-ELECTRIC- INDEX

Index Page No:-4

11	KRM-K-EDLLH	KRM LOTO ECONOMY DI - ELECTRIC LABELED LOCKOUT HASP	KRM LOTO EXPERT 0.07	23-24
12	KRM-K-DEH-ST	DI ELECTRIC HASP HAVING PROVISION TO PUT FOR MULTIPLE LOCKS	0.055	25-26





OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.locktagindia.com



KRM LOTO DI ELECTRIC LOCKOUT NYLON HASP 4 HOLE

- KRM LOTO Multi Device Hasp made of strong rigid Propylene nylon having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally 4 hole slots to placed padlocks for standardized isolation.
- **Material** – Propylene / Nylon
- **Dimension** – Height 133mm, shackle Height 64mm, Width – 31mm hole Diameter 9mm
- **Weight** – 10 gm
- **Color** – Red, Yellow, Green and Blue Or any color make as per the required quantity



KRM-K-NH-4



ITEM CODE	OUTER LENGTH (A)	JAW SIZE DIA (B)	PADLOCK HOLE DIA(C)	WIDTH(D)	NO OF HOLES	WEIGHT
KRM-K-NH-4	133 mm	64 mm	09mm	31mm	4	10 gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT




DI ELECTRIC MULTI DEVICE LOCKOUT HASP

CE Certified



KRM-K-NH4

- KRM LOTO Multi Device Hasp made of strong rigid Propylene nylon having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally 4 hole slots to placed padlocks for standardized isolation.
- **Material** – Propylene / Nylon
- **Dimension** – Height 133mm, shackle Height 64mm, Width – 31mm hole Diameter 9mm
- **Weight** – 10gm
- **Color** – Red, Yellow, Green and Blue Or any color make as per the required quantity

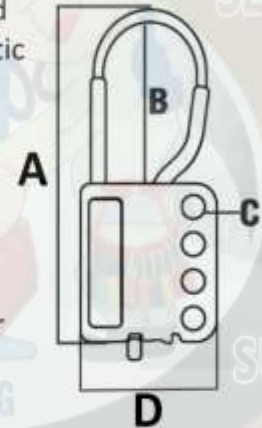

Item Code	HEIGHT (A)	Jaw Dia Size (B)	Padlock HoleDia (C)	Width (D)	No.Of Holes	Weight
KRM-K-NH4	133mm	64mm	09mm	31mm	4	10gm

GSTIN No.: 06AAPPW8746Q126,
PAN No.: AAPPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lotoappliances.com



Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA



GSTIN No.: 06AAECK2831L1ZI
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)


www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO DI ELECTRIC LOCKOUT NYLON HASP 8 HOLE

- KRM LOTO Multi Device Hasp made of strong rigid Propylene nylon having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally 8 hole slots to placed padlocks for standardized isolation.
- **Material** – Propylene / Nylon
- **Dimension** – Height 133mm, shackle Height 64mm,
- Width – 53mm hole Diameter 9mm
- **Weight** – 20 gm
- **Color** – Red, Yellow, Green and Blue Or any color make as per the required quantity



KRM-K-NH-8

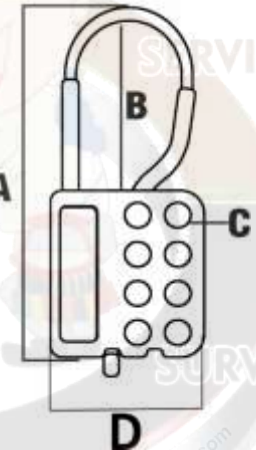

ITEM CODE	OUTER LENGTH (A)	JAW SIZE DIA (B)	PADLOCK HOLE DIA(C)	WIDTH(D)	NO OF HOLES	WEIGHT
KRM-K-NH-8	133	64	09mm	53mm	8	20



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



LOCKOUT/TAGOUT



DI ELECTRIC MULTI DEVICE LOCKOUT HASP


KRM LOTO
EXPERT

CE
Certified



KRM-K-NH8

- KRM LOTO Multi Device Hasp made of strong rigid Propylene nylon having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally 8 hole slots to placed padlocks for standardized isolation.
- **Material** – Propylene / Nylon
- **Dimension** – Height 133mm, shackle Height 64mm, Width – 53mm hole Diameter 9mm
- **Weight** – 20gm
- **Color** – Red, Yellow, Green and Blue Or any color make as per the required quantity

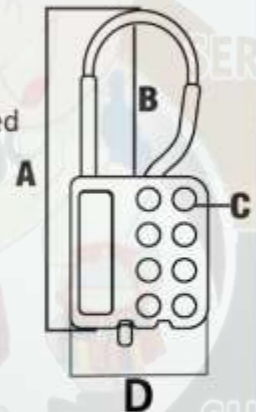

Item Code	HEIGHT (A)	Jaw Dia Size (B)	Padlock HoleDia (C)	Width (D)	No.Of Holes	Weight
KRM-K-NH8	133mm	64mm	09mm	53mm	8	20gm

GSTIN No.: 06AAMPW8746Q126,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO DI ELECTRIC LOCKOUT HASP WITH 12 HOLES

- KRM LOTO Multi Device Hasp's body is in two parts made of strong rigid ABS / Nylon having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally **12 holes** to placed padlocks for standardized isolation.
- Material** – ABS / Nylon
- Weight** – 30 gm
- Color** – Red/ black , Yellow / black Or Customized per the required quantity



KRM-K-DEH-YB12 KRM-K-DEH-RB12

SURVEY

Item code	BODY HEIGHT	BODY WIDTH	HOLE DIA	NO OF HOLES	CLOSE HEIGHT	THICKNESS OF SHACKLE	OVERALL HEIGHT	SHACKLE WIDTH IN CLOSE POSTION	SHACKLE HEIGHT IN CLOSED POSTION.	Weight
KRM-K-DEH-RB12 KRM-K-DEH-YB12	78MM	55MM	7.5M	12	49MM	5MM	132MM	30MM	39MM	30GM



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



LOCKOUT/TAGOUT



DI ELECTRIC LOCKOUT HASP WITH 12 HOLES



- KRM LOTO Multi Device Hasp's body is in two parts made of strong rigid ABS / Nylon having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally **12 holes** to placed padlocks for standardized isolation.
- **Material** – ABS / Nylon
- **Weight** – 30 gm
- **Color** – Red/ black , Yellow / black Or Customized per the required quantity

Item Code	BODY HEIGHT	BODY WIDTH	HOLE DIA	NO OF HOLES	CLOSE HEIGHT	THICKNESS OF SHACKLE	OVERALL HEIGHT	SHACKLE WIDTH IN CLOSE POSITION	SHACKLE HEIGHT IN CLOSED POSITION	Weight
KRM-K-DEH-RB12	78MM	55MM	7.5MM	12	49MM	5MM	132MM	30MM	39MM	30GM
KRM-K-DEH-YB12										



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269




www.lotoappliances.com



KRM LOTO DI ELECTRIC LOCKOUT HASP WITH 6 HOLES

LOCKOUT/TAGOUT

- KRM LOTO Multi Device Hasp's body is in two parts made of strong rigid ABS /Propylene having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field.
- Having totally 6 holes to placed padlocks for standardized isolation.
- Material –ABS/Polypropylene
- Dimension – Height 175 mm, shackle height 80 mm, hole Diameter 09 mm
- Weight – 20 gm with 6 holes
- Color – Red, Yellow, Green and Blue Or any color make as per the required quantity

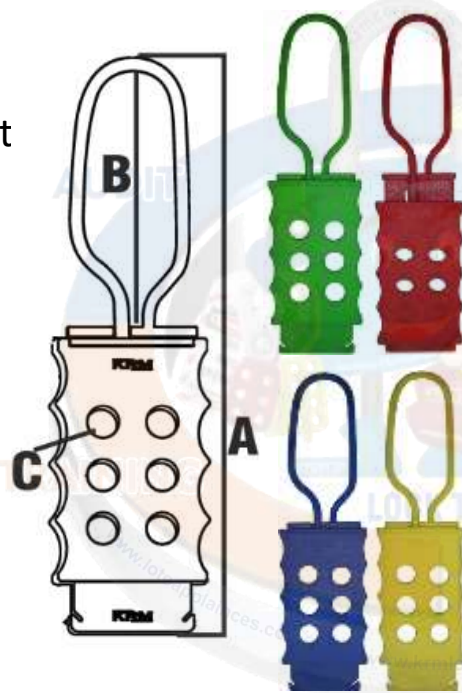

KRM-K-DEH-64

ITEM CODE	OUTER LENGTH (A)	JAW SIZE DIA (B)	PADLOCK HOLE DIA (C)	NO OF HOLES	WEIGHT
KRM-K-DEH-64	175 mm	80 mm	09mm	6	20 gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT



DI-ELECTRIC LOCKOUT HASP 6 HOLES

CE Certified



KRM-K-DEH-64

- KRM LOTO Multi Device Hasp's body is in two parts made of strong rigid ABS /Propylene having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally 6 holes to placed padlocks for standardized isolation.
- **Material** –ABS/Polypropylene
- **Dimension** – Height 175 mm, shackle height 80 mm, hole Diameter 09 mm
- **Weight** – 20 gm with 6 holes
- **Color** – Red, Yellow, Green and Blue Or any color make as per the required quantity




Item Code	Outer Height (A)	Jaw Size Dia (B)	Padlock Hole Dia (C)	No.Of Holes	Weight
KRM-K-DEH-64	175mm	80mm	09mm	6	20gm



KRM LOTO NON CONDUCTIVE HASP WITH 4 HOLES SHACKLE THICKNESS 3MM

- KRM Di-electric slider Hasp's body is in three parts made of strong rigid plastic having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally four holes to placed padlocks for standardized isolation.
- **Material** – ABS/Nylon
- **Dimension** – height 65 mm, width 62 mm (Top and Bottom), shackle thickness is 3mm for thick and thin shackle width 55 mm.
- **Weight** – 30 gm for thin shackle with 4 holes
- **Color** – Yellow body with black shackle, Yellow body with black & red shackle Or any color make as per the required quantity

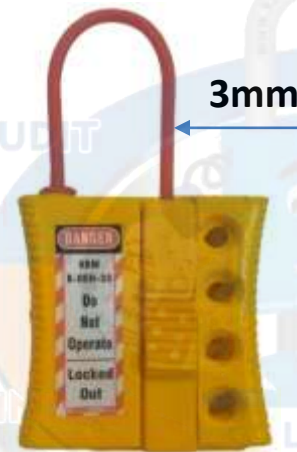**KRM-K-DEH-33**

ITEM CODE	HEIGHT	SHACKLE THICKNESS	PADLOCK HOLE DIA	NO OF HOLES	WEIGHT
KRM-K-DEH-33	65 mm	03 mm	7.5mm	04	30 gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



LOCKOUT/TAGOUT



**NON CONDUCTIVE LOCKOUT HASP WITH 4 HOLES
SHACKLE THICKNESS 3 MM**

CE
Certified



3 MM THICK

- KRM Di-electric slider Hasp's body is in three parts made of strong rigid plastic having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally four holes to placed padlocks for standardize isolation.
- **Material** – ABS/Nylon
- **Dimension** – Height 65mm, Width 62mm (Top and Bottom), Shackle thickness is 3mm and Shackle Height 46mm Shackle Width 23mm
- **Weight** – 30 gm for thin shackle with 4 holes
- **Color** – Yellow body with black shackle, Yellow body with black & red shackle Or any color make as per the required quantity



KRM-K-DEH-33

Item Code	Height (A)	Width (B)	Shackle Height (C)	Shackle Width (D)	Shackle Thickness (E)	Hole Dia (F)	Weight
KRM-K-DEH-33	65mm	62mm	46mm	23mm	3mm	7.5mm	30gm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

KRM LOTO NON CONDUCTIVE HASP WITH 4 HOLES SHACKLE THICKNESS 4 MM

- KRM Di-electric slider Hasp's body is in three parts made of strong rigid plastic having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally four hole: to placed padlocks for standardized isolation.
- **Material** – ABS/Nylon
- **Dimension** – height 65 mm, width 62 mm (Top and Bottom), shackle thickness is 4mm for thick and thin shackle width 55 mm.
- **Weight** – 30 gm for thin shackle with 4 holes
- **Color** – Yellow body with black shackle, Yellow body with black & red shackle Or any color make as per the required quantity



KRM-K-DEH-43



ITEM CODE	HEIGHT	SHACKLE THICKNESS	PADLOCK HOLE DIA	NO OF HOLES	WEIGHT
KRM-K-DEH-43	65 mm	04 mm	7.5mm	04	30 gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lootoappliances.com



LOCKOUT/TAGOUT




**NON CONDUCTIVE LOCKOUT HASP WITH 4 HOLES
SHACKLE THICKNESS 4 MM**

CE Certified



- KRM Di-electric slider Hasp's body is in three parts made of strong rigid plastic having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally four holes to placed padlocks for standardized isolation.
- Material – ABS/Nylon
- Dimension – Height 65mm, Width 62mm (Top and Bottom), Shackle thickness is 4mm and Shackle Height 46mm Shackle Width 23mm
- Weight – 30 gm for thick shackle with 4 holes
- Color – Yellow body with black shackle, Yellow body with red shackle Or any color make as per the required quantity

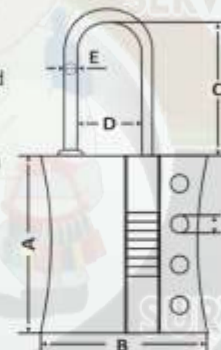

KRM-K-DEH-43

Item Code	Height (A)	Width (B)	Shackle Height (C)	Shackle Width (D)	Shackle Thickness (E)	Hole Dia (F)	Weight
KRM-K-DEH-43	65mm	62mm	46mm	23mm	4mm	7.5mm	30gm

www.krmloto.com



KRM LOTO NON CONDUCTIVE HASP WITH 4 HOLES SHACKLE THICKNESS 6 MM

- KRM Di-electric slider Hasp's body is in three parts made of strong rigid plastic having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally four holes to placed padlocks for standardized isolation.
- **Material** – ABS/Nylon
- **Dimension** – height 65 mm, width 62 mm (Top and Bottom), shackle thickness is 6mm for thick and thin shackle width 55 mm.
- **Weight** – 40 gm for thin shackle with 4 holes
- **Color** – Yellow body with black shackle, Yellow body with red shackle Or any color make as per the required quantity

**KRM-K-DEH-63**

ITEM CODE	HEIGHT	SHACKLE THICKNESS	PADLOCK HOLE DIA	NO OF HOLES	WEIGHT
KRM-K-DEH-63	65 mm	06 mm	7.5mm	04	40 gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147 & 1910.269



www.lotoappliances.com




**NON CONDUCTIVE LOCKOUT HASP WITH 4 HOLES
SHACKLE THICKNESS 6 MM**

CE
Certified



6 MM THICK

- KRM Di-electric slider Hasp's body is in three parts made of strong rigid plastic having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally four holes to placed padlocks for standardized isolation.
- **Material** – ABS/Nylon
- **Dimension** – Height 65mm, Width 62mm (Top and Bottom), Shackle thickness is 6mm and Shackle Height 46mm Shackle Width 23mm
- **Weight** – 40 gm for thick shackle with 4 holes
- **Color** – Yellow body with black shackle, Yellow body with red shackle Or any color make as per the required quantity

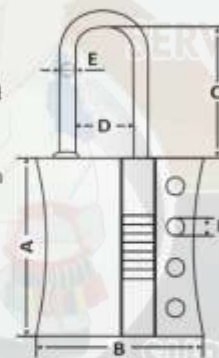

KRM-K-DEH-63

Item Code	Height (A)	Width (B)	Shackle Height (C)	Shackle Width (D)	Shackle Thickness (E)	Hole Dia (F)	Weight
KRM-K-DEH-63	65mm	62mm	46mm	23mm	6mm	7.5mm	40gm

GSTIN No.: 06AACPW8746Q1Z6,
PAN No.: AACPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

KRM LOTO DI ELECTRIC HASP – DOUBLE JAW WITH 8 HOLES

- KRM LOTO Dual Jaw Hasp ensures each worker's safety as the energy cannot be restored until the work is finished utilized to lock electrical devices like plug and cord which is also suitable for keeping equipment inoperative while repairs or adjustments are undertaken.
- **Material** – ABS
- **Size** – Overall length 140 mm, Hasp having two different jaw diameter of 28 mm and 40 mm at both ends with eight small holes for locking having 9 mm of diameter.
- **Weight** – 30 gm
- **Color** – Red Or any color make as per the required quantity



KRM-K-DJCH-8

ITEM CODE	OUTER LENGTH	JAW SIZE DIA	PADLOCK HOLE DIA	NO OF HOLES	WEIGHT
KRM-K-DJCH-8	140 mm	28/40 mm	09mm	8	30 gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA
www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

LOCKOUT/TAGOUT



KRM-K-DJCH-8

DI ELECTRIC LOCKOUT HASP – DOUBLE JAW WITH 8 HOLES

CE Certified

- KRM LOTO Dual Jaw Hasp ensures each worker's safety as the energy cannot be restored until the work is finished utilized to lock electrical devices like plug and cord which is also suitable for keeping equipment inoperative while repairs or adjustments are undertaken.
- **Material** – ABS
- **Dimension** – Height 140 mm, Hasp having two different jaw diameter of 28 mm and 40 mm at both ends with 8 holes for locking having 9 mm of diameter.
- **Weight** – 30 gm
- **Color** – Red, Yellow, Blue, Green Or any color make as per the required quantity

Item Code	Height (A)	Jaw Size Dia (B)	Padlock Hole Dia (C)	No.Of Holes	Weight
KRM-K-DJCH-8	140mm	28/40mm	09mm	8	30gm



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269



www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

DI ELECTRIC MULTIPURPOSE HASP

- **Material** – Both Part ABS
- KRM LOTO Multi Purpose Hasp Lockout made of two parts. Inner part is ABS + upper part is also ABS body, having six holes are there for group isolation.
- **Dimension** - Height 150 mm, width 46 mm, Internal Hole diameter 10 mm.
- **Weight** – 70 gm
- This device is available with or without cable
- **Color** – Red, Yellow, Blue and Green color make as per the required quantity



KRM-K-DPMLD

ITEM CODE	HEIGHT	WIDTH	PADLOCK HOLE DIA	NO OF HOLES	WEIGHT
KRM-K-DPMLD	150mm	46mm	10mm	6	70 gm



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.locktagindia.com



LOCKOUT/TAGOUT



CE
Certified

DI ELECTRIC MULTIPURPOSE LOCKOUT HASP

- **Material** – Both Part ABS
- KRM LOTO Multi Purpose Hasp Lockout made of two parts.. inner part is ABS + upper part is also ABS body, having six holes are there for group isolation.
- **Dimension**- Height 150 mm, width 46 mm, Internal Hole diameter 10 mm.
- **Weight** – 70 gm
- This device is available with or without cable
- **Color** – Red, Yellow, Blue and Green color make as per the required quantity



KRM-K-DPMLD

ITEM CODE	Height	Width	PADLOCK Hole dia	NO OF HOLES	WEIGHT
KRM-K-DPMLD	150mm	46mm	10mm	6	70gm

GSTIN No.: 06AACPW8746Q126,
 PAN No.: AACPW8746Q
 TIN No.: 06821328889,
 TAN no.: RTKKO3359G
 IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com

www.lockouttagouts.com

www.krmloto.com

www.locktagindia.com

www.lotoappliances.com



OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
 PAN No.: AAECK2831L
 TIN No.: 06824000112
 CIN No.: U31903HR2011PTC042508
 IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

KRM LOTO ECONOMY DI - ELECTRIC LABELED LOCKOUT HASP

- **Material** – ABS insulated properties
- Two part joined with aluminum rivet
- Easy to carry as it is lighter in weight, it can resolve the purpose of multiple isolation.
- Minimum 6 holes for locking purpose
- Provision of space for one /two more extra hole on it as require
- No need to put extra information tag on it
- It can be useful for lockout the electrical as well as mechanical installed devices hence it is a versatile device in nature and then tagout by an authorized person.
- Standard text matter on it as shown in picture , but can be customized on volume basis or can provide without printed text
- **Dimension** - height 147 mm, width of upper part is 10 mm and lower width part is 13 mm, internal Hole diameter – 8 mm
- **Weight** – 70 grms.
- **Color** – Standard color Red . Can make any color as per the quantity required. white Or any color make as per the required quantity



KRM-K-EDLLH



GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

LOCKOUT/TAGOUT



KRM-LOTO
SAFETY PRODUCTS
safe loto



KRM-K-EDLLH

ECONOMY DI - ELECTRIC LABELED LOCKOUT HASP

CE
Certified

- **Material** – ABS insulated properties
- Two part joined with aluminum rivet
- Easy to carry as it is lighter in weight, it can resolve the purpose of multiple isolation.
- Minimum 6 holes for locking purpose
- Provision of space for one /two more extra hole on it as require
- No need to put extra information tag on it
- It can be useful for lockout the electrical as well as mechanical installed devices hence it is a versa le device in nature and then Tagout by an authorized person.
- Standard text matter on it as shown in picture , but can be customized on volume basis or can provide without printed text
- **Dimension** - height 147 mm, width of upper part is 10 mm and lower width part is 13 mm, internal Hole diameter – 8 mm
- **Weight** – 70 gm
- **Color** – Standard color Red . Can make any color as per the quantity required, white Or any color make as per the required quantity

KRM CORPORATION

ISO 9001 - 9001:2015, ISO EMS 14001:2015, ISO 45001:2018
to meet OSHA'S Lockout Tagout Standard 29 CFR, 1910.147&1910.269

Postal Add: 615, Sector-15A, Faridabad-121007 Haryana - NCR (INDIA)
Regd. Office: 1H/31A, N.I.T. Faridabad-121001

KM Safetech Private Limited

QUALITY MANAGEMENT SYSTEM ISO 9001:2015

info@krmcorporation.com, info@krmloto.com, krmloto@gmail.com, wadharajinder@gmail.com

M: 00 91 9810 291 381, 8800 544 881, T: 00 91 129 - 4021 381
www.krmloto.com www.krmcorporation.com, www.safetyloto.com
www.lotoappliances.com, www.lockouttagouts.com

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

DIELECTRIC HASP HAVING PROVISION TO PUT FOR MULTIPLE LOCKS

- Material – Combination of ABS / Propylene
KRM LOTO Non Conductive Hasp's body is made of strong rigid ABS / Propylene having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally one hole to put padlocks for standardized isolation.
- **Shackle diameter** – 10 mm
- **Shackle height** – 20 mm
- **Weight** – 55grms.
- **Color** – Red Or any color make as per the required quantity



KRM-K-DEH-ST

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8800 544 881

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

LOCKOUT/TAGOUT



KRM-LOTO
SAFETY PRODUCTS
safe loto

DIELECTRIC LOCKOUT HASP HAVING PROVISION TO PUT FOR MULTIPLE LOCKS

CE
Certified



KRM-K-DEH-ST

- **Material** – Combination of ABS / Propylene KRM LOTO Non Conductive Hasp's body is made of strong rigid ABS / Propylene having excellent insulating characteristic and highly resistant to the chemical and can be utilized in magnetic field. Having totally one hole to put padlocks for standardized isolation.
- **Shackle diameter** – 10 mm
Shackle height – 20 mm
- **Weight** – 55 gm
- **Color** – Red Or any color make as per the required quantity

KRM CORPORATION

ISO QMS - 9001:2015, ISO EMS 14001:2015, ISO OHSMS 45001:2018
to meet OSHA's Lockout Tagout Standard 29 CFR, 1910.147 & 1910.269

Postal Add: 615, Sector-15A, Faridabad-121007 Haryana - NCR (INDIA)
Regd. Office: 1H/31A, N.I.T. Faridabad-121001

KRM Safetech Private Limited

QUALITY MANAGEMENT SYSTEM ISO QMS 9001:2015

info@krmcorporation.com, info@krmloto.com, krmloto@gmail.com, wadharajinder@gmail.com

M: 00 91 9810 291 381, 8800 544 881, T: 00 91 129 - 4021 381

www.krmloto.com www.krmcorporation.com, www.safetyloto.com
www.lotoappliances.com, www.lockouttagouts.com



Notes:

- Lock & Tag should be used with all loto products
- For group locking on particular energy hasp should be used.
- Group lockout box should be used for group lockout tagout.
- Scissor Cable or Round cable lockout can be used to lock multiple hazardous energies instead putting individual locks & tags.
- Every equipment/machine should have provision for energy isolation
- Placards for the isolation (types of energies) of machine/equipment should be hanged/pasted near respective machine/equipment