

OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Productsto meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

**KRM LOTO – S HOOK & CABLE HANGER****Index Page No:-1**

SR.NO	KRM LOTO PART CODE	PRODUCT NAME	WEIGHT (kg)	TECHNICAL PAGE NO.
1	KKRM-K-PSCH6	PVC S HOOK CABLE HANGER 6"	1.7	2
2	KKRM-K-PSCH9	PVC S HOOK CABLE HANGER 9"	1.7	2
3	KKRM-K-PSCH12	PVC S HOOK CABLE HANGER 12"	1.75	2
4	KKRM-K-PMSCH9	PVC ENCAPSULATED S HOOK CABLE HANGER 9"	1.75	3
5	KKRM-K-PMSCH12	PVC ENCAPSULATED S HOOK CABLE HANGER 12"	2.1	3
6	KKRM-K-PDSCH8	PVC DOUBLE S HOOK CABLE HANGER 8"	1.7	4
7	KKRM-K-3TCH	WIRE SAFETY TRI HOOK CABLE HANGER	1.8	5
8	KKRM-K-3TCH-FH	WIRE SAFETY TRI HOOK CABLE HANGER FOLDABLE LOCKING HOOK TYPE	2.7	6
9	KKRM-K-WWSH	WALL WIRE SAFETY HOOK HANGER	1.7	7
10	KKRM-K-HHES	HEXA HOOK EXTANDABLE HANGER STAND	1.7	8
11	KKRM-K-CRH	CABLE RAIL HOOK	1.7	9
12	KKRM-K-CH	CABLE HANGER	1.1	10
13	KKRM-K-WWSH-01	WALL WIRE SAFETY HOOK HANGER	1	11
14	KKRM-K-WWSH-02	WALL WIRE SAFETY HOOK HANGER	1	12
15	KKRM-K-WWSH-03	WALL WIRE SAFETY HOOK HANGER	1.5	13

OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Productsto meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269

www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com

www.lockouttagouts.com



www.krmloto.com

www.locktagindia.com

www.lotoappliances.com

PVC S HOOK CABLE HANGER

- Manufactured from insulating polypropylene, the S-Type Safety Cable Hangers are perfect for suspending cables, leads, hoses, and other work components off the ground, eliminating trip hazards and creating a safe work environment for personnel and vehicles.
- Material: PVC
- Maximum Load Capacity : 30kg
- Size- **KKRM-K-PSCH6** = 6" (152.5 mm) , **KKRM-K-PSCH9** = 9" (228.6 mm) , **KKRM-K-PSCH12** 12" (203.4 mm)
- It suspends cables from railings and bulkheads, ensuring that entrances, stairs, hangars, and corridors are kept accessible. They can also be used for the safe housekeeping of the hundreds of meters of cables and hoses needed at the workplace. There is a hole at each end of the hook that enables the operator to secure and affix the cable hook itself by means of a cable tie wrap; they are also suitable for bundled cables.
- S-Type Safety Cable Hangers are non-conductive.
- They are also used to support, suspend, and retain low and high-voltage cables in the offshore, marine.

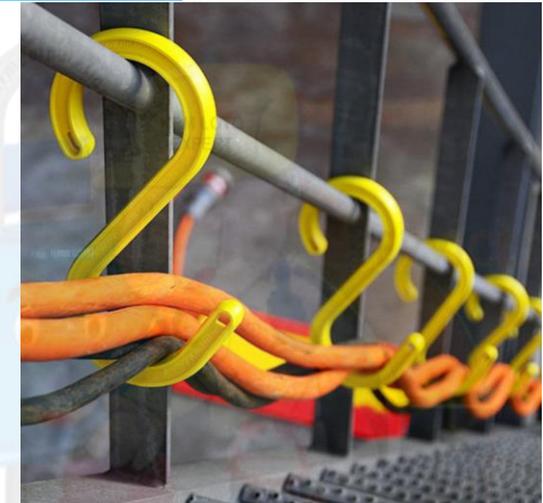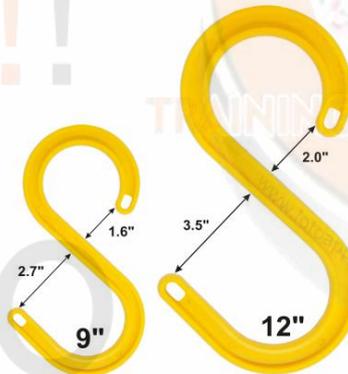

GSTIN No.: 06AAVPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN No.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

PVC ENCAPSULATED S HOOK CABLE HANGER

- Manufactured from insulating polypropylene, the S-Type Safety Cable Hangers are perfect for suspending cables, leads, hoses, and other work components off the ground, eliminating trip hazards and creating a safe work environment for personnel and vehicles.
- Material: PVC ENCAPSULATED (METAL WITH INSULATED COATING)
- Maximum Load Capacity : 40-300kg
- Size-**KKRM-K-PMSCH9** = 9" (228.6 mm), **KKRM-K-PMSCH12** 12" (203.4 mm)
- It suspends cables from railings and bulkheads, ensuring that entrances, stairs, hangars, and corridors are kept accessible. They can also be used for the safe housekeeping of the hundreds of meters of cables and hoses needed at the workplace. There is a hole at each end of the hook that enables the operator to secure and affix the cable hook itself by means of a cable tie wrap; they are also suitable for bundled cables.
- S-Type Safety Cable Hangers are non-conductive.
- They are also used to support, suspend, and retain low and high-voltage cables in the offshore, marine.

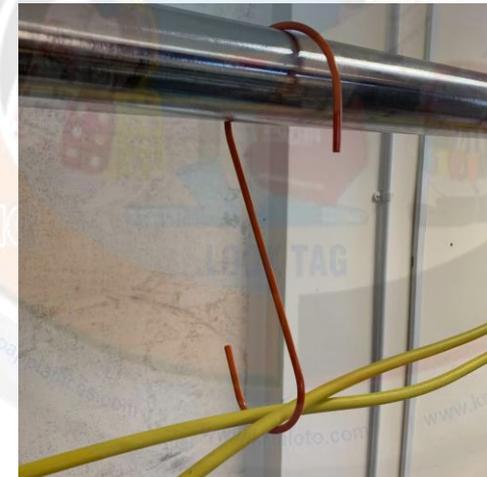


KKRM-K-PMSCH9



PVC DOUBLE S HOOK CABLE HANGER

- Manufactured from insulating polypropylene, the Double S-Type Safety Cable Hangers are perfect for suspending cables, leads, hoses, and other work components off the ground, eliminating trip hazards and creating a safe work environment for personnel and vehicles.
- Material: PVC
- Maximum Load Capacity : 40kg
- Size- 8" (203.2 mm)
- It suspends cables from railings and bulkheads, ensuring that entrances, stairs, hangars, and corridors are kept accessible. They can also be used for the safe housekeeping of the hundreds of meters of cables and hoses needed at the workplace. There is a hole at each end of the hook that enables the operator to secure and affix the cable hook itself by means of a cable tie wrap; they are also suitable for bundled cables.
- Double S-Type Safety Cable Hangers are non-conductive.
- They are also used to support, suspend, and retain low and high-voltage cables in the offshore, marine.

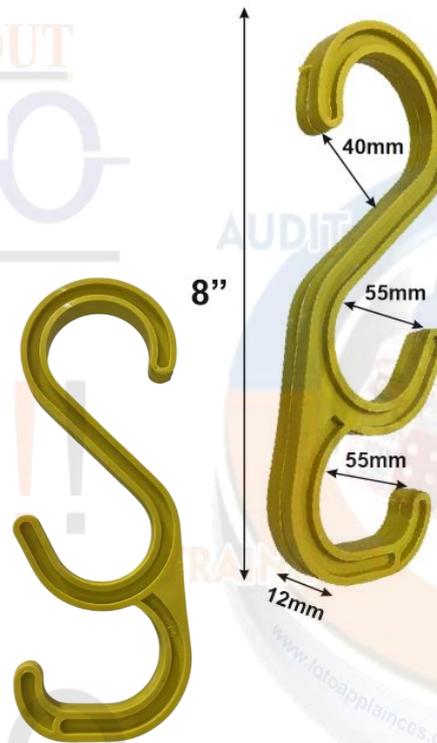

KKRM-K-PDSCH8





OEM Manufacturer & Global Supplier of
 Lockout Tagout & Safety Products

to meet
 OSHA'S Lockout Tagout Standard
 29 CFR, 1910.147&1910.269




www.lotoappliances.com



WIRE SAFETY TRI HOOK CABLE HANGER

- PVC Hanging Tri Hooks are carefully designed to lift trailing cables off the work floor and out of harm's way. These heavy-duty safety hangers are perfect for hanging cables from scaffolding, cable baskets, handrails, ceiling grids, and other secure overhead features.
- It provides a quick and easy way to suspend cables. If the work environment has no overhead features, the screw hole on the side allows it to be fixed to walls or ceilings.
- Hanging Tri Hooks offer easily removable top sections which the user can twist to disconnect. This kind of application is especially practical for use on stairwells and other areas with no overhead features.
- With a quick and easy installation requiring no fixing or adhesion, it's perfect for supporting temporary lighting.

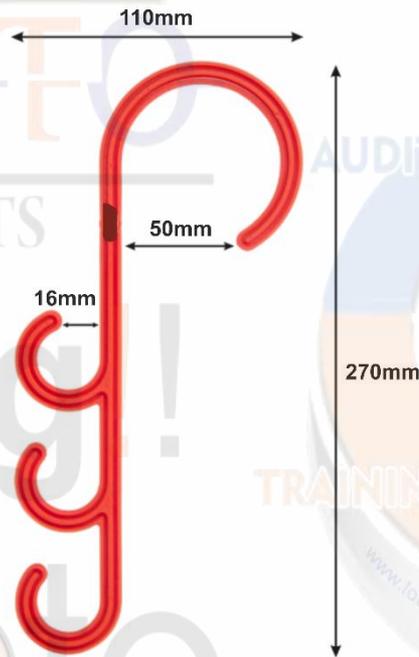

KKRM-K-3TCH

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN No.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L



Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

WIRE SAFETY TRI HOOK CABLE HANGER FOLDABLE LOCKING HOOK TYPE

- Hanging Tri Hooks are carefully designed to lift trailing cables off the work floor and out of harm's way. These heavy-duty safety hangers are perfect for hanging cables from scaffolding, cable baskets, handrails, ceiling grids, and other secure overhead features.
- It provides a quick and easy way to suspend cables. If the work environment has no overhead features, the screw hole on the side allows it to be fixed to walls or ceilings.
- Hanging Tri Hooks offer easily removable top sections which the user can twist to disconnect. This kind of application is especially practical for use on stairwells and other areas with no overhead features.
- With a quick and easy installation requiring no fixing or adhesion, it's perfect for supporting temporary lighting.

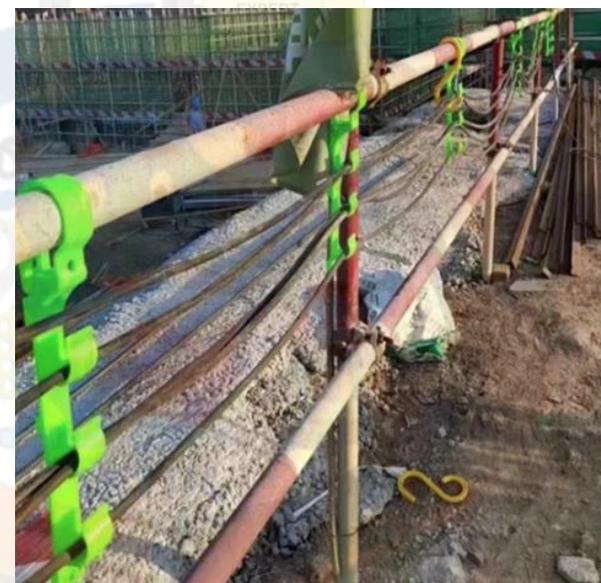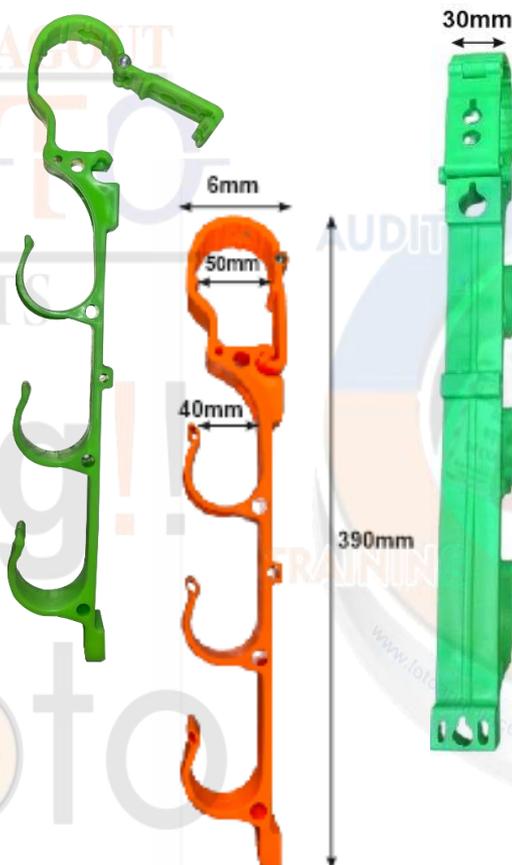

KKRM-K-3TCH-FH

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 0682132889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com

Email: info@krmloto.com, info@krmcorporation.com, krmloto@gmail.com

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA




GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

WALL WIRE SAFETY HOOK HANGER

- Wall Wire Holder is an advanced cable supporter that can be quickly and easily fixed to walls, door frames and other locations - using predrilled holes (screws supplied) to elevate cables off of the work surface and out of harm's way.
- Manufactured from high-quality ABS plastic, it can support several leads, cables, and hoses as a temporary or permanent fixture in its five housing compartments.
- It removes site tripping hazards during the construction and installation stages of a new build or retrofit projects, assisting safety practitioners in complying with various occupational health and safety regulations.
- When used on-site, its red color makes it highly visible, and it is fully reusable and recyclable.

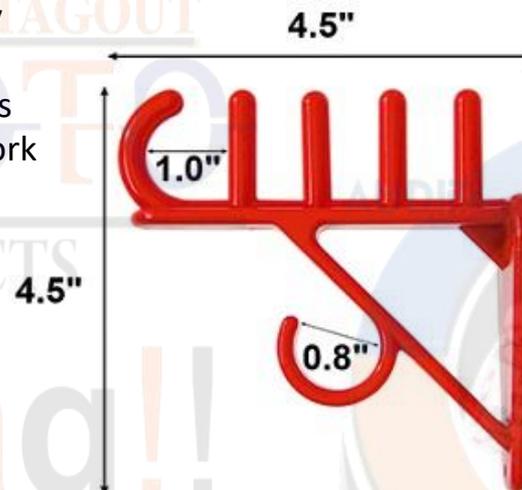

KCRM-K-WWSH



GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAMPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA


www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

HEXA HOOK EXTENDABLE HANGER STAND

- One of the most practical ways to eliminate the hazard of trailing cables is by using Hexa hook Hanger. It provides an easy and economical way to hang power leads, cables, and hoses up off the ground, securing them in an elevated position. Its six compartments support various-sized extension leads and air hoses.
- It not only protects personnel from electrocution and trip hazards, but also protects the cables from wear and tear, dirt, mud, water, and more. The Hexa hook is manufactured from injection-molded ABS plastic in yellow, made to safely carry multiple cables and hoses ranging in size. The Hexa hook Hanger is attached to the extendable tower stand, which can be raised to 2.5 m in height. The extendable lead stand is adjustable, portable, highly visible, extremely stable, and comes in three parts the base, extendable pole with two levers, and the head. The removable telescopic lead stand attachment makes the Hexa hook easy to store and transport. The stand also allows the freedom to move it around for easy movement of machines and personnel around work areas.
- It not only protects personnel from electrocution and trip hazards, but also protects the cables from wear and tear, dirt, mud, water, and more.
- The removable telescopic lead stand attachment makes the Hexa hook easy to store and transport.
- The stand also allows the freedom to move it around for easy movement of machines and personnel around work areas.



KKRM-K-HHES

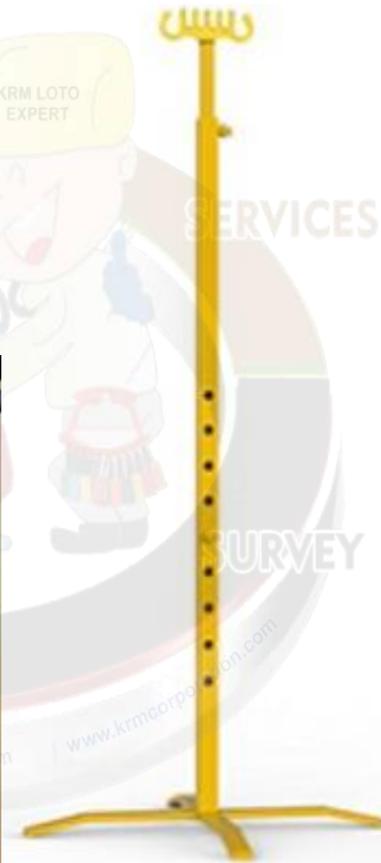

GSTIN No.: 06AAMPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147 & 1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office: 1H/31-A, N.I.T, Faridabad-121001 (Haryana) | Postal Office: 615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

CABLE RAIL HOOK

- The Cable Rail is an innovative system for the management of temporary or semi-permanent cables. The unique hook arrangement allows cables to be easily loaded in and held tight between two Cable Rails, spaced up to 15 feet apart. The Cable Rail is easily mounted with screws or cable ties to walls, poles, or columns. The Cable Rail is robust enough to handle rigorous use in challenging environments while also providing an economical solution to industrial cable management and safety.
- Dimensions: 3" x 9 5/8" x 1 3/8"
- Product weight: 181 Grams.
- Holds 5 AWG cables, up to 1/2" in diameter
- Easy cable loading
- Install with screws or cable ties
- Non-conductive
- Place horizontal or vertical
- Made from Nylon (PA)

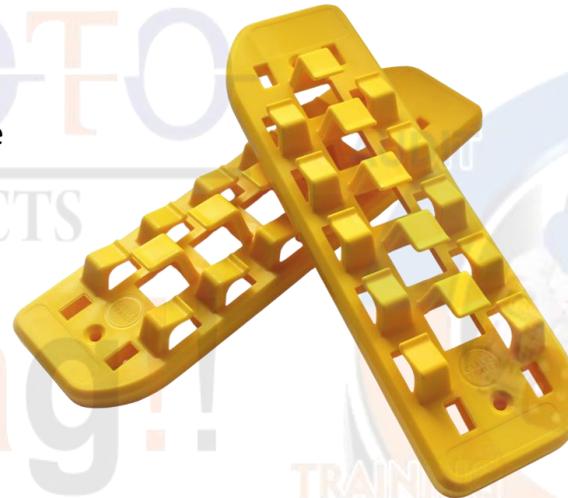

KKRM-K-CRH



GSTIN No.: 06AACPW8746Q1Z6,
PAN No.: AACPW8746Q
TIN No.: 0682132889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA


www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

CABLE HANGER

- PVC Rebar Hook -PVC Rebar Hook is used in construction field to avoid electrical short circuit for safety Purpose. It is providing to safety worker.
- Size- 8mm – 40mm
- Load – 10 kg – 40 kg
- Color- Multicolor.
- We are manufacturing many sizes like 8mm, 12mm, 16mm and 20mm normally use 8mm and 12mm in construction area.



KKRM-K-CH

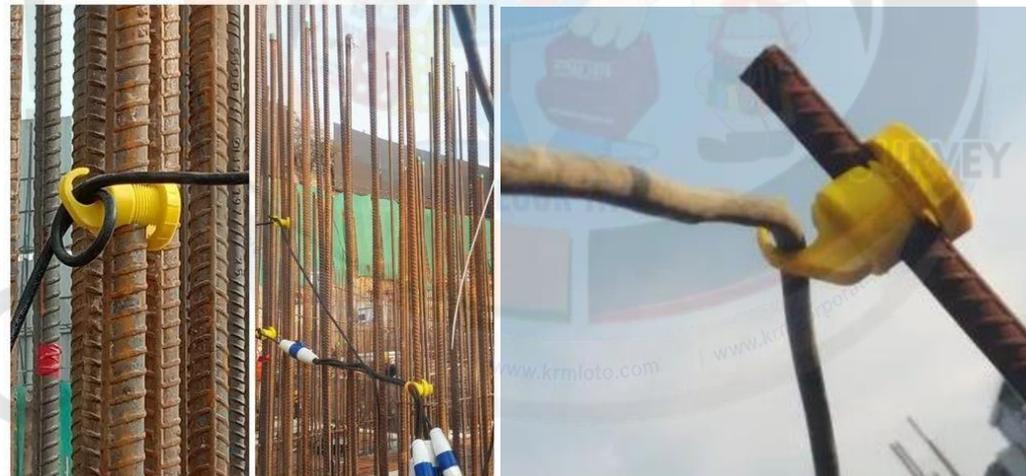

GSTIN No.: 06AACPW8746Q1Z6,
PAN No.: AACPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L

Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com

www.lockouttagouts.com



www.krmloto.com

www.locktagindia.com

www.lotoappliances.com

WALL WIRE SAFETY HOOK HANGER

- Efficient Cable Support Mining cable hook j clips are designed to secure mining cables in tunnels and coal, enabling quick and stable cable management that enhances work efficiency without hassle
- Plastic insulated hook measures approximately 230x145x30mm, offering ample size for cables up to 90mm diameter, providing a reliable alternative to typical cord clips and heavy-duty hooks
- Plastic Insulation Crafted from sturdy plastic insulation material, these hangers resist deformation and ensure performance under demanding mining conditions
- Versatile Utility Hooks Ideal for mining environments, these cable hangers serve well as wire supports and ceiling clips, supporting safe and organized cable routing in confined spaces
- Reliable Work Companion Designed for professionals managing mining cables, these hangers simplify installation and maintenance tasks, helping to maintain orderly workspaces during mining operations

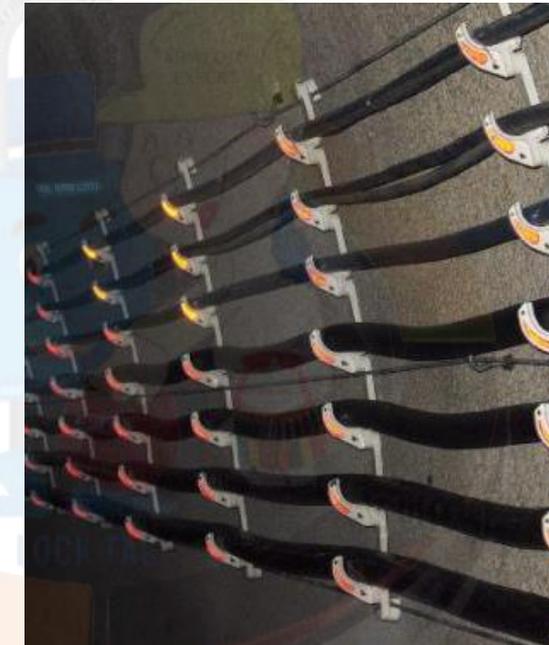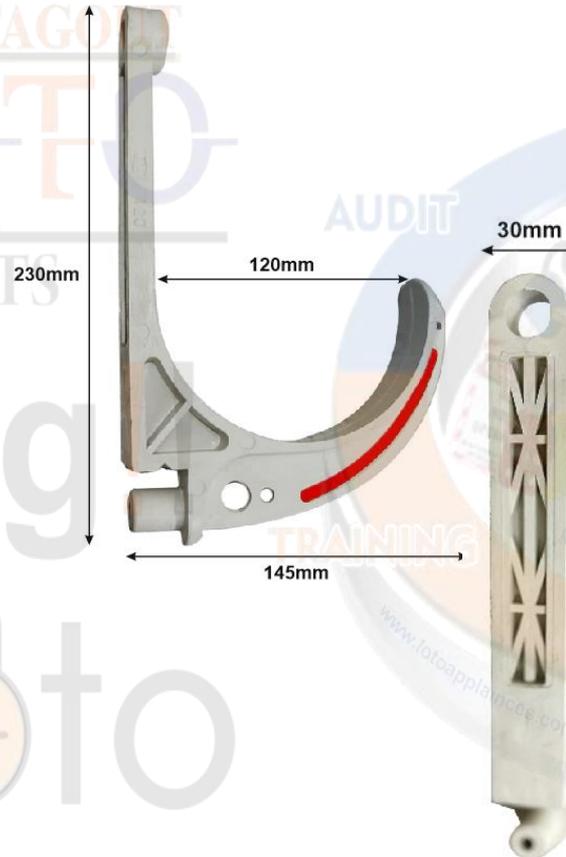

www.krmloto.com | www.krmcorp
KKRM-K-WWSH-01

GSTIN No.: 06AACPW8746Q1Z6,
PAN No.: AAVPW8746Q
TIN No.: 06821328889,
TAN no.: RTKKO3359G
IEC: 0509006116

M: 00 91 9810 291 381, 8900 544 881



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.lotoappliances.com



GSTIN No.: 06AAECK2831L1Z1
PAN No.: AAECK2831L
TIN No.: 06824000112
CIN No.: U31903HR2011PTC042508
IEC: AAECK2831L


Telefax: 00 91 129 4021 381, 413 1381 (D)

Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

WALL WIRE SAFETY HOOK HANGER

- Efficient Multiple Cables Support Mining cable 4 slots are designed to secure mining cables in tunnels and coal, enabling quick and stable cable management that enhances work efficiency without hassle
- Plastic insulated hook measures approximately 120x110x28mm, offering ample size for cables 5 to 20mm diameter with help of adjustable screw in the model of the hooks, providing a reliable alternative to typical cord clips and heavy-duty hooks for stable 4-5 cables.
- Plastic Insulation Crafted from sturdy plastic insulation material, these hangers resist deformation and ensure performance under demanding mining conditions
- Versatile Utility Hooks Ideal for mining environments, these cable hangers serve well as wire supports and ceiling clips, supporting safe and organized cable routing in confined spaces
- Reliable Work Companion Designed for professionals managing mining cables, these hangers simplify installation and maintenance tasks, helping to maintain orderly workspaces during mining operations

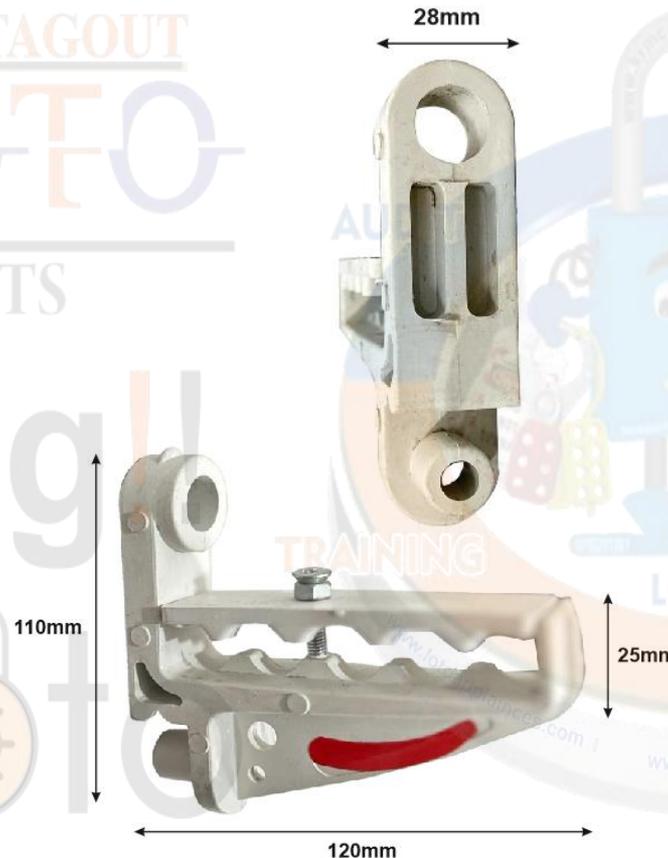

KKRM-K-WWSH-02



OEM Manufacturer & Global Supplier of
Lockout Tagout & Safety Products

to meet
OSHA'S Lockout Tagout Standard
29 CFR, 1910.147&1910.269



www.locktagindia.com




Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

WALL WIRE SAFETY HOOK HANGER

- Efficient Multiple Cables Support Mining cable 7 hooks j clips are designed to secure mining cables in tunnels and coal , enabling quick and stable cable management that enhances work efficiency without hassle
- Total 11 Plastic insulated hooks in 3 layers, first 2 layers having 8 hooks offering ample size for cables up to 18mm diameter, and last layers having 3 hooks offering ample size for cables up to 23mm diameter Total Dimension of hooks holder is 200x95x30mm.
- Plastic Insulation Crafted from sturdy plastic insulation material, these hangers resist deformation and ensure performance under demanding mining conditions
- Versatile Utility Hooks Ideal for mining environments, these cable hangers serve well as wire supports and ceiling clips, supporting safe and organized cable routing in confined spaces
- Reliable Work Companion Designed for professionals managing mining cables, these hangers simplify installation and maintenance tasks, helping to maintain orderly workspaces during mining operations

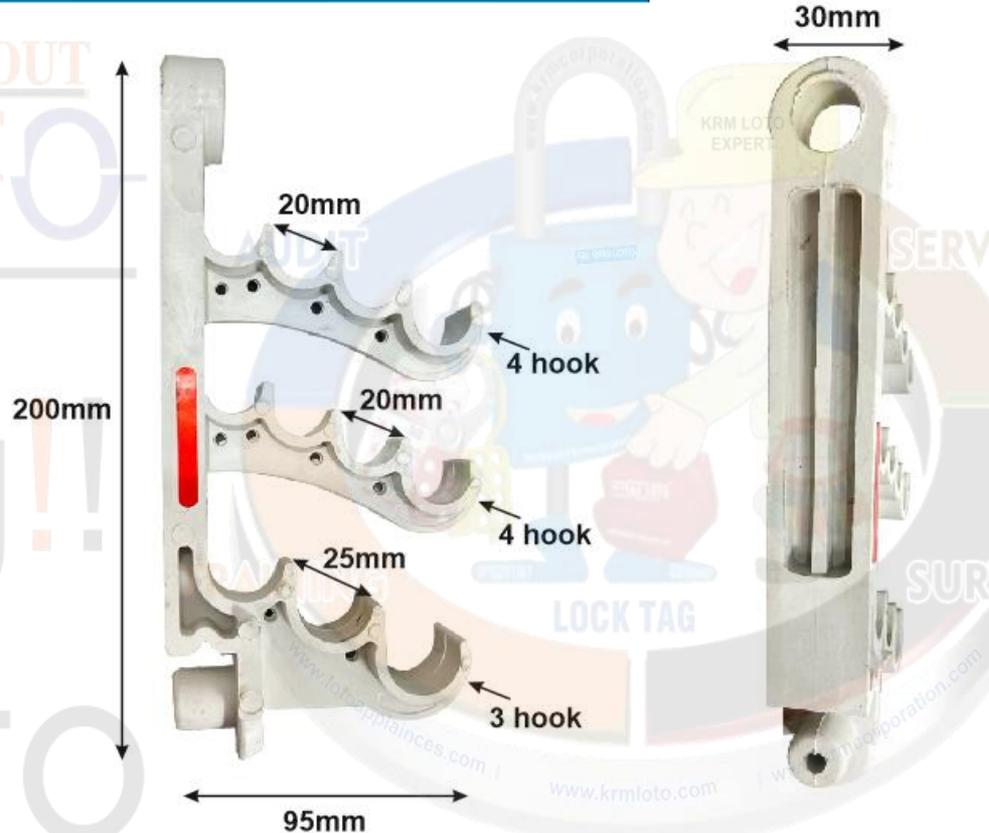

KKRM-K-WWSH-03