



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

**KRM LOTO – LOCK TAG PADLOCK METAL SHACKLE – ROUND KEY** STANDARD ENGRAVED ALPHABETS & NUMERICAL NUMBER ON LOCK BODY & KEY HEAD.

- ABS plastic body with metal cylinder.
- PADLOCK---Molded lock structure durability - key system: DIFFER KEY, ALIKE KEY OPTION
- Key in round shape with molded **BLACK** head which will always be black in color. Key Combination differ key vary up to 10000 - 20000 nos. as per production in a single shipment order and repeat same configuration after that .
- Key retaining feature in unlocked Position . Available in One or Two key option as per cost.
- Configuration as additional key card label as well as lock label (15mm wide max), easy to know personal ID indicating the corresponding padlock for easy management against additional cost.
- **Body Material** – ABS plastic body
- **Shackle Material** – Metal Shackle.
- **Shackle Thickness** – 5 mm
- **C. Key** : Round key with molded **BLACK** head.
- **Color** - Red, Blue, Green, Yellow, Black (AS PER STOCK AVAILABILITY)
- **Weight** – 55gm ( +10%)
- **KRM LOTO – WEBSITE – DANGER – LOCKED OUT – DO NOT REMOVE** in built laser on one side of lock body.
- **There is one additional small hole in the body to put additional wire seal for anything to make double protection not to open the lock without any authorized person**



BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	OVERALL SHACKLE HIEGHT INCLUDING THICKNESS (40+5) 45 mm	SHACKLE THICKNESS (F) 5 mm
28.5 mm	35	17		



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com




Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

**KRM LOTO – LOCK TAG PADLOCK METAL SHACKLE – ROUND KEY** STANDARD ENGRAVED ALPHABETS & NUMERICAL NUMBER ON LOCK BODY & KEY HEAD.

- ABS plastic body with metal cylinder.
- PADLOCK---Molded lock structure durability - key system: DIFFER KEY, ALIKE KEY OPTION
- Key in round shape with molded **BLACK** head which will always be black in color. Key Combination differ key vary up to 10000 - 20000 nos. as per production in a single shipment order and repeat same configuration after that .
- Key retaining feature in unlocked Position . Available in One or Two key option as per cost.
- Configuration as additional key card label as well as lock label (15mm wide max), easy to know personal ID indicating the corresponding padlock for easy management against additional cost.
- **Body Material** – ABS plastic body
- **Shackle Material** – Metal Shackle.
- **Shackle Thickness** – 5 mm
- **C. Key** : Round key with molded **BLACK** head.
- **Color** - Red, Blue, Green, Yellow, Black (AS PER STOCK AVAILABILITY)
- **Weight** – 55gm ( +10%)
- **KRM LOTO – WEBSITE – DANGER – LOCKED OUT – DO NOT REMOVE** in built laser on one side of lock body.
- **There is one additional small hole in the body to put additional wire seal for anything to make double protection not to open the lock without any authorized person**

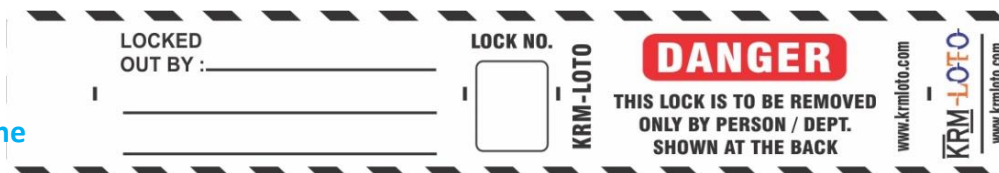

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	OVERALL SHACKLE HIEGHT INCLUDING THICKNESS (40+5) 45 mm	SHACKLE THICKNESS (F) 5 mm
28.5 mm	35	17		



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com




Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

**KRM LOTO – LOCK TAG PADLOCK METAL SHACKLE – ROUND KEY**

- ABS plastic body with metal cylinder.
- PADLOCK----Molded lock structure durability - key system: DIFFER KEY, ALIKE KEY OPTION
- Key in round shape with molded **BLACK** head which will always be black in color. Key Combination differ key vary up to 10000 - 20000 nos. as per production in a single shipment order and repeat same configuration after that .
- Key retaining feature in unlocked Position . Available in One or Two key option as per cost.
- Configuration as additional key card label as well as lock label (15mm wide max), easy to know personal ID indicating the corresponding padlock for easy management against additional cost.
- **Body Material** – ABS plastic body
- **Shackle Material** – Metal Shackle.
- **Shackle Thickness** – 5 mm
- **C. Key** : Round key with molded **BLACK** head.
- **Color** - Red, Blue, Green, Yellow, Black (AS PER STOCK AVAILABILITY) .
- **Weight** – 55gm ( +10%)
- **KRM LOTO – WEBSITE – DANGER – LOCKED OUT – DO NOT REMOVE** in built laser on one side of lock body.
- **There is one additional small hole in the body to put additional wire seal for anything to make double protection not to open the lock without any authorized person**



**STANDARD ENGRAVED ALPHABETS & NUMERICAL NUMBER ON LOCK BODY & KEY HEAD.**



BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	OVERALL SHACKLE HIEGHT INCLUDING THICKNESS	SHACKLE THICKNESS (F)
28.5 mm	35	17	(40+5) 45 mm	5 mm



OEM Manufacturer & Global Supplier of  
Lockout Tagout & Safety Products

to meet  
OSHA'S Lockout Tagout Standard  
29 CFR, 1910.147&1910.269



www.lotoappliances.com



Regd. Office:1H/31-A, N.I.T, Faridabad-121001 (Haryana) Postal Office:615, Sector-15-A, Faridabad-121007-Haryana-NCR-INDIA

www.krmcorporation.com | www.lockouttagouts.com | www.krmloto.com | www.locktagindia.com | www.lotoappliances.com

**KRM LOTO – LOCK TAG PADLOCK METAL LONG SHACKLE – ROUND KEY**

- ABS plastic body with metal cylinder.
- PADLOCK---Molded lock structure durability - key system: DIFFER KEY, ALIKE KEY OPTION
- Key in round shape with molded **BLACK** head which will always be black in color. Key Combination differ key vary up to 10000 - 20000 nos. as per production in a single shipment order and repeat same configuration after that .
- Key retaining feature in unlocked Position . Available in One or Two key option as per cost.
- Configuration as additional key card label as well as lock label (15mm wide max), easy to know personal ID indicating the corresponding padlock for easy management against additional cost.
- **Body Material** – ABS plastic body
- **Shackle Material** – Metal Shackle.
- **Shackle Thickness** – 5 mm
- **C. Key** : Round key with molded **BLACK** head.
- **Color** - Red, Blue, Green, Yellow, Black (AS PER STOCK AVAILABILITY) .
- **Weight** – 55gm ( +10%)
- **KRM LOTO – WEBSITE – DANGER – LOCKED OUT – DO NOT REMOVE** in built laser on one side of lock body.
- **There is one additional small hole in the body to put additional wire seal for anything to make double protection not to open the lock without any authorized person**



**STANDARD ENGRAVED ALPHABETS & NUMERICAL NUMBER ON LOCK BODY & KEY HEAD.**



BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	OVERALL SHACKLE HIEHT INCLUDING THICKNESS	SHACKLE THICKNESS (F)
28.5 mm	35	17	(60+5) 65 mm	5 mm



**KRM LOTO – METAL BODY SAFETY PADLOCK – ROUND KEY**

- Metal body with metal cylinder.
- PADLOCK----Molded lock structure durability - key system: DIFFER KEY, ALIKE KEY OPTION
- Key in round shape with molded **BLACK** head which will always be black in color. Key Combination differ key vary up to 10000 - 20000 nos. as per production in a single shipment order and repeat same configuration after that .
- Key retaining feature in unlocked Position . Available in One or Two key option as per cost.
- Configuration as additional key card label as well as lock label (15mm wide max), easy to know personal ID indicating the corresponding padlock for easy management against additional cost.
- **Body Material** – Metal body
- **Shackle Material** – Metal Shackle.
- **Shackle Thickness** – 5 mm
- **C. Key** : Round key with molded **BLACK** head.
- **Weight** – 55gm ( +10%)
- **KRM LOTO – WEBSITE – DANGER – LOCKED OUT – DO NOT REMOVE** in built laser on one side of lock body.
- **There is one additional small hole in the body to put additional wire seal for anything to make double protection not to open the lock without any authorized person**



**STANDARD ENGRAVED ALPHABETS & NUMERICAL NUMBER ON LOCK BODY & KEY HEAD.**

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	OVERALL SHACKLE HIEGHT INCLUDING THICKNESS	SHACKLE THICKNESS (F)
28.5 mm	35	17	(40+5) 45 mm	5 mm



**KRM LOTO – METAL BODY SAFETY PADLOCK – ROUND KEY**

- Metal body with metal cylinder.
- PADLOCK----Molded lock structure durability - key system: DIFFER KEY, ALIKE KEY OPTION
- Key in round shape with molded **BLACK** head which will always be black in color. Key Combination differ key vary up to 10000 - 20000 nos. as per production in a single shipment order and repeat same configuration after that .
- Key retaining feature in unlocked Position . Available in One or Two key option as per cost.
- Configuration as additional key card label as well as lock label (15mm wide max), easy to know personal ID indicating the corresponding padlock for easy management against additional cost.
- **Body Material** – Metal body
- **Shackle Material** – Metal Shackle.
- **Shackle Thickness** – 5 mm
- **C. Key** : Round key with molded **BLACK** head.
- **Weight** – 55gm ( +10%)
- **KRM LOTO – WEBSITE – DANGER – LOCKED OUT – DO NOT REMOVE in built laser on one side of lock body.**
- **There is one additional small hole in the body to put additional wire seal for anything to make double protection not to open the lock without any authorized person**



**STANDARD ENGRAVED ALPHABETS & NUMERICAL NUMBER ON LOCK BODY & KEY HEAD.**

BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	OVERALL SHACKLE HIEGHT INCLUDING THICKNESS	SHACKLE THICKNESS (F)
28.5 mm	35	17	(60+5) 65 mm	5 mm